


1 NEW WORK PLAN - KS2 E414 SCALE: 1/4" = 1'-0"

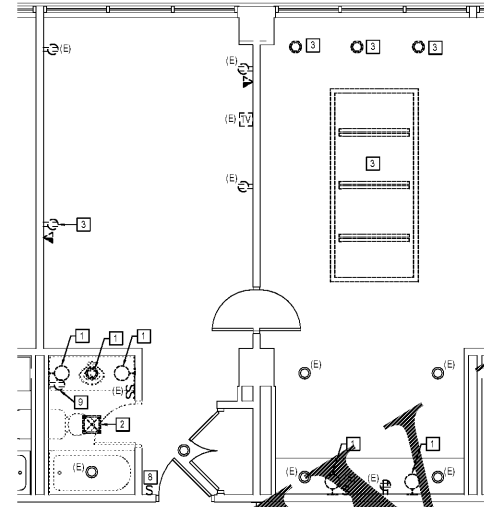


2 DEMOLITION PLAN - KS2 E414 SCALE: 1/4" = 1'-0"

KEY NOTES

- 1 E.C. TO DISMANTLE AND REMOVE EXISTING WALL MOUNTED LIGHT FIXTURES. E.C. TO REUSE EXISTING LIGHTING CIRCUIT TO POWER NEW FIXTURES REFER TO NEW WORK PLAN.
- 2 E.C. TO DISMANTLE AND REMOVE EXISTING EXHAUST FAN. E.C. TO REUSE EXISTING CIRCUIT TO POWER NEW EXHAUST FAN/LIGHT UNIT REFER TO NEW WORK PLAN.
- 3 E.C. TO REMOVE EXISTING WALL MOUNTED LIGHTS. E.C. SHALL REUSE EXISTING CIRCUIT TO POWER NEW LIGHTS REFER TO NEW WORK PLAN.
- 4 E.C. TO PROVIDE NEW LED LIGHT SWITCH. E.C. SHALL REUSE CONTROL WIRING FOR NEW LED MIRROR FIXTURE.
- 5 E.C. TO PROVIDE DOUBLE SWITCH WITH EXHAUST/LIGHT COMBO. EXHAUST FAN SHALL BE SWITCHED SEPARATELY.
- 6 E.C. TO PROVIDE NEW SWITCH ON BOX FOR NEW LIGHTED MIRROR. E.C. TO REUSE EXISTING SWITCH.
- 7 E.C. TO PROVIDE NEW COMPLEX RECEPTACLE. E.C. SHALL TIE NEW RECEPTACLE TO EXISTING CIRCUIT SERVING GUEST ROOM. E.C. TO PROVIDE NEW NEW TV CONNECTIONS AS REQUIRED, REFER TO NEW WORK DRAWING.
- 8 E.C. TO PROVIDE NEW ILLUMINATED ROCKER SWITCH LEVITON MODEL # 744-25811-2WS AT NEW LOCATION SHOWN ON NEW WORK PLAN. E.C. SHALL PROVIDE ALL NECESSARY EQUIPMENT TO CONTROL EXISTING LIGHT FIXTURE.
- 9 E.C. TO REMOVE EXISTING RECEPTACLE. E.C. TO PROVIDE AND INSTALL NEW 120V GFI RECEPTACLE, REFER TO NEW WORK DRAWING FOR LOCATION. E.C. SHALL REUSE EXISTING CIRCUIT TO FEED NEW RECEPTACLE.
- 10 E.C. PROVIDE NEW 20A-120V RECEPTACLE FOR MICROWAVE. COORDINATE MOUNTING HEIGHT WITH ARCHITECT. E.C. SHALL ROUTE CIRCUIT TO NEAREST AVAILABLE 20A-1P CIRCUIT AND UPDATE PANEL DIRECTORY.
- 11 E.C. TO PROVIDE AND INSTALL NEW TELEPHONE JACK. E.C. SHALL ROUTE 3/4" EMPTY CONDUIT WILL PULL STRINGS UP TO ACCESSIBLE ABOVE CEILING SPACE.
- 12 E.C. TO PROVIDE AND INSTALL NEW EXHAUST FAN/LIGHT COMBO UNIT. BROAD SERIES 744, MODEL #744L-ED.

NOTE: E.C. TO COORDINATE WITH ARCHITECTURAL DRAWINGS FOR EXACT LOCATIONS AND MOUNTING HEIGHTS OF DEVICES IN GUEST ROOMS.



Order Plans @ WWW.LDOnline.com