


NO.	ROOM NAME	FLOOR CODE	BASE CODE	WALL CODE	CEILING CODE	NOTES
100	SEATING AREA	FC-02	WB-01	NOTE #1	CT-01	1,3,4
101	SALES AREA	FC-01	WB-01	NOTE #1	CT-01	1,3,4
101A	SERVICE AREA	FC-05	WB-02	NOTE #1	CT-03/PX-30	1,3,4
102	KITCHEN	FC-05	WB-02	FRP-01	CT-03	3,4
103	DRIVE THRU	FC-05	WB-02	FRP-01	CT-03/PX-30	3,4
104	WASH	FC-05	WB-02	FRP-01	CT-03	3,4
105	PREP AREA	FC-05	WB-02	FRP-01	CT-03	3,4
106	OFFICE	FC-05	WB-02	FRP-01	PX-30	2,3,4
107	WOMEN	FC-01 ALT	N/A	NOTE #1	PX-30	1,2,3,4
108	MEN	FC-01 ALT	N/A	NOTE #1	PX-30	1,2,3,4
109	ALCOVE	FC-01	WB-01	NOTE #1	CT-03	1,2,3,4

1 NOT USED
1/4" = 1'-0" NOTE

NO.	LOCATION	SIZE	MATERIAL	TYPE	FINISH	FRAME DATA	FINISH	NOTES
101A	DINING	3'-0" X 7'-0" X 1 3/4"	ALUM/GL	A	FACT	ALUM	3	FACT 1 AND 4
106	OFFICE	3'-0" X 6'-8" X 1 3/4"	WOOD	C	SEE ELEV.	H.M.	1	SEE ELEV. 4 AND 5
107	WOMEN'S TOILET	3'-0" X 6'-8" X 1 3/4"	WOOD	C	SEE ELEV.	H.M.	1	SEE ELEV. 2 AND 4
108	MEN'S TOILET	3'-0" X 6'-8" X 1 3/4"	WOOD	C	SEE ELEV.	H.M.	1	SEE ELEV. 2 AND 4
110	UTILITY	2'-6" X 6'-8" X 1 3/4"	WOOD	C	SEE ELEV.	H.M.	1	SEE ELEV. 4 AND 5

2 NOT USED
1 1/2" = 1'-0" NOTE

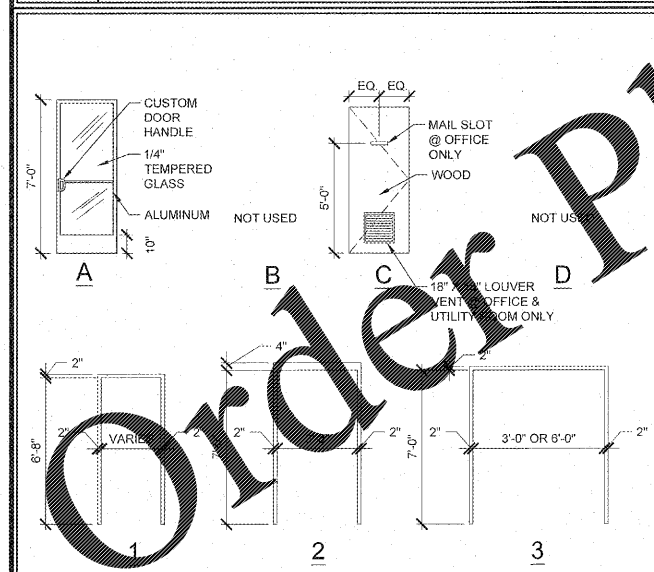

3 DOOR AND OPENING FRAME TYPES
1/4" = 1'-0" NOTE

NO.	ITEM	MANUFACTURER & PRODUCT #	MOUNTING HEIGHT	REMARKS
A	GRAB BARS	ASI 3701-18P (18"), -36P (36") & -42P (42")	36" MAX. A.F.F. NOTE C	
B	TOILET TISSUE DISPENSER	KC PROFESSIONAL #09551	24" A.F.F. NOTE C,D	
C	COAT HOOK (ACCESSIBLE)	Bobrick #B-7671	48" A.F.F. NOTE C	
D	SOAP DISPENSER	DERMA FOAM E-1000 CHEMICAL COMPANY	NOTE A, C	
E	HAND DRYER	EXCEL 2000 INC XL-BV	NOTE A, C & E	
F	MIRROR	AS 0620-243	40" A.F.F. TO BOTTOM, NOTE C	
G	CHEMICAL DISPENSER	P&G	NOTE A, C	
H	WASTE RECEPTACLE	ASI 0458	36" A.F.F. FOR ADA	
I	BABY CHANGING STATION	ASI 9012 HORIZONTAL	SEE INSTALLATION INSTRUCTIONS	
J	SWINGING GRAB BAR	BOBRICK #B-4998.99	SEE INSTALLATION INSTRUCTIONS	
K	SANITARY NAPkin DISPOSAL	ASI 0852	OPTIONAL ITEM	
L	HEAT COVER DISPENSER	ASI 0477 5M		
M	WALL SHELF	ASI 0692-516 (16")	42" A.F.F. FOR ADA; NOTE C	
N	TOILET PARTITIONS	BOBRICK HOL-1042	PROVIDED BY OWNER, INSTALLED BY G.C.	

4 TOILET EQUIPMENT SCHEDULE
Checked: 03/22/17

DOOR SCHEDULE
Checked: 11/13/2015

1. PROVIDE 1" INSULATED & TEMPERED GLASS; FRAME TO MATCH STOREFRONT COLOR
2. UNDERCUT DOOR 1"
3. PROVIDE 90 DEGREE DOOR VIEWER CENTERED IN DOOR @ 5'-0" A.F.F. - MODEL 55148B FROM DAVSTAR SECURITY
4. REFER TO DUNKIN' BRANDS SPECIFICATIONS FOR HARDWARE SCHEDULE FOR ALL DOORS.
5. PROVIDE LOUVERED VENT @ EACH DOOR FOR UTILITY ROOM AND OFFICE. REFER TO LOCAL CODES FOR SIZING OF DOORS.
6. ADD DOUBLE-ACTING GLASS DOOR TO SEPARATE SERVICE AREA FROM PREP AREA WHEN APPLICABLE (NOT SHOWN); REFER TO NATIONAL ACCOUNTS FOR CONTACT INFO. DOOR LAMINATE TO BE FORMICA DESERT BEIGE

PLUMBING GENERAL NOTES

1. ALL WORK SHALL BE PERFORMED BY A LICENSED CONTRACTOR. CONTRACTOR SHALL INSTALL SYSTEMS, EQUIPMENT, AND COMPONENTS IN ACCORDANCE WITH ALL MINIMUM REQUIREMENTS SHOWN IN THESE PLANS. ANY DEVIATION FROM THE DESIGN PLANS SHALL BE APPROVED BY THE OWNER REPRESENTATIVE OR THE DESIGN ENGINEER. ALL WORK SHALL MEET OR EXCEED THE MINIMUM REQUIREMENTS OF ALL APPLICABLE CODES AND STANDARDS. HOWEVER, ANY DEVIATION FROM THE DESIGN PLANS IMPLIED BY LOCAL CODES THAT SUGGESTS INSTALLATION OF LESS THAN THE REQUIREMENTS SPECIFIED IN THESE PLANS SHALL NOT BE ALLOWED WITHOUT APPROVAL BY THE OWNER REPRESENTATIVE OR THE DESIGN ENGINEER.
2. P.C. SHALL PROVIDE AND SHALL ALL PLUMBING FIXTURES (WITH TRIM), SOIL, WASTE, AND VENT PIPING; HOT/COLD WATER PIPING; INSULATION, AND VALVES; COMPRESSED AIR PIPING; AND ALL OTHER NECESSARY EQUIPMENT TO MAKE THEM OPERATIONAL. P.C. SHALL MAKE ALL FINAL CONNECTIONS TO EQUIPMENT REQUIREMENTS.
3. SHALL TERMINATE ALL INDIRECT WASTE PER STATE PLUMBING CODE REQUIREMENTS (2" AIR GAP OR MORE EFFECTIVE) IN DIAMETER WHICHEVER IS LARGER).
4. P.C. SHALL COMPLY WITH ALL ASSOCIATED REQUIREMENTS WITH LOCAL UTILITIES AND CODE OFFICIALS FOR CONNECTION TO CITY SANITARY SEWER, CW SUPPLY, AND STORM DRAINAGE SYSTEMS. P.C. SHALL OBTAIN, OBTAIN, AND PAY FOR ALL PERMITS AND FEES THAT ARE REQUIRED. P.C. SHALL MAINTAIN AND CONFORM TO ALL REQUIREMENTS TO PREVENT BACKFLOW OR BACK SIPHONAGE IN ACCORDANCE WITH LOCAL CODES.
5. SHALL MAINTAIN MINIMUM DISTANCE REQUIRED BETWEEN WATER SUPPLY AND DRAIN PIPING AS REQUIRED BY CODE.
6. P.C. SHALL TEST DRAIN, VENT, GAS AND WATER SUPPLY PIPING IN ACCORDANCE WITH ALL APPLICABLE CODE REQUIREMENTS.

GENERAL ADA PLUMBING NOTES

A. WATER CLOSET CONTROLS SHALL BE OPERABLE WITH ONE HAND, AND SHALL NOT REQUIRE TIGHT GRASPING, PINCHING, OR TWISTING OF THE WRIST.
B. CONTROLS FOR FLUSHING OF WATER CLOSETS AND URINALS SHALL BE MOUNTED ON THE WIDE SIDE OF TOILET AREAS, NO MORE THAN 43 1/2" A.F.F.
C. THE FORCE REQUIRED TO ACTIVATE CONTROLS SHALL BE NO GREATER THAN 5 POUNDS FORCE.
D. IF SELF-CLOSING VALVES ARE USED, THEY SHALL REMAIN OPEN FOR AT LEAST 10 SECONDS.
E. FAUCET CONTROLS AND OPERATING MECHANISM SHALL NOT BE OF THE TYPE REQUIRING TIGHT GRASPING, PINCHING OR TWISTING OF THE WRIST (OPERABLE WITH ONE HAND SUCH AS LEVER-OPERATED) AND AN OPERATING FORCE NOT EXCEEDING 5 POUNDS.
F. LAV. - INSULATE ALL EXPOSED PLUMBING LINES AND DRAINS.

4 NOTE
N.T.S. NOTE

NO.	ROOM NAME	FLOOR CODE	BASE CODE	WALL CODE	CEILING CODE	NOTES
100	SEATING AREA	FC-02	WB-01	NOTE #1	CT-01	1,3,4
101	SALES AREA	FC-01	WB-01	NOTE #1	CT-01	1,3,4
101A	SERVICE AREA	FC-05	WB-02	NOTE #1	CT-03/PX-30	1,3,4
102	KITCHEN	FC-05	WB-02	FRP-01	CT-03	3,4
103	DRIVE THRU	FC-05	WB-02	FRP-01	CT-03/PX-30	3,4
104	WASH	FC-05	WB-02	FRP-01	CT-03	3,4
105	PREP AREA	FC-05	WB-02	FRP-01	CT-03	3,4
106	OFFICE	FC-05	WB-02	FRP-01	PX-30	2,3,4
107	WOMEN	FC-01 ALT	N/A	NOTE #1	PX-30	1,2,3,4
108	MEN	FC-01 ALT	N/A	NOTE #1	PX-30	1,2,3,4
109	ALCOVE	FC-01	WB-01	NOTE #1	CT-03	1,2,3,4

1. REFER TO INTERIOR ELEVATIONS FOR PROPER WALL FINISHES IN DESIGNATED AREA
2. SEE INTERIOR ELEVATIONS FOR DOOR FINISHES
3. PROVIDE ALUMINUM CORNER GUARDS AT ALL OUTSIDE CORNERS OF WALLS, SEE FLOOR
4. G.C. TO VERIFY ALL FINISHES WITH DBI CM PRIOR TO ORDERING MATERIALS

TOILET EQUIPMENT SCHEDULE
Checked: 03/22/17

CODE	ITEM	MANUFACTURER & PRODUCT #	MOUNTING HEIGHT	REMARKS
A	GRAB BARS	ASI 3701-18P (18"), -36P (36") & -42P (42")	36" MAX. A.F.F. NOTE C	
B	TOILET TISSUE DISPENSER	KC PROFESSIONAL #09551	24" A.F.F. NOTE C,D	
C	COAT HOOK (ACCESSIBLE)	Bobrick #B-7671	48" A.F.F. NOTE C	
D	SOAP DISPENSER	DERMA FOAM E-1000 CHEMICAL COMPANY	NOTE A, C	
E	HAND DRYER	EXCEL 2000 INC XL-BV	NOTE A, C & E	
F	MIRROR	AS 0620-243	40" A.F.F. TO BOTTOM, NOTE C	
G	CHEMICAL DISPENSER	P&G	NOTE A, C	
H	WASTE RECEPTACLE	ASI 0458	36" A.F.F. FOR ADA	
I	BABY CHANGING STATION	ASI 9012 HORIZONTAL	SEE INSTALLATION INSTRUCTIONS	
J	SWINGING GRAB BAR	BOBRICK #B-4998.99	SEE INSTALLATION INSTRUCTIONS	
K	SANITARY NAPkin DISPOSAL	ASI 0852	OPTIONAL ITEM	
L	HEAT COVER DISPENSER	ASI 0477 5M		
M	WALL SHELF	ASI 0692-516 (16")	42" A.F.F. FOR ADA; NOTE C	
N	TOILET PARTITIONS	BOBRICK HOL-1042	PROVIDED BY OWNER, INSTALLED BY G.C.	

NOTES
NOTE A: OPERATING CONTROLS OF ALL HAND DRYERS, SOAP DISPENSERS AND MULTIPURPOSE UNITS TO BE 42" A.F.F.
NOTE B: G.C. TO FIELD VERIFY ALL SIZES
NOTE C: PROVIDE BLOCKING FOR ALL WALL MOUNTED FIXTURES AND ACCESSORIES
NOTE D: TOILET TISSUE & PAPER TOWEL DISPENSERS SUPPLIED FREE FROM LOCAL DCP; INSTALLED BY G.C.
NOTE E: HAND DRYER TO BE ORDERED FROM NATIONAL ACCOUNT SUPPLIER, AND IS REQUIRED TO HAVE STANDARD DBI GREEN MESSAGING/BRANDING.

TOILET EQUIPMENT
HANDS-FREE TOILET EQUIPMENT IS REQUIRED FOR USE IN BATHROOMS

WALL MOUNTED LAVATORY: WALL MOUNTED LAVATORY - "COMRADE" BY AMERICAN STANDARD #024.131. PROVIDE ELECTRONIC HANDWASHING FAUCET SLOAN OPTIMA HET-600 W/ TRANSFORMER HEL-154 AND AERATOR #ETE-1024-A. FLUSH LEVER ON WIDE SIDE. WALL MOUNTED LAVATORY MUST MEET LOW FLOW STANDARD OF 0.5 GPM WITH AUTOMATIC SENSORS SIMILAR TO AMERICAN STANDARD #024.131.
TOILET: "MADERA" BY AMERICAN STANDARD - #3043.102. PROVIDE SLOAN FLUSHMETER ROYAL #111E5-S W/ TRANSFORMER HEL-154, RECOMMENDED WORKING PRESSURE BETWEEN 25 PSI AT VALVE WHEN FLUSHING AND 80 PSI STATIC. FLUSH LEVER ON WIDE SIDE. TOILET MUST MEET LOW FLOW STANDARD OF 1.285 GPF SIMILAR TO AMERICAN STANDARD "MADERA" #3043.102.
URINAL: "ALLBROOK" FLOWISE 0.5 GPF W/ SIPHON JET BY AMERICAN STANDARD. PROVIDE FLUSH VALVE SELECTRONIC #6063.051002 BY AMERICAN STANDARD

ROOM FINISH SCHEDULE
Checked: 03/22/17

NATIONAL ACCOUNT INFORMATION:

NOTE: FOR COMPLETE NATIONAL ACCOUNTS SOURCE INFORMATION, REFER TO THE DUNKIN' BRANDS NATIONAL ACCOUNT WEBSITE (http://extranet.dunkinbrands.com). TO OBTAIN A USER NAME AND PASSWORD PLEASE CONSULT YOUR LOCAL CONSTRUCTION MANAGER

NOTE: CONTRACTOR TO IDENTIFY ONESELF AS WORKING WITH DUNKIN' BRANDS WHEN ORDERING FROM NATIONAL ACCOUNTS

CONTACT INFORMATION FOR NATIONAL ACCOUNTS:

INDUSTRIAL DESIGN, FINISHES & COORDINATION SERVICES:
DUNKIN' BRANDS DESIGN CENTER
1000 W. 10TH AVENUE, SUITE 1000
DENVER, CO 80202
P: 303-733-8800
WWW.DUNKINBRANDS.COM

EXTERIOR DESIGN & COORDINATION SERVICES:
DUNKIN' BRANDS EXTERIOR DESIGN CENTER
1000 W. 10TH AVENUE, SUITE 1000
DENVER, CO 80202
P: 303-733-8800
WWW.DUNKINBRANDS.COM

WALL MOUNTED LAVATORY:
SLOAN OPTIMA HET-600 W/ TRANSFORMER HEL-154 AND AERATOR #ETE-1024-A
SLOAN OPTIMA HET-600 W/ TRANSFORMER HEL-154 AND AERATOR #ETE-1024-A
SLOAN OPTIMA HET-600 W/ TRANSFORMER HEL-154 AND AERATOR #ETE-1024-A

TOILET:
SLOAN OPTIMA HET-600 W/ TRANSFORMER HEL-154 AND AERATOR #ETE-1024-A
SLOAN OPTIMA HET-600 W/ TRANSFORMER HEL-154 AND AERATOR #ETE-1024-A
SLOAN OPTIMA HET-600 W/ TRANSFORMER HEL-154 AND AERATOR #ETE-1024-A

URINAL:
ALLBROOK FLOWISE 0.5 GPF W/ SIPHON JET BY AMERICAN STANDARD
ALLBROOK FLOWISE 0.5 GPF W/ SIPHON JET BY AMERICAN STANDARD
ALLBROOK FLOWISE 0.5 GPF W/ SIPHON JET BY AMERICAN STANDARD

THESE PLANS ARE CONFIDENTIAL PROPERTY OF DUNKIN' BRANDS, INC. UNLESS OTHERWISE INDICATED.

dunkin' brands

PROJECT NO.: 17229

NRD national restaurant designers
ARCHITECTS & ENGINEERS
3005 Carrington MB Blvd., Morrisville, NC 27560
ph: 919 544 7251 fax: 919 544 9399

A Division of LHM Associates

NO.	DESCRIPTION	DATE	SCALE	DRAWN	AY	TD	APPD
1	OWNER COMMENTS (RESTROOM CHANGE)	5/27/18					

DD FRESH BREW 1.0
908 MARKET DRIVE, EMPORIA, VA

MISC. DETAILS, SCHEDULES, AND NATIONAL ACCOUNT INFORMATION

PC# 358084

A-10.0