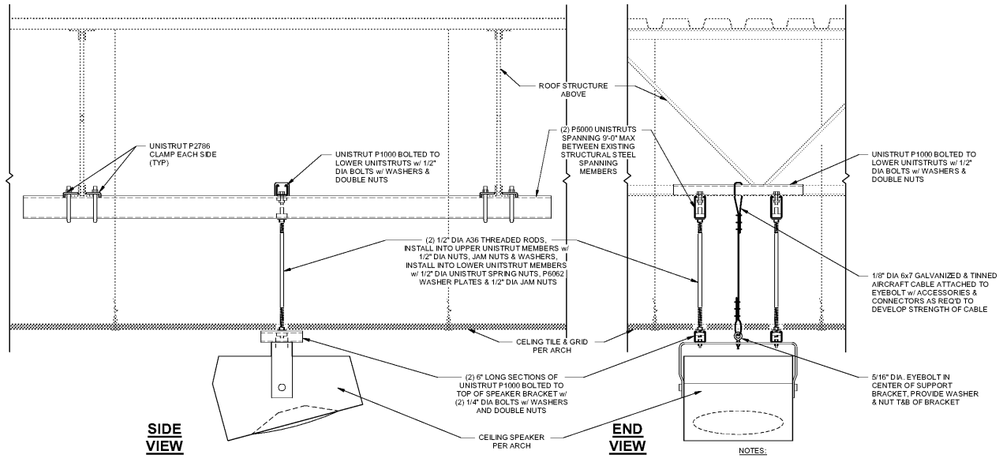

NOTES:

1. GENERAL CONTRACTOR SHALL COORDINATE ALL SPEAKER LOCATIONS, LIGHTING, ETC. w/ ARCH / MEP DRAWINGS.
2. THE MAXIMUM SPEAKER AND BRACKET WEIGHT ALLOWED FOR THIS DETAIL IS 36.5 LBS. IF THE WEIGHT OF THE EQUIPMENT RECEIVED EXCEEDS THIS WEIGHT, THE INSTALLER AND GENERAL CONTRACTOR MUST CONTACT THE ARCHITECT FOR A REVISED DETAIL.
3. REFER TO 2/PLFS0.4 FOR UNISTRUT ATTACHMENT AT UNEVEN ROOF STRUCTURE OR EXISTING DUCTWORK INTERFERENCE.

1 / PLFS0.4 CEILING SUSPENDED SPEAKER - LEFT TO RIGHT STRUCTURE
N.T.S.

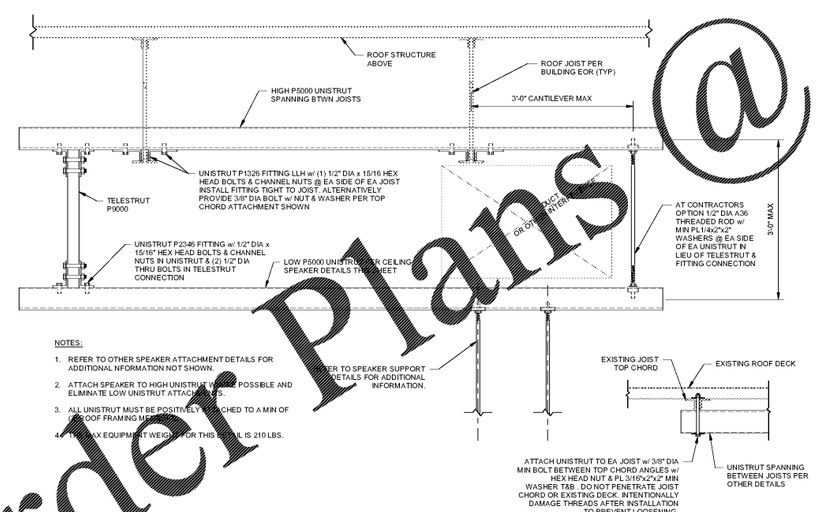

NOTES:

1. REFER TO OTHER SPEAKER ATTACHMENT DETAILS FOR ADDITIONAL NFORMATION NOT SHOWN.
2. ATTACH SPEAKER TO HIGH UNISTRUT WHERE POSSIBLE AND ELIMINATE LOW UNISTRUT ATTACHMENTS.
3. ALL UNISTRUT MUST BE POSITIVELY ATTACHED TO A MIN OF (2) ROOF FRAMING MEMBERS.
4. THE MAX EQUIPMENT WEIGHT FOR THIS DETAIL IS 210 LBS.

REFER TO SPEAKER SUPPORT DETAILS FOR ADDITIONAL INFORMATION.

TOP CHORD ATTACHMENT DETAIL

2 / PLFS0.4 UNISTRUT ALTERNATE ATTACHMENT DETAIL
N.T.S.

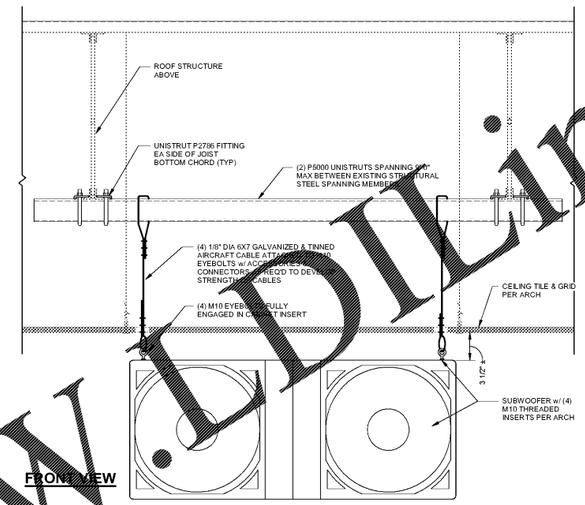

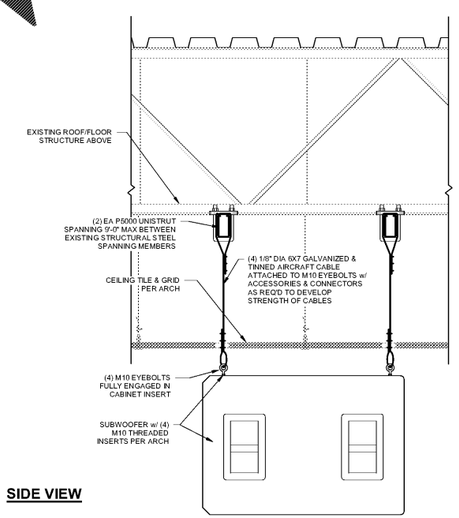

NOTES:

1. GENTERAL CONTRACTOR SHALL COORDINATE ALL SPEAKER LOCATIONS, LIGHTING, ETC. w/ ARCH / MEP DRAWINGS.
2. THESE SPEAKER SUPPORT DETAILS ARE FOR NEW OR EXISTING RELOCATED SPEAKERS.
3. THE MAXIMUM SUBWOOFER AND BRACKET WEIGHT ALLOWED FOR THIS DETAIL IS 210 LBS. IF THE WEIGHT OF THE EQUIPMENT RECEIVED EXCEEDS THIS WEIGHT, THE INSTALLER AND GENERAL CONTRACTOR MUST CONTACT THE ARCHITECT FOR A REVISED DETAIL.
4. REFER TO 2/PLFS0.4 FOR UNISTRUT ATTACHMENT AT UNEVEN ROOF STRUCTURE OR EXISTING DUCTWORK INTERFERENCE.

3 / PLFS0.4 CEILING SUSPENDED SUBWOOFER SECTIONS
N.T.S.

GEORGIA REGISTERED No. PE031789 PROFESSIONAL ENGINEER JEFFREY D. PRATT

ISSUE DATE: 5/2[illegible]/2018

PMA Engineering
4717 Shawnee Mission Parkway
Suite 105 Fairway, Kansas 66205
www.pmaengineering.com
(913) 384-8118 fax (913) 384-8116

SHEET LEGEND

G001	GENERAL INFORMATION & SCOPE OF WORK
M001	MECHANICAL LEGEND & NOTES
M201	ROOF PLAN & DUCTWORK
A201	EXTERIOR & INTERIOR ELEVATIONS
A601	ENLARGED PLANS
A651	ENLARGED ELEVATIONS
A651	EXTERIOR & INTERIOR DETAILS
A651	ENLARGED PLANS, ELEVATIONS, FINISH SCHEDULE, FIXTURE PLANS
S1.00	FOUNDATION PLAN
S1.01	FOUNDATION PLAN
S1.02	FOUNDATION SECTIONS
S1.03	FOUNDATION SECTIONS
S1.04	FOUNDATION SECTIONS
S1.05	FOUNDATION SECTIONS
S1.06	FOUNDATION SECTIONS
S1.07	FOUNDATION SECTIONS