## DOOR SCHEDULE

| # | LOCATION | SIZE: WIDTH | SIZE: HEIGHT | SIZE: THICK | DOOR: MATERIAL | DOOR: FINISH | DOOR: TYPE | FRAME: MATERIAL | FRAME: FINISH | THRESHOLD | HARDWARE |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 1 | SWING GATE | 3'-0" | 2'-0" | 1 3/4" | NTM-2 ON ALL SURFACES | - | TYPE D | NONE | NONE | NONE | SET #D |
| 2 | LAMINATED DBL SWG DR | 3'-0" | 7'-0" | 1" | LAMINATE TO MATCH PL-2 | FACTORY | TYPE A | HM | STAINLESS STEEL | NONE | SET #A |
| 3 | (E) RESTROOM | 3'-0" | 7'-0"* | 1 3/4" | EXISTING | P-5 | TYPE B | EXISTING | P-5 | NONE | EXISTING |

* UNDERCUT DOOR PER MECHANICAL NOTES

## DOOR HARDWARE

| # | QTY. | ITEM | DESCRIPTION MFG. NUMBER | MFG. | FINISH | REMARKS |
|---|---|---|---|---|---|---|
| A | 2 | KICK PLATE | 18" | ELIASON | STAINLESS STEEL | DOOR TO BE ELIASON SCP8 WITHOUT DOOR STOPS. KICK PLATE AND PUSH PLATES TO BE PROVIDED ON BOTH SIDES. REINFORCE JAMBS AT HARDWARE LOCATIONS. |
| | 2 | PUSH PLATE | 6" X 12" | ELIASON | STAINLESS STEEL | |
| | 1 | VISION PANEL | 9" X 30" | ELIASON | MANUF. | |
| | 1 | TOP PIVOT | | ELIASON | MANUF. | |
| | 1 | BOTTOM PIVOT | | ELIASON | MANUF. | |
| D | - | DOUBLE-ACTING SPRING HINGES | - | BOMMER | BRASS | DOOR TO BE 3/4" MDF. FINISH ALL SURFACES WITH NTM-2. BOTTOM OF DOOR SHALL BE 4" ABOVE FININSH FLOOR. QUANTITY AND SIZE OF HINGES AS REQUIRED FOR DOOR WEIGHT, V.I.F. |

## DOOR TYPES

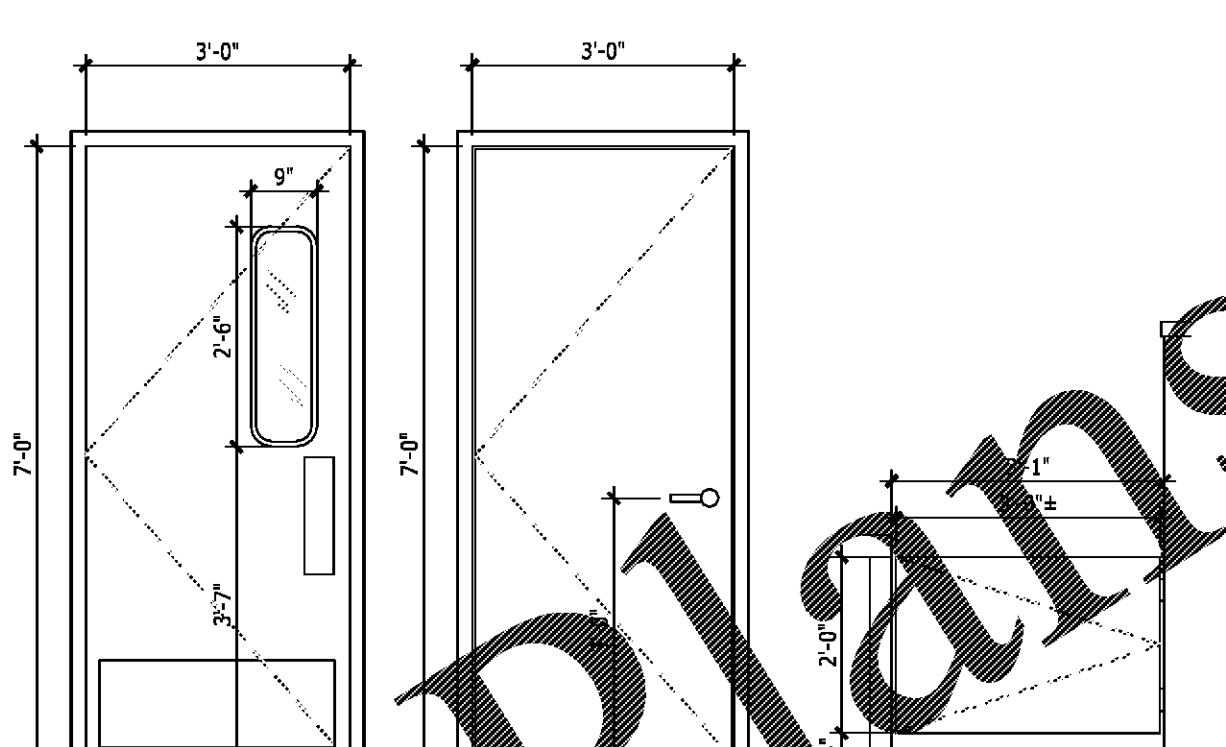


## DOOR NOTES

A. HARDWARE FINISHES SHALL BE SATIN BRASS 606/US4 UNLESS NOTED OTHERWISE.
B. ALL LOCKSETS & LATCH SETS SHALL BE LEVER HANDLES
C. VERIFY ALL EXISTING DOOR HARDWARE TO COMPLY WITH CURRENT CODE. SHALL NOT REQUIRE TIGHT GRASPING, TIGHT PINCHING OR TWISTING OF THE WRIST TO OPERATE. VERIFY EXISTING DOOR HANDLES, PULLS, LATCHES, LOCKS & OTHER OPERATING DEVICES ARE INSTALLED BETWEEN 34" - 48" AFF.
D. GC TO INSTALL OWNER PROVIDED CORES PER HARDWARE SCHEDULE AT TIME OF STORE TURNOVER.
E. AT EXISTING DOORS TO REMAIN, VERIFY THAT EXISTING DOOR HARDWARE MEETS OR EXCEEDS THE REQUIREMENTS OF THE SPECIFIED HARDWARE. REPLACE AS REQUIRED.
F. DOORS WITH CLOSERS SHALL COMPLY WITH THE FOLLOWING:
   1. 5LBF MAXIMUM FORCE FOR OPENING DOOR
   2. FROM AN OPEN POSITION OF 70°, DOOR SHALL TAKE AT LEAST 3 SECONDS TO MOVE TO A POINT 3 INCHES FROM THE LATCH, MEASURED TO THE LEADING EDGE OF THE DOOR.
G. DOORS / FRAMES SHALL BE "TIMELY" FACTORY FINISH 'WESTERN WHITE' OR EQUAL, U.O.N.
H. LEVER SETS TO BE FALCON GRADE 1 WITH INTERCHANGEABLE CORES. T-SERIES OR APPROVED EQUAL. LEVER TO BE AVALON STYLE.

## ABBREVIATION LEGEND

| | | | |
|---|---|---|---|
| AA | AUDIBLE ALARM | DV | DOOR VIEWER |
| AC | ALARM CONTACT | HM | HOLLOW METAL |
| AL | ALUMINUM | MHO | MAGNETIC HOLD OPEN |
| CGL | CLEAR GLASS | WD | WOOD |
| CONC | CONCRETE | | |
| CPT | CARPET | | |
| CWGL | CLEAR WIRE GLASS | | |

**2 DOOR SCHEDULE, HARDWARE, AND DOOR TYPES**
NO SCALE

**HAAGEN-DAZS**
**INTERIOR FINISH SCHEDULE**
WEST TOWN MALL

| CODE | MATERIAL | LOCATION | MANUFACTURER | PRODUCT | DESCRIPTION/ COLOR | DIMENSION | ADDITIONAL INFORMATION |
|---|---|---|---|---|---|---|---|
| **CEILING FINISHES** | | | | | | | |
| ACT-1 | LAY-IN CEILING | SUPPORT ROOM | USG | N/A | #3270 WHITE VINYL FACED GYP. BD. | 2' X 4' | IN EXISTING GRID. USDA APPROVED MATERIAL FOR FOOD PREP AREAS |
| ACT-2 | LAY-IN CEILING | SUPPORT ROOM | USG | N/A | #3260 WHITE VINYL FACED GYP. BD. | 2' X 2' | USDA APPROVED MATERIAL FOR FOOD PREP AREAS |
| ACT-3 | LAY-IN CEILING | TOILET ROOM | EXISTING | | | 2' X 4' | IN EXISTING GRID. |
| P-1 | PAINT | GENERAL CEILING | GLIDDEN PROFESSIONAL | SEE NOTE | #[illegible]83/006 ATMOSPHERE CEILING FINISH: FLAT | N/A | **NOTE: CONTACT MANUFACTURER TO OBTAIN APPROPRIATE PAINT, PRIMER AND PAINT GRADE FOR SUBSTRATE/ MATERIALS SPECIFIED.** |
| **WALL FINISHES** | | | | | | | |
| FRP-1 | FIBER-REINFORCED PANEL | SUPPORT ROOM | MARLITE | WALL COVERING | P 100 WHITE PEBBLED FINISH | .09" | BY GENERAL CONTRACTOR |
| CT-4 | CERAMIC TILE | ACCENT WALL | DALTILE | YACHT CLUB GLAZED PORCELAIN TILE | YC01 TOPSAIL | 6" X 24" 3/8" THICK | CONTACT: National.accounts@daltile.com, (877) 556-5728 **NOTE: USE WITH GR-4 NOTE: INSTALL @ 45° ANGLE NOTE: 8" OFFSET REF: 6/A5.0** |
| CT-5 | CERAMIC TILE | GENERAL WALL | LUNGARNO CERAMICS | [illegible] TEXTURES [illegible] WALL TILE | [illegible]1001 WHITE GLOSSY | 4" X 12" 5/16" THICK | CONTACT: National.accounts@daltile.com, (877) 556-5728 **NOTE: USE WITH GR-1 NOTE: 3" OFFSET REF: 6/A5.0** |
| GR-1 | GROUT | GENERAL | CUSTOM BUILDING PRODUCTS | NON-SANDED | #381 BRIGHT WHITE 1/16" GROUT JOINT | N/A | CONTACT: National.accounts@daltile.com, (877) 556-5728 **NOTE: USE WITH CT-5** |
| GR-4 | GROUT | GENERAL | CUSTOM BUILDING PRODUCTS | NON-SANDED | #122 LINEN 1/16" GROUT JOINT | N/A | CONTACT: National.accounts@daltile.com, (877) 556-5728 **NOTE: USE WITH CT-4** |
| P-5 | PAINT | DOOR/DOOR FRAMES & TAPESTRY | GLIDDEN PROFESSIONAL | SEE NOTE | #30GY 88/014 WHITE ON WHITE FINISH: SEMI-GLOSS | | **NOTE: CONTACT MANUFACTURER TO OBTAIN APPROPRIATE PAINT, PRIMER AND PAINT GRADE FOR SUBSTRATE/ MATERIALS SPECIFIED.** |
| P-6 | PAINT | [illegible] WALL | GLIDDEN PROFESSIONAL | SEE NOTE | #80RR 07/260 DEEP GARNET FINISH: SATIN | | **NOTE: LET PAINT DRY FOR A MINIMUM OF 48 HOURS BEFORE APPLYING VINYL GRAPHICS** |
| TS-1 | TRANSITION STRIP | CERAMIC FLOOR TILE TO CERAMIC FLOOR TILE | SCHLUTER SYSTEMS | JOLLY A100AM | SATIN BRASS ALUMINUM | | |
| **FLOOR FINISHES** | | | | | | | |
| CT-2 | CERAMIC TILE | PUBLIC AREA | DALTILE | WALNUT CREEK GLAZED PORCELAIN TILE | SADDLEBROOK SD15 | 6" X 36" | CONTACT: NAN MCGINNIS AT LOUISVILLE TILE DISTRIBUTORS **NOTE: USE WITH GR-2 NOTE: 12" OFFSET REF: 6/A5.0** |
| CTB-1 | CERAMIC TILE BASE | GENERAL | DALTILE | WALNUT CREEK | SADDLEBROOK SD15 BULLNOSE | 3" X 18" | CONTACT: National.accounts@daltile.com, (877) 556-5728 **NOTE: USE WITH GR-2** |
| GR-2 | GROUT | GENERAL | CUSTOM BUILDING PRODUCTS | SANDED | #95 SABLE BROWN 1/8" GROUT JOINT | N/A | CONTACT: National.accounts@daltile.com, (877) 556-5728 **NOTE: USE WITH CT-2, CTB-1** |
| GR-5 | GROUT | SALES AREA & SUPPORT ROOM | CUSTOM BUILDING PRODUCTS | SANDED | #60 CHARCOAL 3/16" GROUT JOINT | N/A | CONTACT: National.accounts@daltile.com, (877) 556-5728 **NOTE: USE WITH QT-1, QTB-1** |
| QT-1 | QUARRY TILE | SALES AREA & SUPPORT ROOM | DALTILE | N/A | ASHEN GRAY #0T03 | 6"X6" | CONTACT: National.accounts@daltile.com, (877) 556-5728 **NOTE: USE WITH GR-5** |
| QTB-1 | QUARRY TILE | SALES AREA & SUPPORT ROOM | DALTILE | N/A | ASHEN GRAY #0T03 | 6"X6" 3/8" INTEGRAL COVE BASE | CONTACT: National.accounts@daltile.com, (877) 556-5728 **NOTE: USE WITH GR-5** |
| TS-1 | TRANSITION STRIP | CERAMIC FLOOR TILE TO CERAMIC FLOOR TILE | SCHLUTER SYSTEMS | JOLLY A100AM | SATIN BRASS ALUMINUM | | |
| **MILLWORK FINISHES** | | | | | | | |
| GL-1 | GLASS | SNEEZE GUARD | BY FIXTURE MANUFACTURER | TEMPERED | CLEAR | 3/8" THICKNESS W/ POLISHED EDGE | BY FIXTURE VENDOR. |
| GL-2 | GLASS | FRONT SIGNAGE BACKDROP OR SIDE WALLS ACCENT | BY GLASS VENDOR | GLASS PAINT BY GLASS PRIMER | GPPP083 TO MATCH PMS 7421C SPARY FINISH ONLY NO ROLLER BRUSH | 1/4" TEMPERED GLASS W/ 1/2" BRUSHED BRASS TRIM | CONTACT: http://www.glassprimer.com/ PH:888.619.2226 INSTALL WITH MIRROR MASTIC WITH A NEUTRAL- CURE SILICONE GLUE. (RECOMMENED GE SILICONE II) DOUBLE SIDED TAPE SERVES AS A TEMPORARY HOLD UNTILL THE SILICONE GLUE DRIES. SEE ELEVATIONS AND DETAIL FOR INSTALL. WALL SURFACE BEHIND GLAZING SHALL BE LEVEL 5 DRYWALL FINISH. |
| HPL-1 | HIGH-PRESSURE LAMINATE | COUNTER FACE | WILSONART | TRACELESS | 15505 BLACK VELVET | N/A | |
| ML-1 | METAL | MENU WALL SIDE RETURN, AT TOE KICK, HIGH BAR INLAY & ACCENT PANELS | CHEMETAL | ALUMINUM | 704 BRUSHED LIGHT BRASS | N/A | |
| NTM-2 | NANOTECH MATERIAL | COUNTER FACE | ARPA USA | FENIX NTM | 0029 BIANCO MALE COLOR CORE | 1.22 MM | CONTACT: Jessica Gorniez with Elite Stone Importers (732) 542-7900 jessica@elitestoneimporters.com |
| PL-2 | LAMINATE | DOOR | OCTOPUS PRODUCTS | OCTOLAM | 740M WHITE PEARLESCENT GLOSS | N/A | CONTACT: KEVIN COBURN AT OCTOPUS PRODUCTS LTD. (416) 531-5051 |
| SS-1 | SOLID SURFACE | COUNTER TOP | LG HAUSYS | HI-MACS MARMO | GENOVA M209 | 2 CM THICKNESS | CONTACT: JOE JOHNSON WITH LG HAUSYS AMERICA, INC (312) 805-5763 |
| WD-1 | WOOD | TOPPING LEDGE | | WALNUT | | N/A | CONTACT: LAURA PRUITT WITH BARN FURNITURE MART, (818)-780-4070. |

**HAAGEN-DAZS**
**STOREFRONT FINISH SCHEDULE**
WEST TOWN MALL

| CODE | MATERIAL | LOCATION | MANUFACTURER | PRODUCT | DESCRIPTION/ COLOR | DIMENSION | ADDITIONAL INFORMATION |
|---|---|---|---|---|---|---|---|
| CT-2 | CERAMIC TILE | SIGNAGE BACKDROP | DALTILE | WALNUT CREEK GLAZED PORCELAIN TILE | SADDLEBROOK SD15 | 6" X 36" | CONTACT: NAN MCGINNIS AT LOUISVILLE TILE DISTRIBUTORS **NOTE: USE WITH GR-2 NOTE: 12" OFFSET REF: 6/A5.0** |
| GR-2 | GROUT | GENERAL | CUSTOM BUILDING PRODUCTS | SANDED | #105 EARTH | N/A | CONTACT: LORI RING WITH HAMILTON PARKER (614) 778-1491 **NOTE: USE WITH CT-2** |
| SS-1 | SOLID SURFACE | PERIMETER TRIM | LG HAUSYS | HI-MACS MARMO | GENOVA M209 | 2 CM THICKNESS | CONTACT: JOE JOHNSON WITH LG HAUSYS AMERICA, INC (312) 805-5763 |

**1 FINISH SCHEDULE**
NO SCALE

Häagen-Dazs

SHOP# 1306
SPACE #1164
WEST TOWN MALL
7600 KINGSTON PIKE
KNOXVILLE, TN 37919

| No. | Revisions | Date |
|---|---|---|
| | | |


pdms design group
pdmsdesign.com
2225 East Randol Mill Road, Suite #300
Arlington, Texas 76011
817.633.4200 p • 817.633.4153 f



This document contains information proprietary to PDMS Design Group and is furnished in confidence for the limited purpose of evaluation, bidding, review, or construction. This document or its contents may not be used for any other purpose and may not be reproduced or disclosed to others without the prior written consent of PDMS Design Group



mrb
MICHAEL R. BLACK, AIA
2225 E. RANDOL MILL RD., SUITE 300
ARLINGTON, TEXAS 76011
817.701.4819
TENNESSEE REG. NO.: 104432


MICHAEL R. BLACK REGISTERED ARCHITECT AGRICULTURE COMMERCE No. 00104432 STATE OF TENNESSEE

| | |
|---|---|
| Project No. | 180165 |
| Scale | AS NOTED |
| Drawn | CAL |
| Checked | RER |
| Date | 06/29/2018 |

Drawing Title
**DOOR & FINISH SCHEDULE**

Drawing No. **A4.1**

V:\180165\180165_A4.1, 6/29/2018 9:30:12 AM, CLIVINGSTON


Order Plans @ WWW.LDILine.com