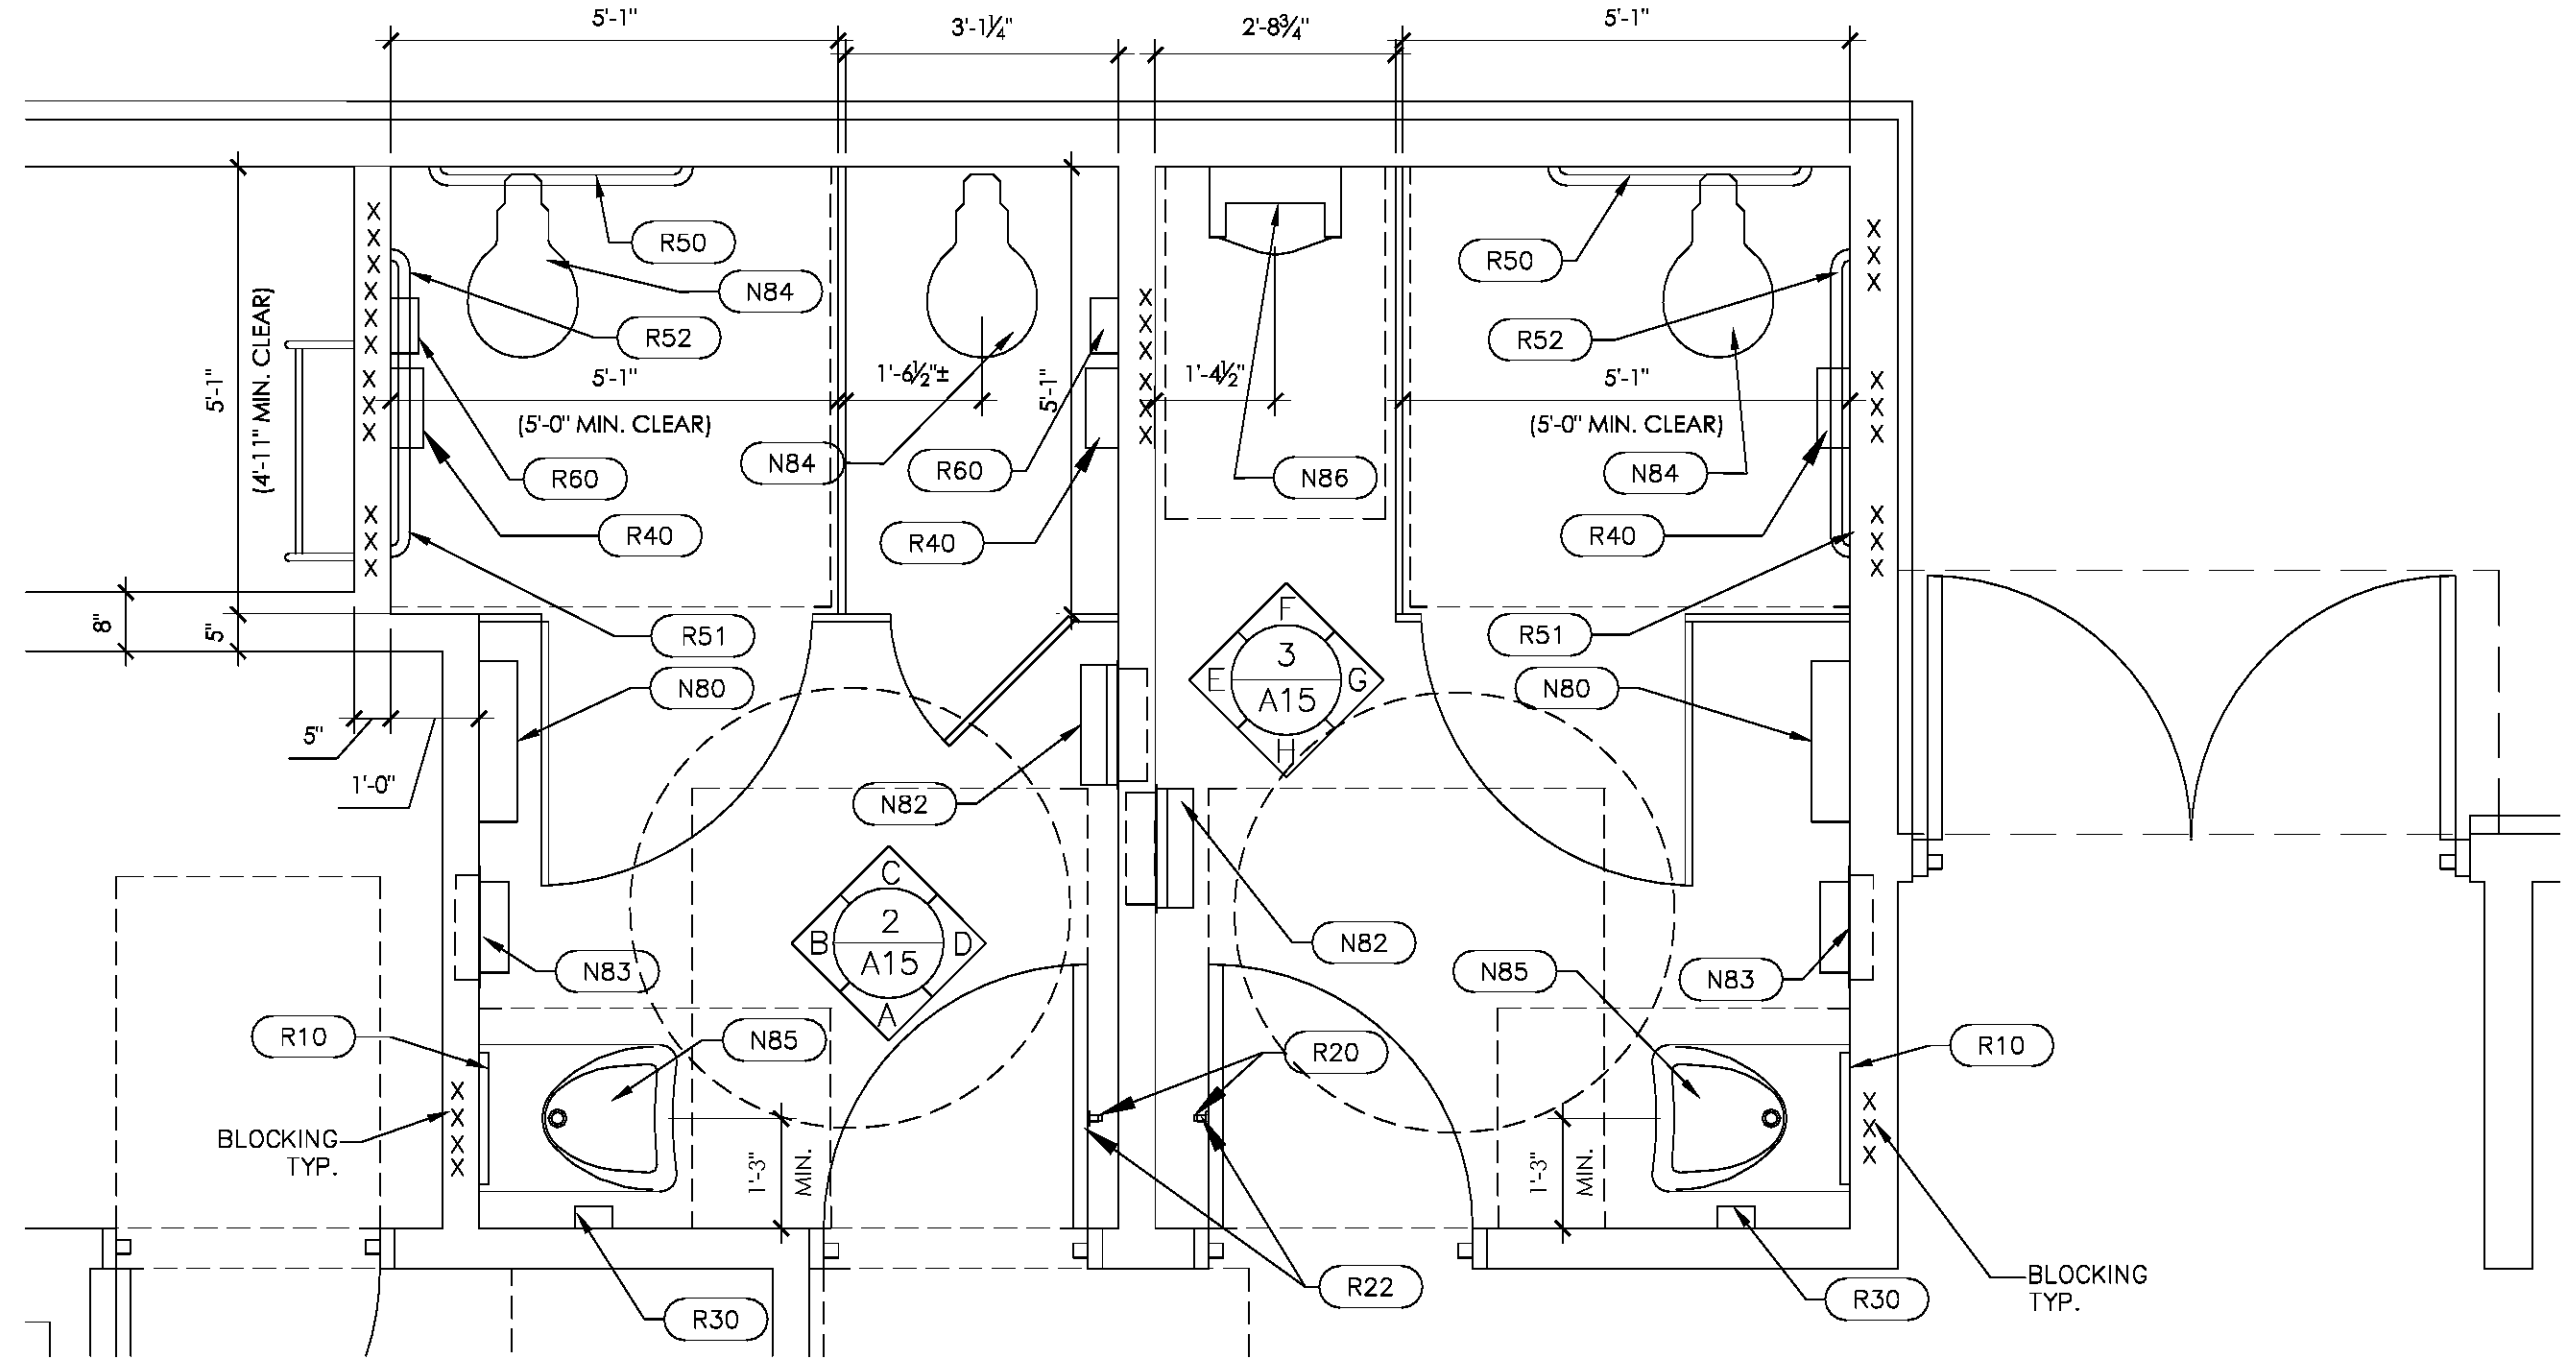


1 A15 ENLARGED RESTROOM PLAN
1/2"=1'-0"

## RESTROOM ACCESSORIES SCHEDULE

| QUANTITY | ITEM | |
|---|---|---|
| 2 | R10 | WALL MOUNTED MIRROR, CHANNEL FRAME 18"x36" - GAMCO C-18x36 |
| 3 | R20 | SURFACE-MOUNTED DOOR BUMPER - BOBRICK B-6877 |
| 6 | R22 | HEAVY DUTY CLOTHES HOOK - BOBRICK B-2116 |
| 2 | R30 | SOAP DISPENSER, SURFACE MOUNT - BOBRICK B-4112 (OPTIONAL) |
| 3 | R40 | ROLL TOILET TISSUE DISPENSER - BOBRICK B-2890 |
| 2 | R50 | GRAB BAR, STRAIGHT, SNAP FLANGE, 36" - GAMCO 150-S x 36" |
| 2 | R51 | GRAB BAR, STRAIGHT, SNAP FLANGE, 42" - GAMCO 150-S x 42" |
| 2 | R52 | GRAB BAR, STRAIGHT, SNAP FLANGE, 18" - GAMCO 150-S x18" |
| 2 | R60 | SANITARY NAPKIN DISPOSAL, SURFACE MOUNT - BOBRICK B-270 |
| 2 | N80 | BABY CHANGING STATION, SURFACE MOUNT - KOALA KARE KB100-00 |
| 2 | N81 | AMERICAN STANDARD 8123F CENTERSET LAVATORY FAUCET |
| 2 | N82 | RECESSED ROLL TOWEL DISPENSER AND WASTE RECEPTACLE, BOBRICK B-43944 |
| 2 | N83 | RECESSED ELECTRIC HAND DRYER, BRUSHED STAINLESS STEEL - XLERATOR XL-SB |
| 3 | N84 | TOILET, FLOOR MOUNT, SENSOR FLUSH - AMERICAN STANDARD 3043.102 |
| 2 | N85 | WALL MOUNT HAND SINK, AMERICAN STANDARD 9141.011 |
| 1 | N86 | URINAL, WALL MOUNT - SUBMIT MODEL TO ARCH. FOR APPROVAL |
| | | ALL RESTROOM ACCESSORIES FURNISHED AND INSTALLED BY CONTRACTOR, EXCEPT SOAP DISPENSER. |

APPROACH "A"
Latch side approach,
Federal Register Vol. 56, No. 144
Pg. 38, Figure C (opposite hand)

APPROACH "B"
Front approach,
Federal Register Vol. 56, No. 144
Pg. 38, Figure A (opposite hand)

APPROACH "C"
Latch side approach,
Federal Register Vol. 56, No. 144
Pg. 38, Figure C

APPROACH "D"
Hinge side approach,
Federal Register Vol. 56, No. 144
Pg. 38, Figure B

FIXTURE CLEARANCE @ SINK
30" X 48"
Federal Register Vol. 56, No. 144
Pg. 44, Figure 32

FIXTURE CLEARANCE @ URINAL 30" X 48"
Federal Register Vol. 56, No. 144
Pg. 44, Section 4.18

FIXTURE CLEARANCE @ TOILET
48" X 56" (36" MIN. @ REAR WALL) Federal Register Vol. 56, No. 144 Pg. 42, Figure 28

## WALL TILE INSTALLATION NOTES

1. INSTALL PINOT GOLD MEUNIER TILE, T-3 FROM TOP OF COVE BASE TO 4'-10" AFF. PROVIDE FOUR ROWS OF THE TILE AS THE CONTROL.
2. INSTALL MARDI GRAS CARNIVAL MOSAIC TILE, M-2 ABOVE FIELD TILE; ONE 12" ROW CUT TO 6" HEIGHT BEFORE INSTALLATION (6" BAND).
3. FLOAT MARDI GRAS CARNIVAL MOSAIC TILE, M-2, TO DEPTH OF PINOT GOLD MEUNIER TILE, T-3.
4. INSTALL FROM THERE TO CEILING PINOT GOLD MEUNIER TILE, T-3.
5. SEAL ALL WALL TILE GROUT JOINTS WITH EPOXY GROUT.

## HAND SINK ASSEMBLY:

HAND SINK
MANUF: AMERICAN STANDARD
MODEL: 9141.011 FAUCET HOLES ON 4" CENTERS
COLOR: WHITE

FAUCET
MANUF: AMERICAN STANDARD
MODEL: 8123F
FACET FINISH: POLISHED CHROME\
TRAP SIZE: 1-1/4"

DRAIN BOOT
MANUF: PLUMBEREX TRAP GEAR
MODEL: 632W

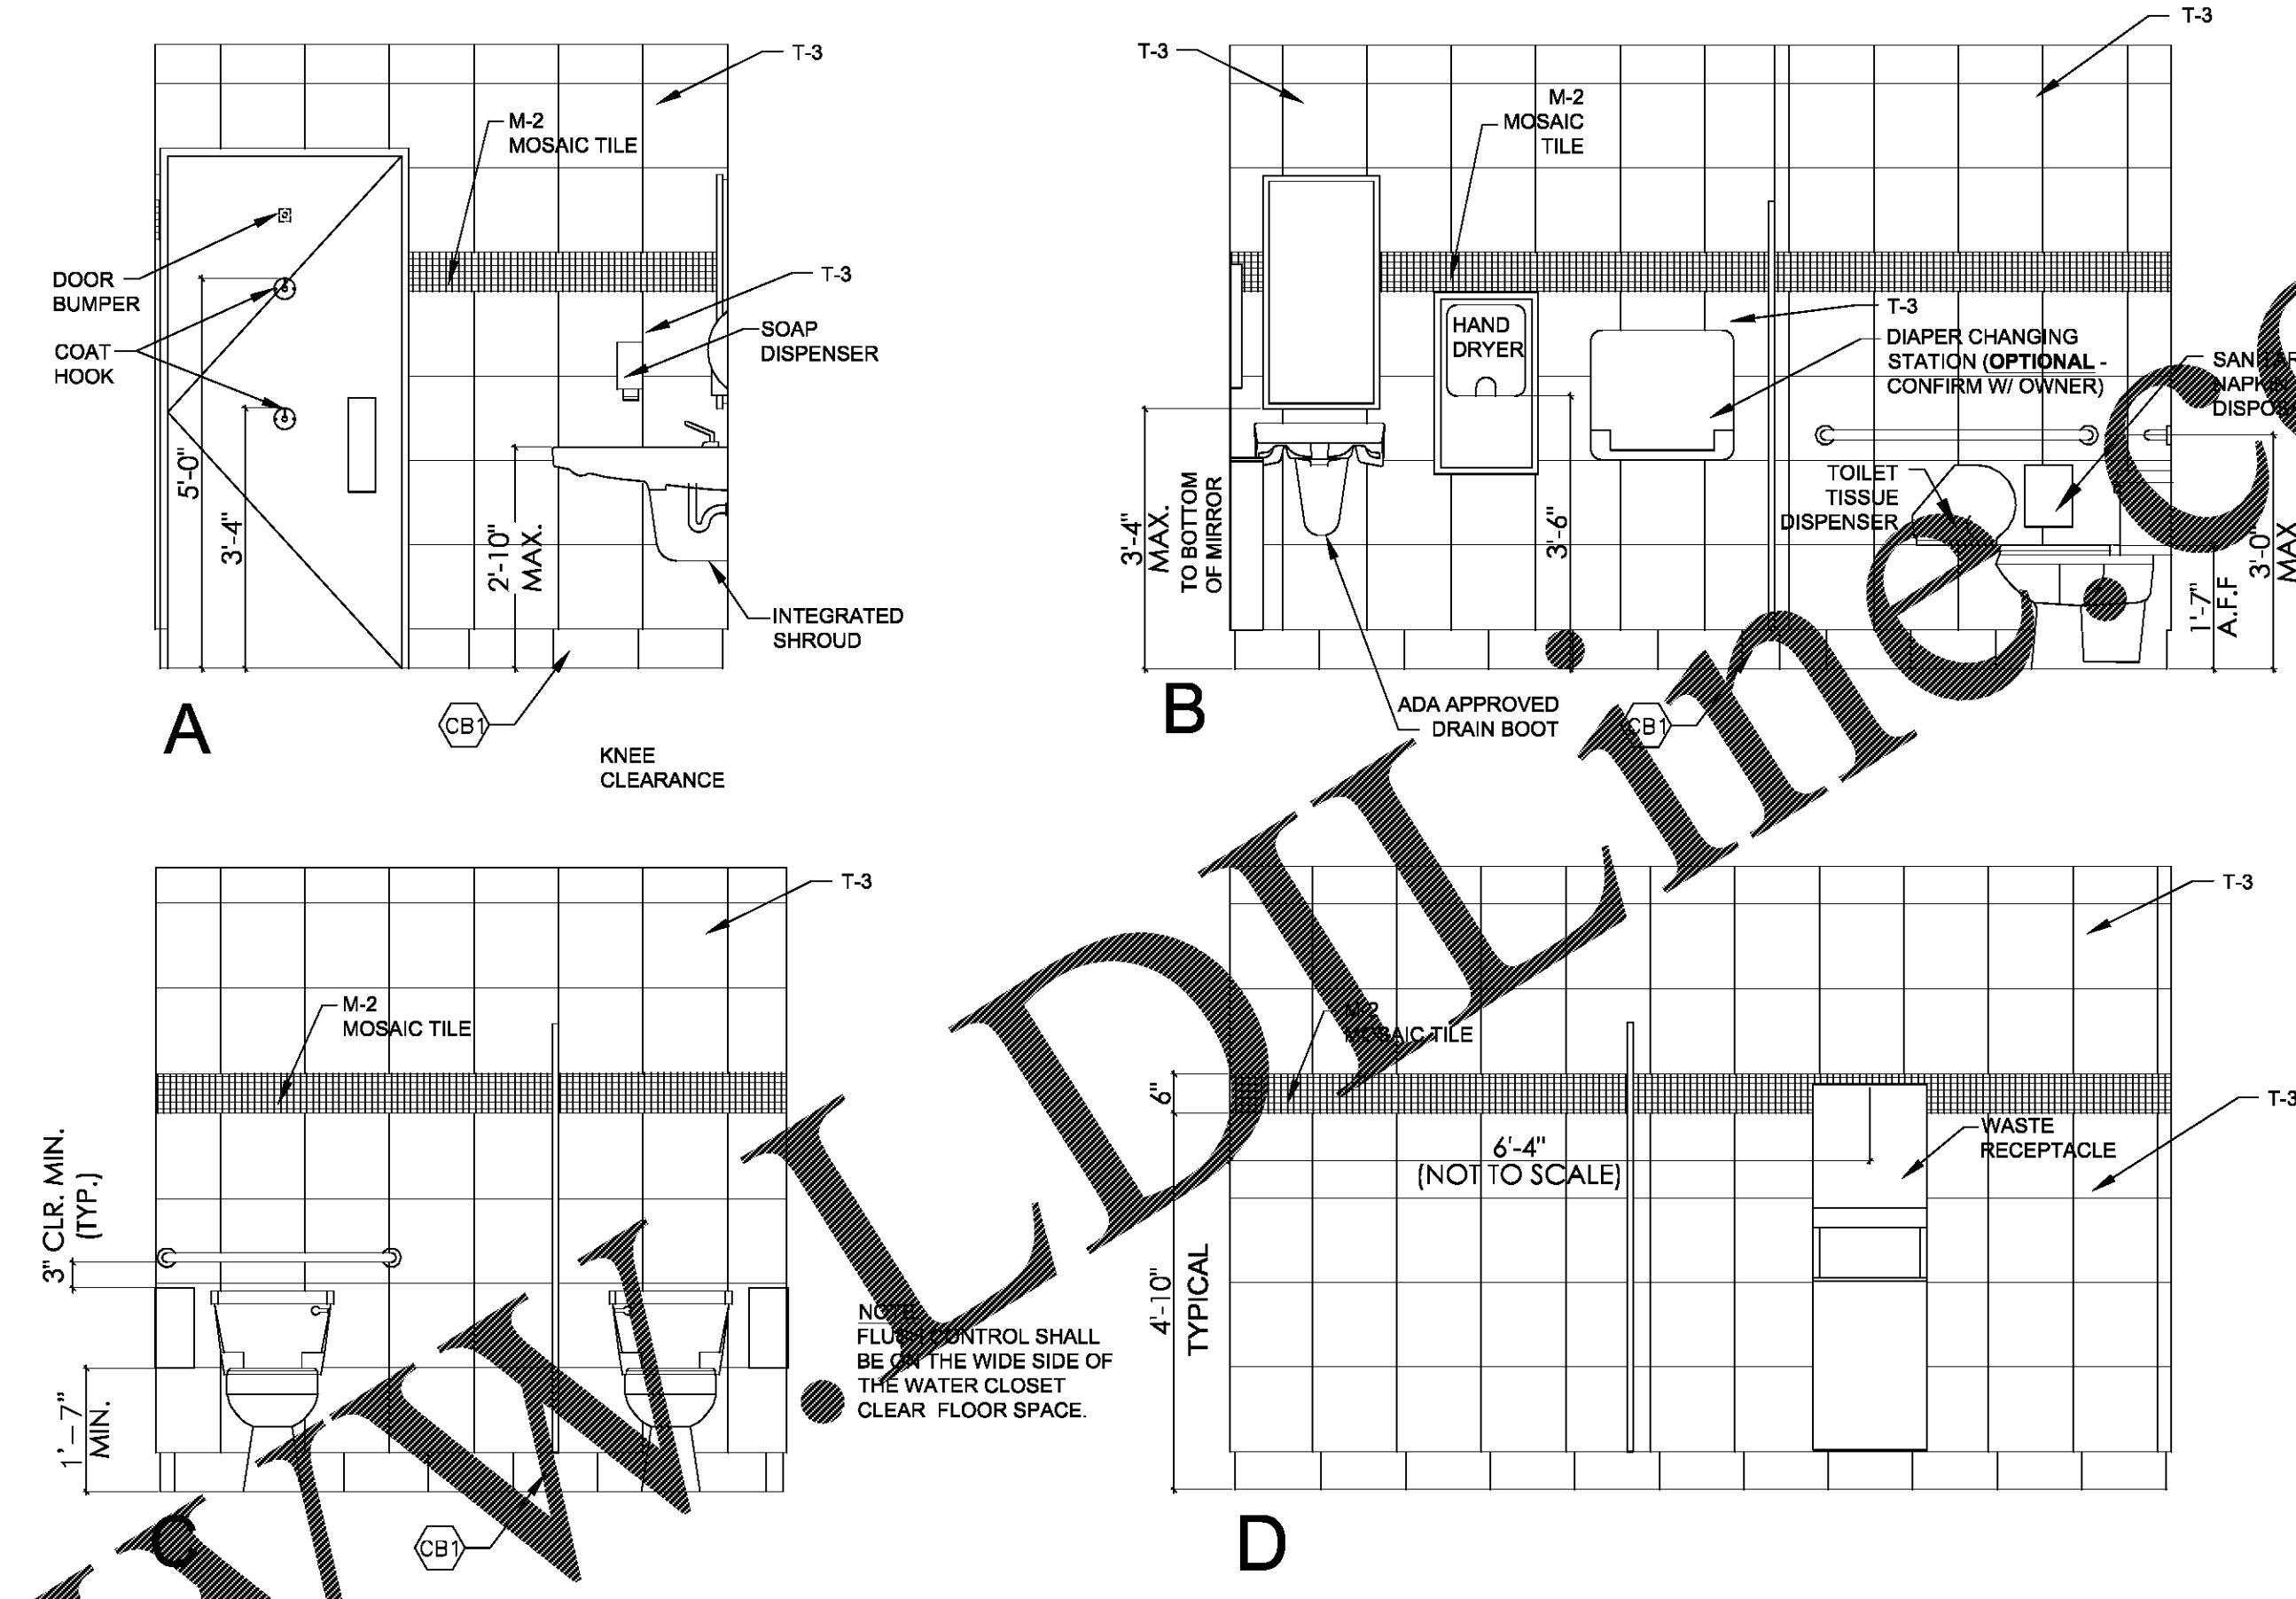


2 A15 ELEVATIONS @ WOMEN'S RESTROOM
1/2"=1'-0"

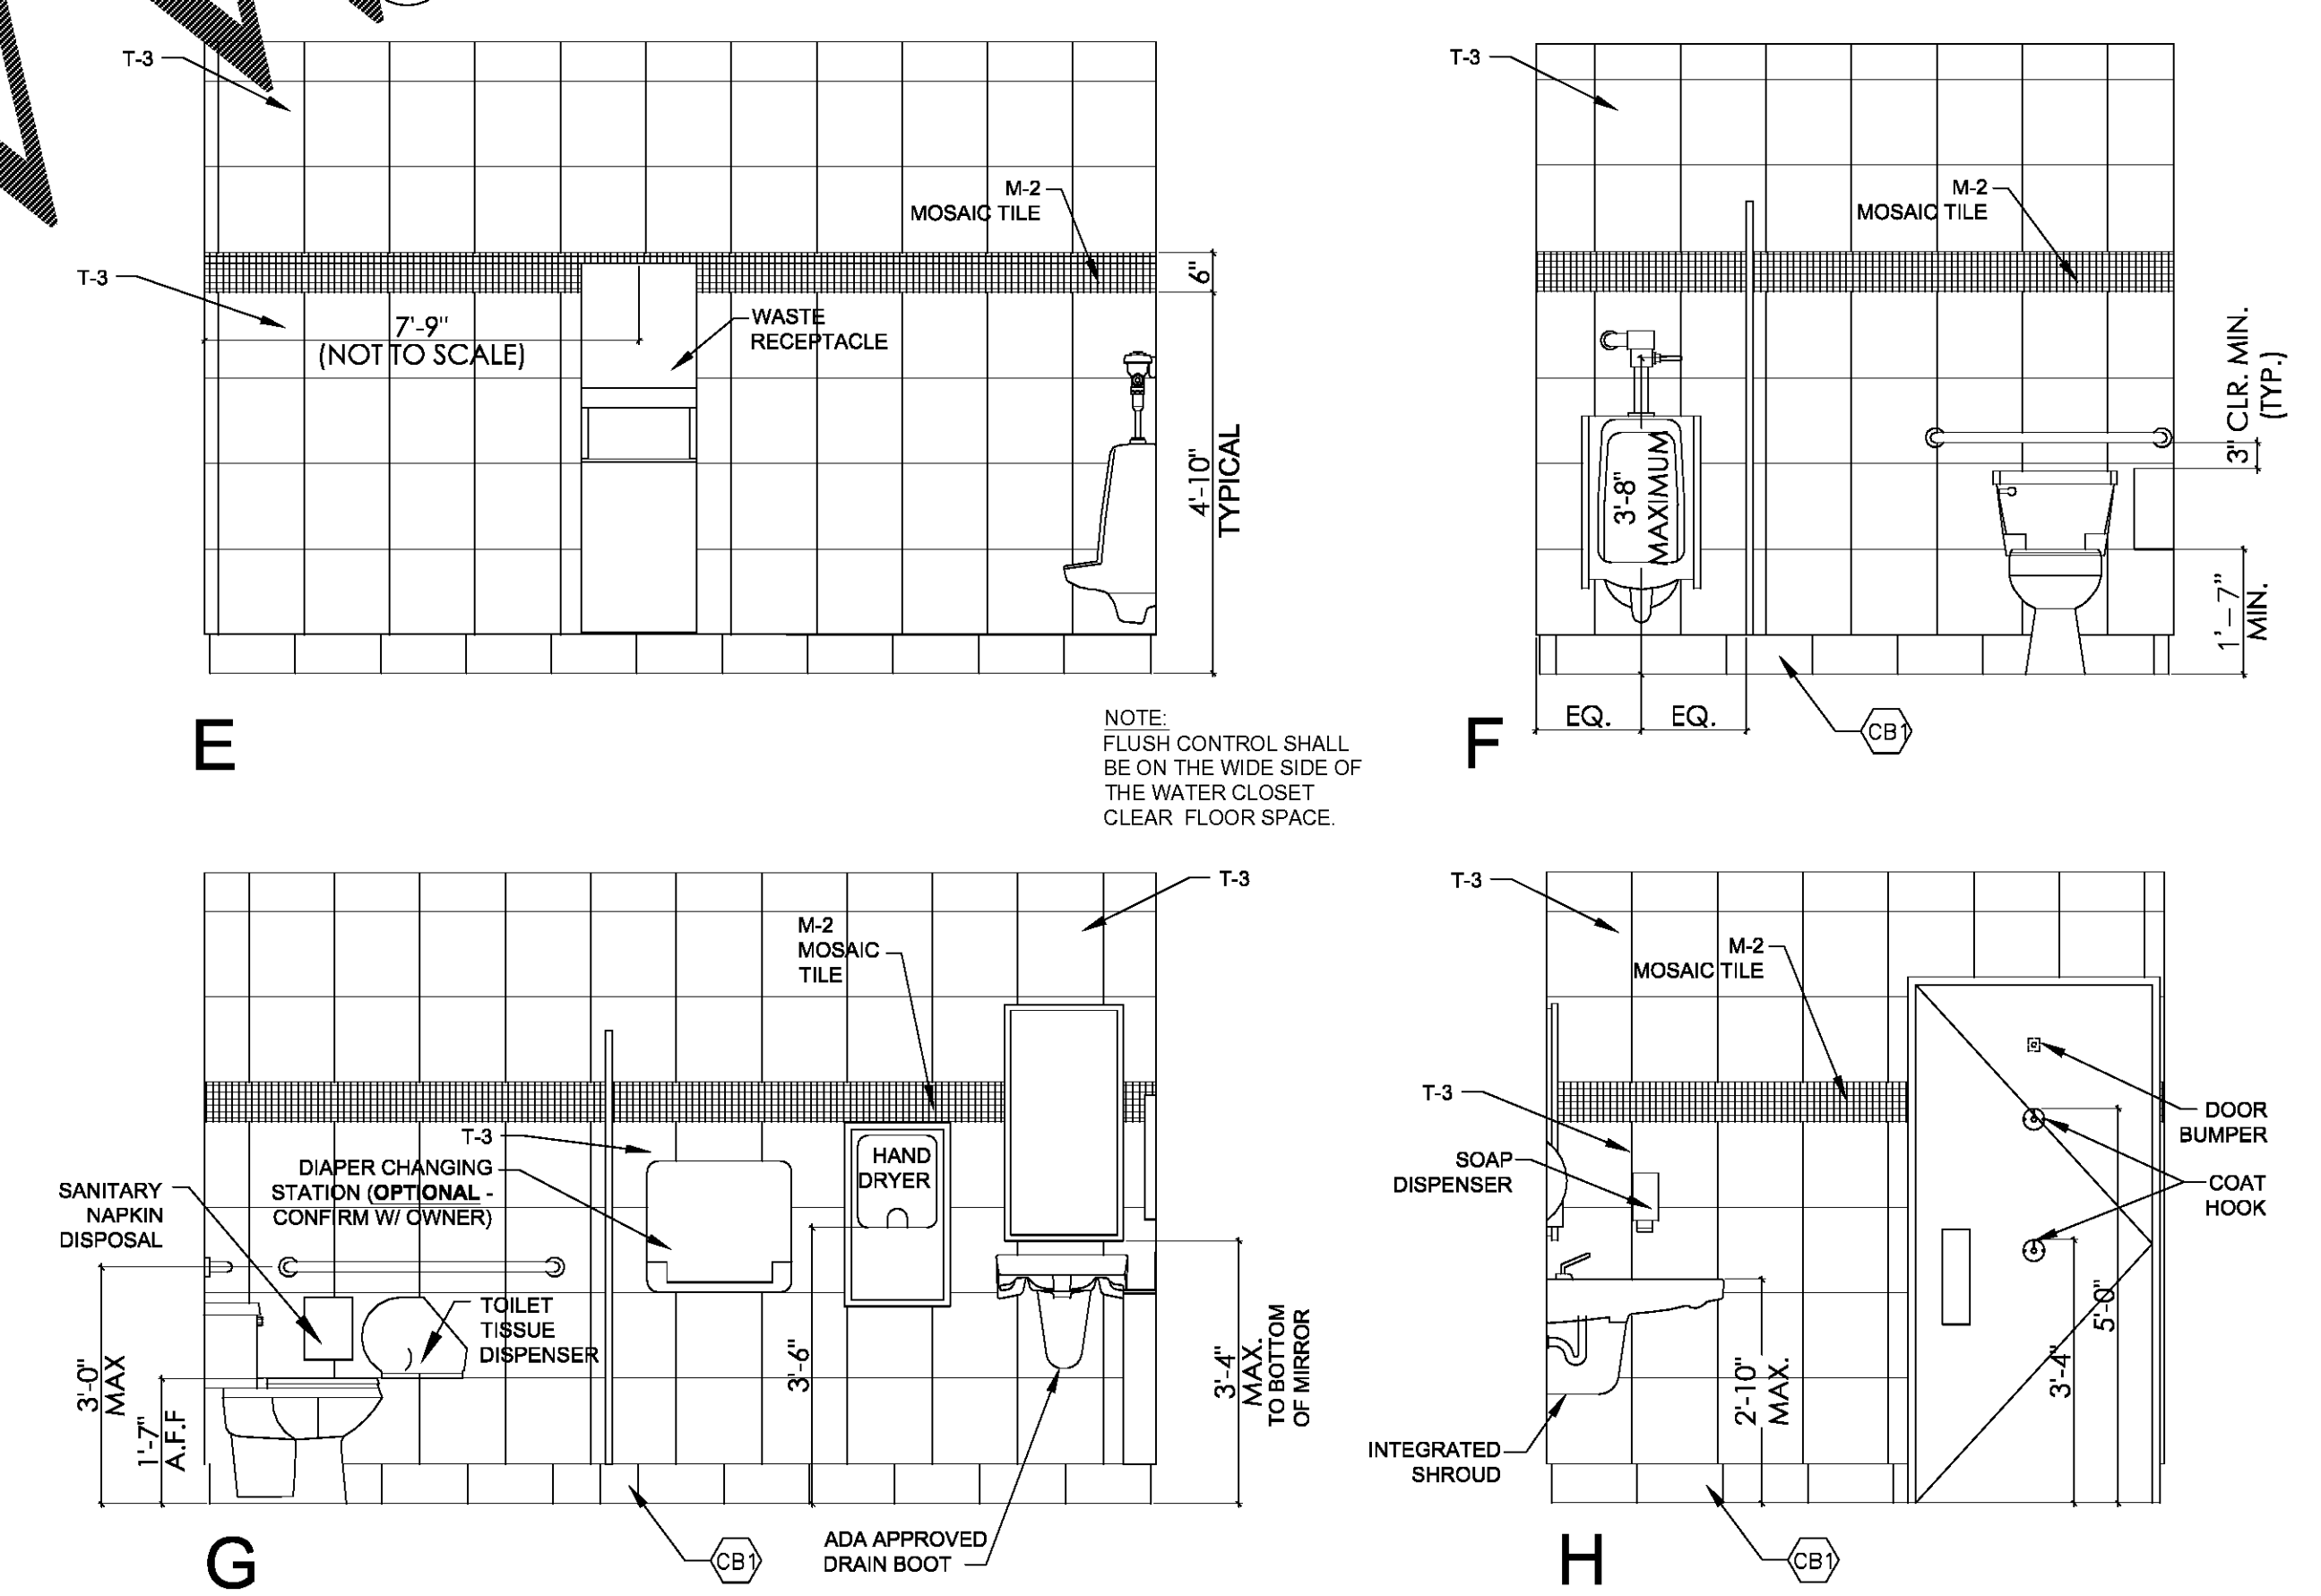


3 A15 ELEVATIONS @ MEN'S RESTROOM
1/2"=1'-0"

**ALL DIMENSIONS THIS SHEET ARE FROM FINISHES**

## SPECIFICATIONS:

DIVISION 10: SPECIALTIES
SECTION 10A: TOILET ACCESSORIES
GENERAL PROVISIONS

1. SCOPE: INSTALL TOILET PARTITIONS WHERE APPLICABLE, TOILET ACCESSORIES, AND RELATED HARDWARE AS SHOWN ON PLANS OR INSTALLATION DRAWINGS.
2. SUBMISSIONS: PROVIDE INSTALLATION DRAWINGS TO OWNER'S REPRESENTATIVE SHOWING THE SIZE AND LOCATION OF EACH COMPONENT AND ROUGH OPENING SIZES AND MOUNTING HEIGHTS. LABEL ALL COMPONENTS TO CORRESPOND TO INSTRUCTIONS FOR EASE OF INSTALLATION.

MATERIALS

1. DOORS FOR TOILET COMPARTMENTS WHERE APPLICABLE WITH STUD WALL PARTITIONS SHALL BE 3/4" X 58" HIGH TOILET STALL DOORS WITH STANDARD HINGES #502 CATCH SLIDE SURFACE STRIKE #5140 FOR OUTSWINGING DOORS, AND #5260 SURFACE STRIKE FOR IN-SWINGING DOORS, COAT HOOK WITH RUBBER BUMPER AT 48" O.C.
2. STALL DOOR HINGE JAMB: 3/4" X 1-1/4" X 6'-0" MILL FINISH ALUMINUM TUBE HINGE JAMB POST FOR TOILET STALL DOORS. PRE-DRILL FOR #12 SCREWS @ 6" O.C.
3. PANELIZED TOILET COMPARTMENTS & DOORS (WHEN SHOWN) SHALL BE MARLITE FLOOR-MOUNTED, OVERHEAD-BRACED TOILET PARTITIONS AND OR FLOOR-MOUNTED, CEILING-BRACED URINAL SCREEN BY MARLITE WITH STAINLESS STEEL PLASTER SHOE COVERS. FINISH 927 SILKSTONE (GRAY), MOLD LAMINATE. DOORS TO HAVE COAT HOOK WITH RUBBER BUMPER.
4. ACCESSORIES REFER TO DRAWINGS.

PERFORMANCE

1. INSTALL PARTITIONS, ACCESSORIES, AND HARDWARE IN ACCORDANCE WITH MANUFACTURER'S RECOMMENDATIONS AND INSTALLATION DRAWINGS.

## ACCESSIBILITY NOTES: ADA/ANSI A117.1

1. THE INTERNATIONAL SYMBOL OF ACCESSIBILITY SIGN SHALL BE DISPLAYED AT ALL ACCESSIBLE RESTROOM FACILITIES AND AT ACCESSIBLE BUILDING ENTRANCES UNLESS ALL ENTRANCES ARE ACCESSIBLE. INACCESSIBLE ENTRANCES SHALL HAVE DIRECTIONAL SIGNS INDICATING THE ROUTE TO THE NEAREST ACCESSIBLE ENTRANCE.
2. RECEPTACLES ON WALLS SHALL BE MOUNTED NO LESS THAN 15" ABOVE THE FLOOR. EXCEPTION: HEIGHT LIMITATIONS DO NOT APPLY WHERE THE USE OF SPECIAL EQUIPMENT DICTATES OTHERWISE OR WHERE ELECTRICAL RECEPTACLES ARE NOT NORMALLY INTENDED FOR USE BY BUILDING OCCUPANTS.
3. WHERE EMERGENCY WARNING SYSTEMS ARE PROVIDED, THEY SHALL INCLUDE BOTH AUDIBLE AND VISUAL ALARMS. THE VISUAL ALARMS SHALL BE LOCATED THROUGHOUT, INCLUDING RESTROOMS, AND PLACED 80" ABOVE THE FLOOR OR 6" BELOW CEILING, WHICHEVER IS LOWER.
4. DOORS TO ALL ACCESSIBLE SPACES SHALL HAVE ACCESSIBLE HARDWARE (i.e. LEVER-OPERATED, PUSH-TYPE, U-SHAPED) MOUNTED NO HIGHER THAN 48" ABOVE THE FLOOR.
5. FLOOR SURFACES SHALL BE STABLE, FIRM, AND SLIP-RESISTANT. CHANGES IN LEVEL BETWEEN 0.25" AND 0.5" SHALL BE BEVELED WITH A SLOPE NO GREATER THAN 1:2". CHANGES IN LEVEL GREATER THAN 0.5" REQUIRE RAMPS. CARPET PILE THICKNESS SHALL BE 0.5" MAX. GRATINGS IN FLOOR SHALL HAVE SPACES NO GREATER THAN 0.5" WIDE IN ONE DIRECTION. DOORWAY THRESHOLDS SHALL NOT EXCEED 0.5" IN HEIGHT.
6. GRAB BARS REQUIRED FOR ACCESSIBILITY SHALL BE 1.25"-1.50" IN DIAMETER WITH 1.5" CLEAR SPACE BETWEEN THE BAR AND THE WALL.
7. ACCESSIBLE WATER CLOSETS SHALL BE 17"-19" FROM FLOOR TO THE TOP OF THE SEAT. GRAB BARS SHALL BE 36" LONG MINIMUM WHEN LOCATED BEHIND WATER CLOSET AND 42" MINIMUM WHEN LOCATED ALONG SIDE OF WATER CLOSET, AND SHALL BE MOUNTED 33"-36" ABOVE THE FLOOR.
8. ACCESSIBLE URINALS SHALL BE STALL-TYPE OR WALL HUNG WITH ELONGATED RIMS AT A MAXIMUM OF 17" ABOVE THE FLOOR.
9. ACCESSIBLE LAVATORIES SHALL BE MOUNTED WITH THE RIM NO HIGHER THAN 34" ABOVE THE FLOOR AND A CLEARANCE OF AT LEAST 29" ABOVE THE FLOOR TO THE BOTTOM OF THE APRON.
10. ACCESSIBLE SINKS SHALL BE MOUNTED WITH THE RIM NO HIGHER THAN 34" ABOVE THE FLOOR AND A CLEARANCE OF AT LEAST 27" HIGH, 30" WIDE, AND 19" DEEP UNDERNEATH SINK. THE SINK DEPTH SHALL BE 6.5" MAXIMUM.
11. HOT WATER AND DRAIN PIPES UNDER ACCESSIBLE LAVATORIES AND SINKS SHALL BE INSULATED OR OTHERWISE CONFIGURED TO PROTECT AGAINST CONTACT. THERE SHALL BE NO SHARP OR ABRASIVE SURFACES UNDER
12. ACCESSIBLE LAVATORIES AND SINKS. ACCESSIBLE LAVATORIES AND SINKS SHALL HAVE ACCESSIBLE FAUCETS (i.e. LEVER-OPERATED, PUSH-TYPE, ELECTRONICALLY CONTROLLED.)
13. WHERE MIRRORS ARE PROVIDED IN RESTROOM, AT LEAST ONE SHALL BE PROVIDED WITH THE BOTTOM EDGE OF THE REFLECTIVE SURFACE NO HIGHER THAN 40" ABOVE THE FLOOR.

Order Plans @ WWW.LDILine.com

POPEYES
400 PERIMETER CENTER TERRACE
SUITE 1000
ATLANTA, GA 30346
404-459-4450

STATE OF ALABAMA REGISTERED ARCHITECT 4152 Erik N. Hendon
10.30.18

hendon + huckestein architects, PC
architecture . planning . interior design
2126 Morris Avenue Birmingham, AL 35203
Phone (205) 322-1751
Fax (205) 322-1778
email info@hplusha.com
www.hplusha.com

DRAWN BY: DB
CHECKED BY: MRW, EH
DATE: 10.30.2018
H+HA PROJECT #:18064.14

# PREMIER CAJUN KINGS, LLC - POPEYES
Near 431 Main St,
Shorter, AL 36075
LOUISIANA KITCHEN PLK DESIGN STANDARDS
PLKI 1846-DL PROTOTYPE: 46 SEATS / DUAL-LINE PRODUCTION

LOUISIANA KITCHEN
POPEYES

REVISIONS:
PERMIT/BID SET 10.30.18

# A15
ENLARGED RESTROOM PLAN & ELEVATIONS

DATE: 10/18/2018
CHECKED: MW