FOODSERVICE EQUIPMENT SCHEDULE

NO.	(E) - IF EXIST., LEAVE IN PLACE	QTY	DESCRIPTION	MANUFACTURER	MODEL	NO.	ELECTRICAL								WATER		WASTE		GAS		REMARKS	NO.
							R.I.H.	FLAMPS	KW	HP	VOLTS	PHASE	DIRECT	PLUG	COLD	HOT	DIRECT	INDIRECT	SIZE	MBTUH		
1		1	INSECT FAN	MARS	STD48-1U	1	ABV	5.1		1/2	120	1	X								MICRO-SWITCH BY F.S.E.C., INSTALLED BY E.C.	1
2	8		SHELVING UNIT	BY OWNER	----	2																2
3	2		DUNNAGE RACK	BY OWNER	----	3																3
4		1	3-COMPARTMENT SINK	ATLANTA FABRICATORS	3B24-2D24-14	4									(2)1/2"	(2)1/2"	FS				24"x26-1/2"x14"D SINKS; (2)T&S B-0231 FAUCETS; (3) LEVER WASTES	4
5		1	SHELF, WALL-MOUNTED WITH POT RACK	ATLANTA FABRICATORS	10WSPR12	5																5
6		1	FREEZER, 3-SECTION	MASTERBILT	MBF72-S	6	24"	12.0		1	120	1		X							NEMA 5-20P	6
7		1	REFRIGERATOR, 3-SECTION	MASTERBILT	MBR72-S	7	24"	10.0		3/5	120	1		X				3/4"			NEMA 5-15P	7
8		1	EXHAUST HOOD	CAPTIVEAIRE	ND-PSP	8	ABV	15.0			120	1	X								SEE CAPTIVEAIRE BIDS-OF-DESIGN SHEETS K300-K302 FOR MECHANICAL DATA; FANS & DUCTWORK BY MECHANICAL CONTRACTOR	8
9		1	FIRE SUPPRESSION SYSTEM	ANSUL	R102	9																9
10		1	RANGE, 8-BURNER	IMPERIAL	IR8-C-XB	10	UDS	6.6			120	1		X					3/4"	286	GAS PRESSURE REGULATOR/SHUT-OFF; NEMA 5-15P	10
11		1	CONVECTION OVEN	SOUTHBEND	BGS/12SC	11	UDS	7.9		1/2	120	1		X					3/4"	54	GAS PRESSURE REGULATOR/SHUT-OFF; NEMA 5-15P	11
12	1		CONVECTION STEAMER W/STAND - FUTURE	ACCUTEMP	N6	12	UDS	1.0			120	1		X			3"	FS	1/2"	60	FUTURE GAS PRESSURE REGULATOR/SHUT-OFF; NEMA 5-15P	12
13		1	REFRIGERATED SANDWICH UNIT	BEVERAGE AIR	SPE48-12	13	18"	5.0		1/4	120	1		X							NEMA 5-15P	13
14		1	GRIDDLE, 48"	GARLAND US RANGE	GTGG48-GT48M	14	18"	1.0			120	1		X					3/4"	112	GAS PRESSURE REGULATOR/SHUT-OFF; NEMA 5-15P	14
15		1	EQUIPMENT STAND, REFRIGERATOR	CONTINENTAL	DL48G	15	UDS	5.7		1/5	120	1		X							NEMA 5-15P	15
16		2	FRYER	ADCRAFT	BDGF-120	16													2@1/2"	2@90	SEPARATE GAS CONNECTIONS	16
17		1	FREEZER, 1-SECTION	MASTERBILT	MBF23-S	17	UDS	8.5		3/5	120	1		X							NEMA 5-15P	17
18	1		SERVING COUNTER	BY G.C.	CASEWORK	18	FLR					1	X					FS			SEE ARCHITECTURAL DRAWINGS; COUNTER-MOUNTED RECEPTACLES FOR COUNTER TOP EQUIPMENT.	18
19		3	HEATED MERCHANDISER	HATCO	HZMH-42	19	CNTR	12.1	1.45		120	1		X							NEMA 5-20P	19
20	1		CASH REGISTER/P.O.S	BY OWNER	----	20	CNTR	5.0			120	1		X							NEMA 5-15P; E.C. TO VERIFY DATA LINE WITH OWNER.	20
21	1		BEVERAGE DISPENSER W/ICE BIN, 8-VALVE, 24"W	CORNELIUS BY OWNER	CB2323	21	CNTR	3.0			120	1		X				FD			COLD WATER PROVIDED IN BEVERAGE LINE TRUNK; NEMA 5-15P	21
22	1		BEVERAGE POST MIX SYSTEM	BY OWNER	CUSTOM	22	24"	10.0			120	1	X					FD			NEMA 5-15P	22
22A	1		BEVERAGE LINE UNDER GROUND CONDUIT	BY G.C.		22A															6" DIA. UNDERGROUND ELECTRICAL CONDUIT W/450 SWEEPS BY G.C. VERIFY SIZE W/BEVERAGE EQMT. VENDOR	22A
23	1		FOOD WARMER, ROUND, 7-QT.	VOLLRATH - BY OWNER	72017	23	CNTR		0.8		120	1		X								23
24		1	UTILITY DISTRIBUTION SYSTEM	CAPTIVEAIRE	UDS-I	24	ABV	50			120/208	3	X		3/4"	3/4"					SEE CAPTIVEAIRE BIDS-OF-DESIGN SHEET K285 FOR MECHANICAL DATA; FANS & DUCTWORK BY MECHANICAL CONTRACTOR	24
25		2	HAND SINK W/SPLASH GUARDS	ATLANTA FABRICATORS	SHS-1-2SG	25									1/2"	1/2"		1-1/2"				25
26	1		DUAL HOT FOOD WARMER	BENCHMARKUSA - BY OWNER	51072P	26	CNTR	10.0	1.2		120										NEMA 5-15P	26
27		-	-SPARE NUMBER-			27																27
28		1	ICE MAKER W/ICE BIN	MANITOWAC	ID-0522/B570	28	64"	14.4			120	1				1/2"		FS			NEMA 5-20P	28
28A		1	WATER FILTER SYSTEM	MANITOWAC	AR-1000	28A									1/2"							28A
29		1	PREP TABLE W/SINK	ATLANTA FABRICATORS	6SUB30-14/141812 SINK	29									1/2"	1/2"		FS			14"x18"x12"D SINK; T&S B-0331 FAUCET	29
30		1	EXHAUST HOOD	CAPTIVEAIRE	ND-PSP	30	ABV	15.0			120	1	X								SEE CAPTIVEAIRE BIDS-OF-DESIGN SHEETS K300-K302 FOR MECHANICAL DATA; FANS & DUCTWORK BY MECHANICAL CONTRACTOR	30
31		1	FIRE SUPPRESSION SYSTEM	ANSUL	R102	31																31
32		1	COLD FOOD MERCHANDISER, AIR CURTAIN	TITAN	TIK036S	32		16.0			120	1		X							NEMA 5-20P	32
33		-	-SPARE NUMBER-			33																33
34		1	HEATED/PROOF CABINET	METRO	C539-CFC-U	34	24"	16.0	2.0		120	1		X							NEMA 5-20P	34

Order Plans @ WWW.BDLine.com



1 K101 TABLE EDGE DETAILS
NOT TO SCALE

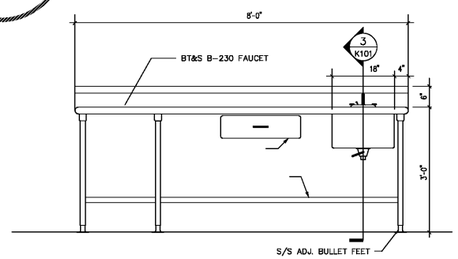

2 K101 WORK TABLE DETAIL
3/4" = 1' - 0" ITEM #93, 1 EA.



3 K101 SECTION
3/4" = 1' - 0"

adwarchitects
environmentsforlife
architecture planning interiors
2815 COLISEUM CENTRE DRIVE
SUITE 500
CHARLOTTE, NORTH CAROLINA 28217
P704.379.1919
F704.379.1920
www.adwarchitects.com

HERBIN DESIGN
FOOD SERVICE CONSULTANT
7565 DORN CIRCLE
CHARLOTTE, NC 28212
704-779-0786 PH
www.herbindesign.com

FOR REFERENCE ONLY

RICHMOND COMMUNITY COLLEGE

SCO #16-15889-02A

RICHMOND
COMMUNITY
COLLEGE

LINDSEY-PETRIS
CAFETERIA / DINING
ADDITION VOL.1

BID DOCUMENTS

FOOD SERVICE
DETAILS &
ELEVATIONS

DATE: 04.05.2019
PROJECT NO: 16063

REVISIONS
NO: DATE: DESCRIPTION:

THIS DRAWING IS THE PROPERTY OF ADW ARCHITECTS P.A. AND SHALL NOT BE REPRODUCED OR COPIED IN WHOLE OR PART. IT SHALL NOT BE USED ON ANY OTHER PROJECT OR GIVEN TO ANY OTHER COMPANY OR AGENCY WITHOUT THE CONSENT IF ADW ARCHITECTS, P.A.

SHEET NUMBER
K101