CEILING PLAN LEGEND

L1	6" RECESSED LED DOWNLIGHT		GWB CEILING
L2	DECORATIVE PENDANT LIGHT, BY OWNER		MECHANICAL RETURN/ EXHAUST - RECESSED SQUARE
L3	6" CYLINDER LIGHTS HUNG FROM STRUCTURE		MECHANICAL SUPPLY- RECESSED SQUARE
L4	6" RECESSED LED DOWNLIGHT - WET LOCATION		EMERGENCY WALL PACK
L5	DECORATIVE PENDANT		EXIT SIGN
	CEILING FAN BY OWNER	9'-0"	CEILING HEIGHT

REFLECTED CEILING PLAN NOTES

1. SEE ELECTRICAL PLAN FOR CIRCUITING AND SWITCHING.
2. SEE MECHANICAL PLAN FOR DUCTING.
3. ALL CEILING HEIGHTS AS SHOWN ON DRAWINGS.
4. SEE FINISH SCHEDULE FOR CEILING SPECIFICATIONS.
5. FIXTURES MUST PROVIDE A TOTAL 50 FOOT CANDLES OF LIGHT AT FOOD PREP AND UTENSIL WASH AREAS. 10 FOOT CANDLES OF LIGHT MUST BE PROVIDED IN ALL OTHER WORK AREAS INCLUDING STORAGE ROOMS.
6. GC TO PROVIDE 2'X2' ACCESS PANELS IN HARD CEILING AS NECESSARY; APPROVE LOCATIONS WITH OWNER PRIOR TO INSTALLATION.
7. NO PARTING SUBSTITUTIONS WITHOUT ARCHITECTS WRITTEN APPROVAL.
8. CONTACT ARCHITECT FOR ANY QUESTION RE: MOUNTING HEIGHTS.
9. JASON VALLOR - V3 LIGHTING - 704.620.4554 - JASON@V3LIGHTING.COM

Order Plans @ WWW.LDILife.com

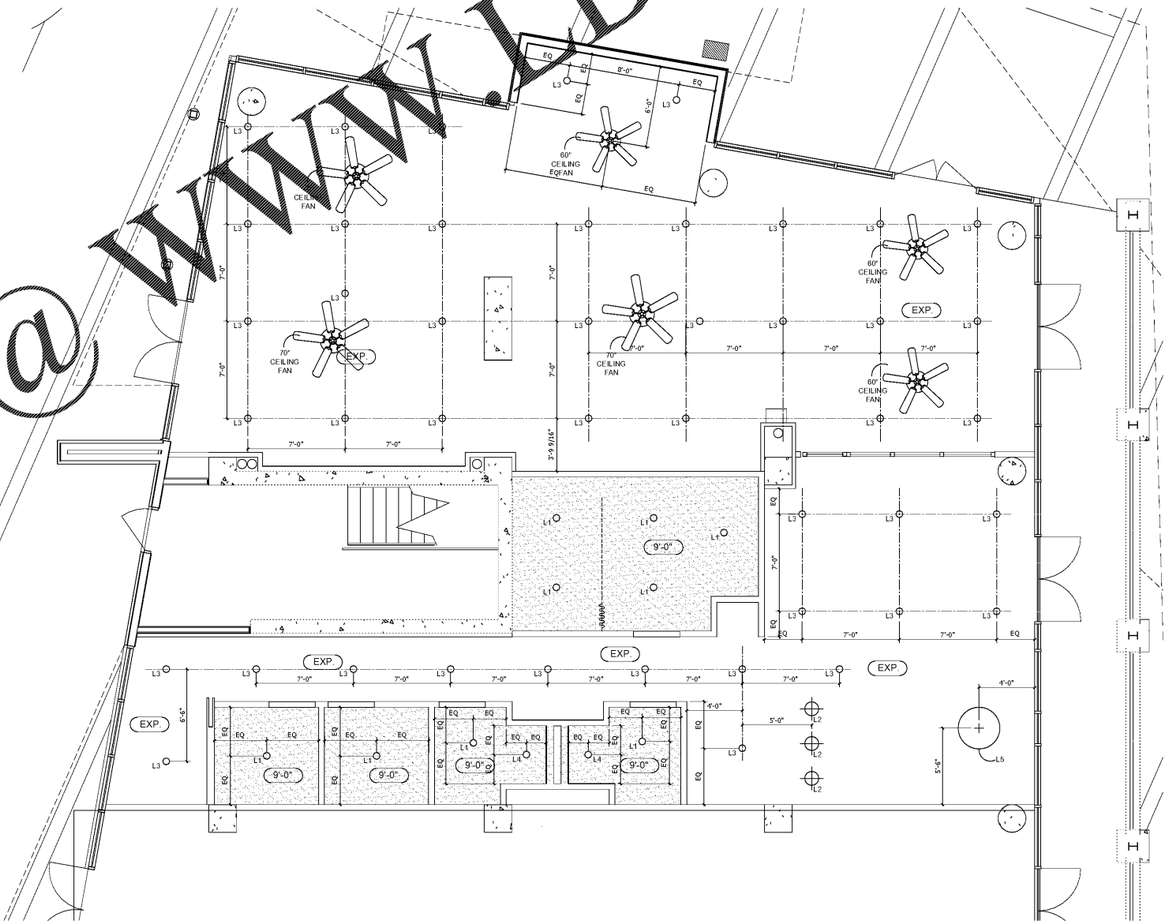

01 REFLECTED CEILING PLAN

scale: 1/4"=1'-0"

ODa
overcash demmitt
2010 south tryon st, suite 1a
charlotte north carolina 28203
office.704.332.1615
web.www.odarch.com

STEPHEN F. OVERCASH REGISTERED ARCHITECT 3878 NORTH CAROLINA CHARLOTTE, N.C.

OVERCASH DEMMITT ARCHITECTS PLLC CERT. NO. 52369 NORTH CAROLINA CHARLOTTE, N.C.

06.28.2019

Hustle House

ODA Project No. 183324

Charlotte, NC

FOR CONSTRUCTION

06.28.2019

REVISIONS		
No.	Description	Date
	FOR CONSTRUCTION	06.28.19

REFLECTED CEILING PLAN

A-102

Copyright 2017 Overcash Demmitt Architects