


PROJECT BENCHMARKS	
TBM #1	SANITARY MANHOLE RIM WEST OF PROJECT AREA ELEV. 856.87
TBM #2	SANITARY MANHOLE RIM SOUTH OF PROJECT AREA ELEV. 859.98

LEGEND

- - PROPERTY LINE
- LD - LIMITS OF DISTURBANCE
- IPB - FILTER BAG
- EE - EROSION EEL
- - APPROXIMATE SAWCUT LIMITS
- - TREE PROTECTION FENCE
- > - DRAINAGE PATTERN
- ⊕ - TEMPORARY BENCHMARK (TBM)
- CE - CONSTRUCTION EXIT (ON PAVEMENT)
- ▨ - SOD/GROUNDCOVER (REFER TO PLANTING PLAN)

Scale: 0 20 20
North Arrow: N

- SWPPP IMPLEMENTATION SEQUENCE**
- NOTE: SWPPP IMPLEMENTATION AND INSTALLATION OF THE FOLLOWING AREAS: TRAILER, PARKING, LAY DOWN, PORTA-POTTY, WHEEL WASH, CONCRETE WASHOUT, MASON'S AREA, FUEL AND MATERIAL STORAGE AREAS/CONTAINERS, SOLID WASTE CONTAINERS, ETC., IMMEDIATELY DENOTE THEM ON THE SITE MAPS AND NOTE ANY CHANGES IN LOCATION AS THEY OCCUR THROUGHOUT THE CONSTRUCTION PROCESS. IN ADDITION, NOTE ALL AREAS WHERE FILL IS IMPORTED FROM OR SOIL IS EXPORTED TO ON THE SITE MAPS.
- NOTE: DOWN SLOPE PROTECTIVE MEASURES MUST ALWAYS BE IN PLACE BEFORE SOIL IS DISTURBED. ACTIVITIES ARE PRESENTED IN THE ORDER OR SEQUENCE IN WHICH THEY ARE REQUIRED TO BE COMPLETED.
1. STAKE/FLAG THE LOD (WHERE STAKING IS NOT POSSIBLE/PRACTICAL, THE LOD MUST BE CONSPICUOUSLY AND PROMINENTLY MARKED TO DENOTE THE BOUNDARY). LOD MUST REMAIN CONSPICUOUSLY MARKED THROUGHOUT THE ENTIRE CONSTRUCTION PROJECT.
 2. INSTALL PERIMETER SEDIMENT CONTROL BMP'S AND INLET PROTECTION AS SHOWN ON THE DEMOLITION AND TRAFFIC CONTROL PLAN.
 3. ESTABLISH CONSTRUCTION EXIT ON PAVEMENT.
 4. INSTALL PERIMETER SEDIMENT CONTROL BMP'S AND INLET PROTECTION AS SHOWN ON THE SITE MAP AS CONSTRUCTION PROGRESS DICTATES. BMP'S SHALL BE INSTALLED PRIOR TO BEGINNING EARTH DISTURBING ACTIVITIES IN UPGRADING AREAS. DISTURB ONLY THE MINIMUM AREA NECESSARY TO INSTALL BMP'S.
 5. PREPARE TEMPORARY PARKING AND STORAGE AREA.
 6. BEGIN DEMOLITION ACTIVITIES (PHASE ACTIVITIES TO THE EXTENT PRACTICAL TO MINIMIZE THE AMOUNT OF AREA DISTURBED AT ANY POINT IN TIME).
 7. BEGIN GRADING THE SITE AND CONSTRUCTION OF THE BUILDING PAD AND STRUCTURES.
 8. TEMPORARILY STABILIZE, THROUGHOUT CONSTRUCTION IMMEDIATELY FOLLOWING THE COMPLETION OF THE MOST RECENT LAND DISTURBING/GRADING ACTIVITY, ANY DISTURBED AREAS, INCLUDING MATERIAL STOCKPILES THAT ARE SCHEDULED OR LIKELY TO REMAIN INACTIVE FOR 14 DAYS OR MORE. STABILIZATION PRACTICES SHALL BE IMPLEMENTED WITHIN 7 DAYS.
 9. INSTALL UTILITIES, STORM SEWERS, AND CURBS AND OUTLETS.
 10. PERMANENTLY STABILIZE AREAS TO BE VEGETATED AS THEY ARE BROUGHT TO FINAL GRADE.
 11. INSTALL INLET PROTECTION AT ALL STORM SEWER STRUCTURES AS EACH INLET STRUCTURE IS INSTALLED.
 12. PREPARE SITE FOR PAVING.
 13. PAVE SITE.
 14. COMPLETE GRADING AND INSTALLATION OF PERMANENT STABILIZATION OVER ALL AREA.

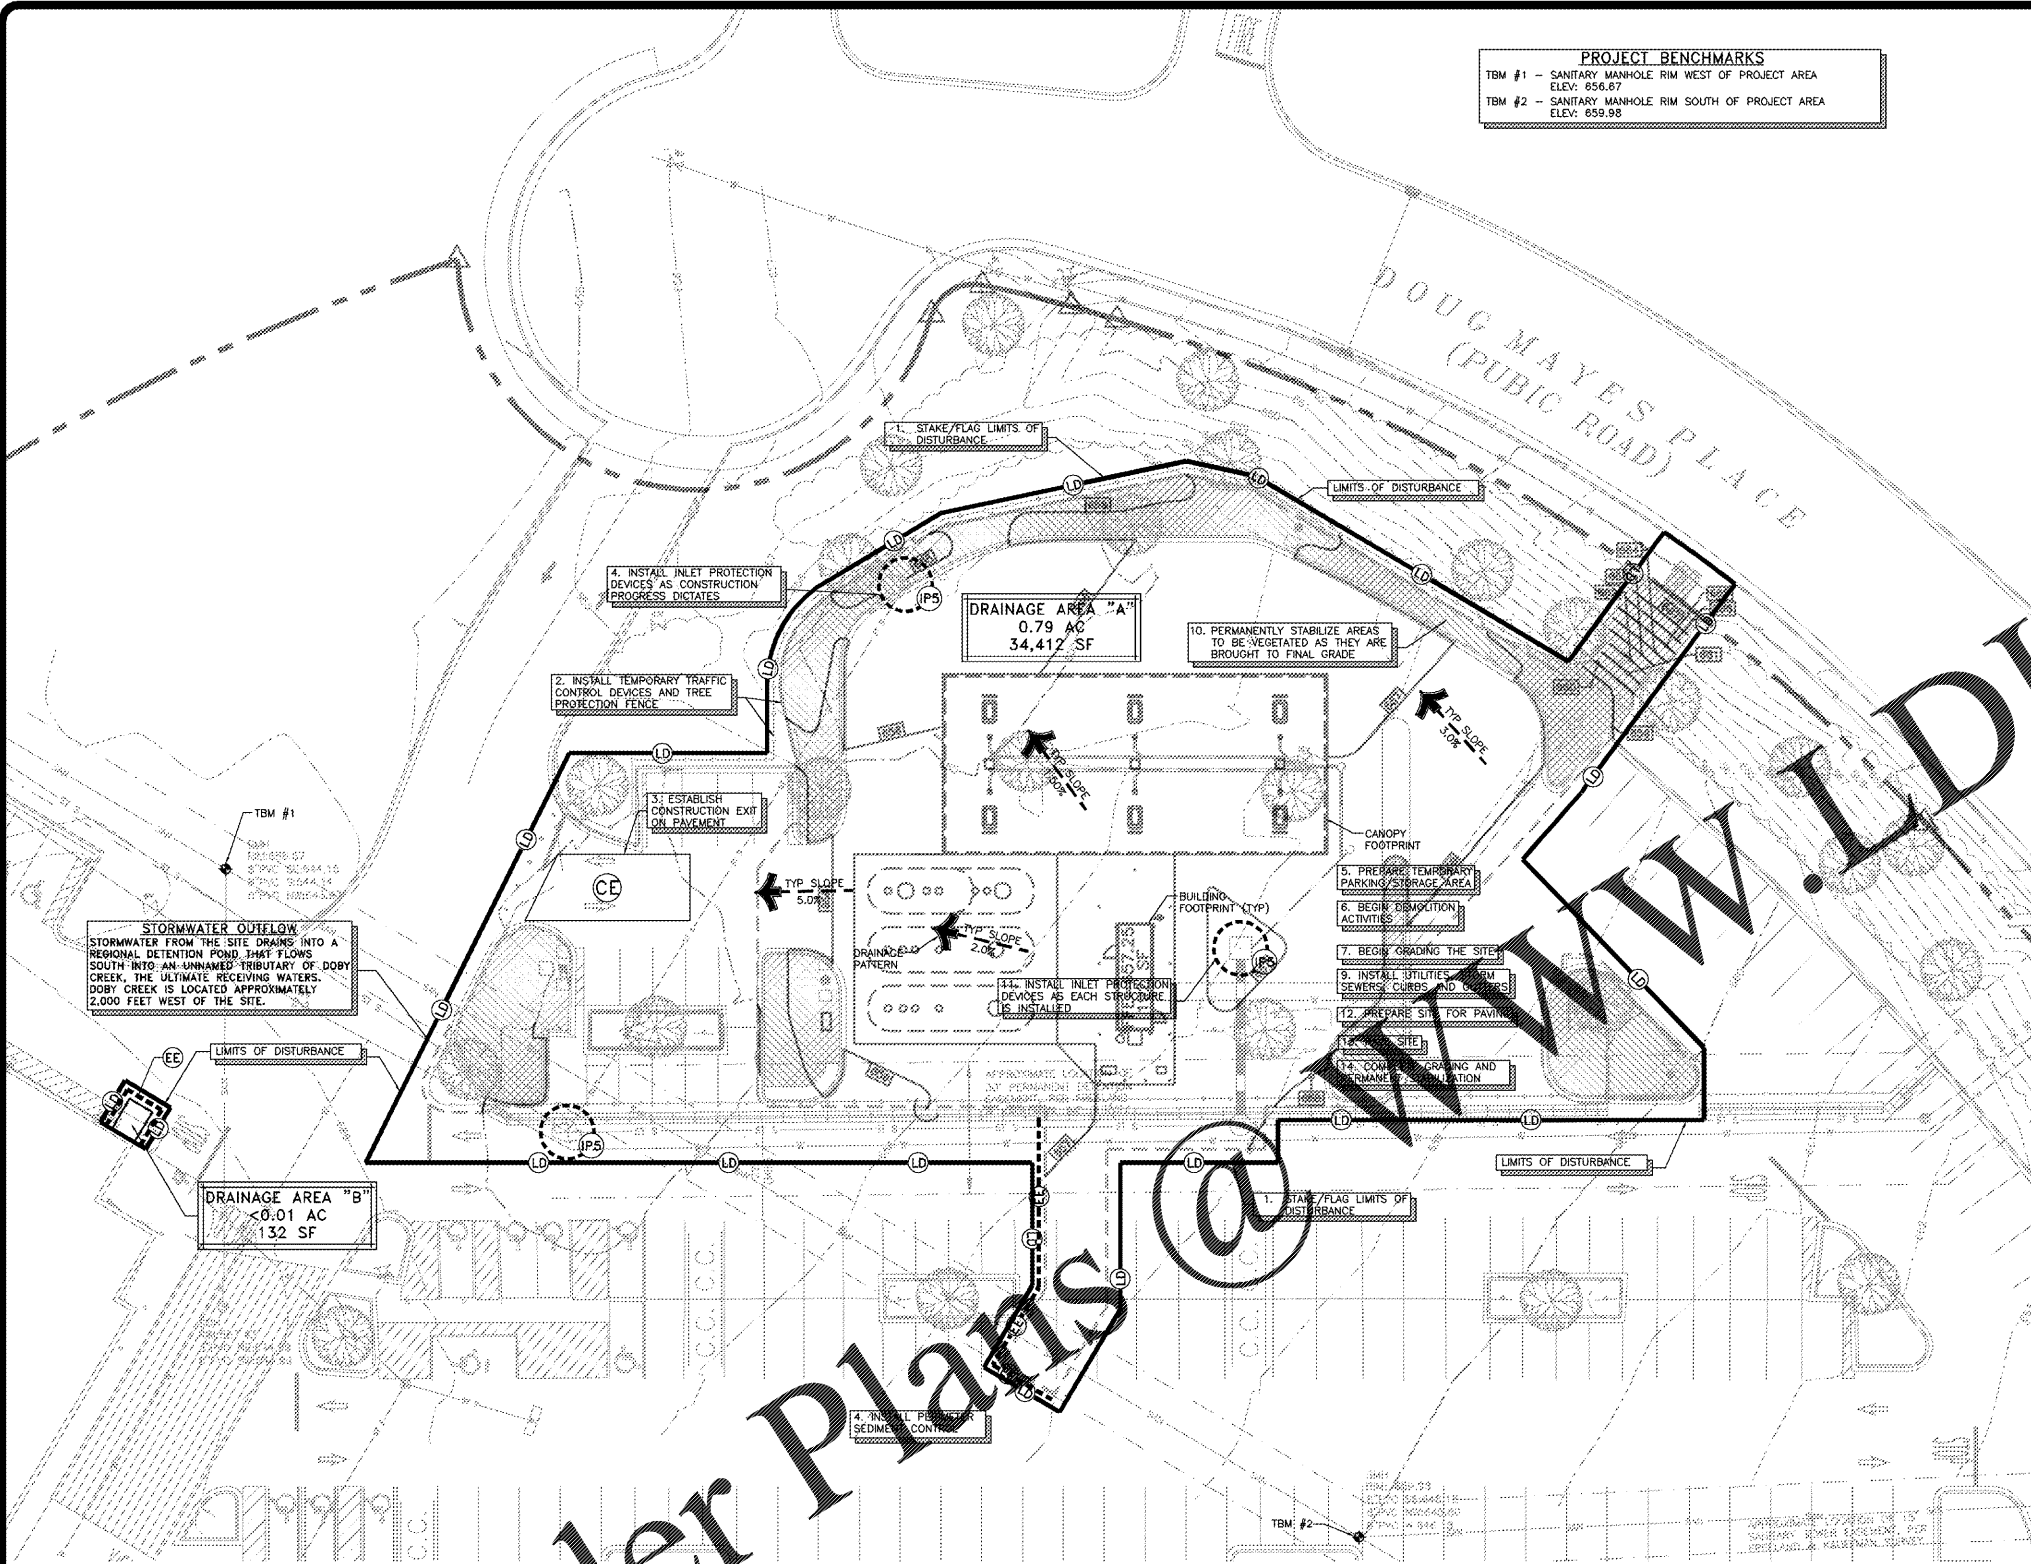

LIMITS OF DISTURBANCE
CONTRACTOR TO LIMIT DISTURBANCE OF SITE IN STRICT ACCORDANCE WITH THE EROSION CONTROL SEQUENCING SHOWN ON THIS PLAN. UNNECESSARY OR IMPROPERLY SEQUENCED CLEARING AND/OR GRADING SHALL BE PERMITTED.

NOTE TO GENERAL CONTRACTOR
PRIOR TO CONSTRUCTION, GC MUST CLEARLY DELINEATE AND MARK AREAS IDENTIFIED IN THE SWPPP OR IN THE FIELD, TO BE PROTECTED (SUCH AS, NATURAL BUFFERS, TREES, HABITATS OF ENDANGERED/THREATENED SPECIES, HISTORIC PROPERTIES, ETC.).

CAUTION NOTICE TO CONTRACTOR
IF PROPERLY IMPLEMENTED, THIS PLAN WILL PROVIDE AN EFFECTIVE MEANS FOR CONTROLLING EROSION. HOWEVER, IT IS ACKNOWLEDGED THAT NO ONE PLAN CAN BE PREPARED THAT WILL DEPICT ALL POSSIBLE CONTROL MEASURES NECESSARY FOR VARIOUS STAGES OF CONSTRUCTION. THE CONTRACTOR SHALL INCLUDE IN THE BASE BID ADEQUATE FUNDS TO PROVIDE ALL EROSION CONTROL MEASURES NECESSARY TO COMPLY WITH CODES FOR THE DURATION OF THE CONSTRUCTION PROJECT.

SPECIFICATIONS REQUIREMENTS
THE REQUIREMENTS SHOWN ON THIS PLAN ARE SUPPLEMENTED BY THE SWPPP CONTAINED WITHIN THE PROJECT SPECIFICATIONS. IN CASE OF CONFLICTS BETWEEN THE PLANS, SWPPP SPECIFICATIONS AND THE ACTUAL GENERAL PERMIT, THE MOST STRINGENT REQUIREMENTS SHALL APPLY.

TRACK OUT PREVENTION
IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO ENSURE VEHICLES ARE ADEQUATELY CLEANED PRIOR TO EXITING THE LIMITS OF DISTURBANCE. IF TRACK OUT OCCURS, THE ACTION OF THE CONTRACTOR SHALL BE TO STOP THE VEHICLE. IF THE ACTION OF THE CONTRACTOR DOES NOT SATISFACTORILY PREVENT TRACK OUT FROM EXITING THE SITE, THE CONTRACTOR SHALL INSTALL A WHEEL WASH SYSTEM AT THE CONSTRUCTION EXIT. WATER FROM THE WHEEL WASH SYSTEM SHALL BE DIRECTED TOWARDS THE CONSTRUCTION EXIT SEDIMENT TRAP FOR TREATMENT OF THE SEDIMENT LADEN WATER. THE CONTRACTOR SHALL ALSO HAVE AN ATTENDANT STATIONED AT THE CONSTRUCTION EXIT. THE ATTENDANT SHALL HAVE THE AUTHORITY TO PROHIBIT TRAFFIC FROM EXITING THE SITE IF IT APPEARS THAT VEHICLES EXITING THE SITE WILL CAUSE TRACK OUT. IT IS ULTIMATELY THE CONTRACTOR'S RESPONSIBILITY TO ENSURE THAT TRAFFIC FROM THE SITE WILL NOT CAUSE TRACK OUT FROM THE PROJECT SITE. BY SUBMITTING A BID ON THE PROJECT, THE CONTRACTOR AFFIRMS THAT ADEQUATE FUNDS HAVE BEEN INCLUDED TO ADDRESS THESE REQUIREMENTS.

CONSTRUCTION EXIT NOTICE
DUE TO THE NATURE OF THIS PROJECT, A STONE CONSTRUCTION EXIT WAS NOT PROVIDED. IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO CLEAN VEHICLES PRIOR TO THEM EXITING THE CURRENT WORK AREA WITHIN THE LIMITS OF DISTURBANCE. ANY SEDIMENT OR DUST THAT HAS ACCUMULATED ON ANY EXISTING PAVED SURFACE SHALL BE CLEANED IMMEDIATELY. ANY WATER USED FOR CLEANING VEHICLES SHALL BE COLLECTED PRIOR TO LEAVING THE LIMITS OF DISTURBANCE OR BEFORE ENTERING THE EXISTING STORM DRAINAGE SYSTEM.

DEVELOPER/OWNER
SAM'S REAL ESTATE BUSINESS TRUST
MAIL STOP 0505
702 SW 8TH STREET
BENTONVILLE, AR 72716-0505
(479) 204-3314
EMAIL: MARK.GOLDSMITH@WALMART.COM

SITE OPERATOR/GENERAL CONTRACTOR:
SUPERINTENDENT:

IMPORTANT: GC MUST SIGN ALL SHEETS AND ANY NEW PLAN SHEETS ISSUED BY THE CEC.

REVISIONS	BY

CARLSON CONSULTING ENGINEERS, INC.
7088 LEDGESTONE COMMONS
BARTLETT, TENNESSEE 38133
PH. (901) 384-0404 • FX. (901) 384-0710
NORTH CAROLINA CORPORATION# C-3504



SAM'S CLUB #6540-209
CHARLOTTE, NORTH CAROLINA
SAM'S REAL ESTATE BUSINESS TRUST
2101 SE SIMPLE SAVINGS DRIVE
BENTONVILLE, AR 72716



DRAWN	TGH
CHECKED	BKM
DATE	12/17/2019
SCALE	1=20'
JOB No.	6540-209
SHEET	4 OF 21