DOOR SCHEDULE - PHASE I AND II

LEVEL	PHASE CREATED	DOOR #	FUNCTION	CONSTRUCTION TYPE	Door Rating	DOOR TYPE	Width	Height	Thickness	Hardware Type	Lockset Function	Comments
ADA LOBBY	Phase I	001	Exterior	3 PC LAMINATED WOOD	NR	A	3' - 4"	7' - 2"	0' - 2 1/4"	OVERHEAD CLOSER, MORTISE LOCK, PANIC BAR	DEADBOLT/ENTRANCE	PROVIDE AUTOMATIC ADA OPENER - POST MOUNTED OPERATOR
ADA LOBBY	Phase I	002	Exterior	3 PC LAMINATED WOOD	NR	B	3' - 5"	7' - 2"	0' - 2 1/4"	OVERHEAD CLOSER, MORTISE LOCK, PANIC BAR	DEADBOLT/ENTRANCE	
Phase I: 2												
ADA LOBBY: 2												
LEVEL 1	Phase I	150A	Exterior	3 PC LAMINATED WOOD	NR	D	6' - 0"	7' - 10"	0' - 2 1/4"	OVERHEAD CLOSER, MORTISE LOCK, PANIC BAR	DEADBOLT/ENTRANCE	
LEVEL 1	Phase I	154A	Interior	SOLID CORE WOOD	NR	G-SIMILAR	6' - 0"	7' - 0"	0' - 1 3/4"	OVERHEAD CLOSER, MORTISE LOCK, PANIC BAR	DEADBOLT	PROVIDE ALARM
LEVEL 1	Phase I	156A	Interior	SOLID CORE WOOD	NR	I	3' - 0"	7' - 0"	0' - 1 3/4"	OVERHEAD CLOSER	PRIVACY SET	
LEVEL 1	Phase I	156A	Interior	SOLID CORE WOOD	NR	I	3' - 4"	7' - 0"	0' - 1 3/4"	OVERHEAD CLOSER	STORAGE	
LEVEL 1	Phase I	158A	Interior	SOLID CORE WOOD	60 MIN	I	3' - 0"	7' - 0"	0' - 1 3/4"	OVERHEAD CLOSER, PANIC BAR	PASSAGE SET	
Phase I: 5												
LEVEL 1	Phase II	100A	Exterior	3 PC LAMINATED WOOD	NR	C	6' - 0"	7' - 10"	0' - 2 1/4"	OVERHEAD CLOSER, MORTISE LOCK, PANIC BAR	DEADBOLT/ENTRANCE	
LEVEL 1	Phase II	100B	Interior	3 PC LAMINATED WOOD	NR	E	6' - 4"	6' - 8"	0' - 2 1/4"	OVERHEAD CLOSER, MORTISE LOCK, PANIC BAR	CLASSROOM FUNCTION	
LEVEL 1	Phase II	100C	Interior	3 PC LAMINATED WOOD	NR	E	6' - 4"	6' - 8"	0' - 2 1/4"	OVERHEAD CLOSER, MORTISE LOCK, PANIC BAR	DEADBOLT	
LEVEL 1	Phase II	101A	Interior	3 PC LAMINATED WOOD	NR	E	6' - 4"	6' - 8"	0' - 2 1/4"	OVERHEAD CLOSER, MORTISE LOCK, PANIC BAR	CLASSROOM FUNCTION	
LEVEL 1	Phase II	102A	Interior	SOLID CORE WOOD	NR	F	3' - 0"	7' - 0"	0' - 1 3/4"	CYLINDER LOCK WITH FIXED LEAF	STORAGE	
LEVEL 1	Phase II	102B	Interior	SOLID CORE WOOD	NR	F	3' - 0"	7' - 0"	0' - 1 3/4"	CYLINDER LOCK WITH FIXED LEAF	STORAGE	
LEVEL 1	Phase II	104A	Interior	SOLID CORE WOOD	NR	G	6' - 0"	7' - 0"	0' - 1 3/4"	OVERHEAD CLOSER, MORTISE LOCK, PANIC BAR	DEADBOLT	PROVIDE MAGNETIC HOLD OPEN, ALARM
LEVEL 1	Phase II	104B	Interior	SOLID CORE WOOD	NR	G-SIMILAR	6' - 0"	7' - 0"	0' - 1 3/4"	OVERHEAD CLOSER, MORTISE LOCK, PANIC BAR	PASSAGE SET	PROVIDE MAGNETIC HOLD OPEN
LEVEL 1	Phase II	111A	Interior	SOLID CORE WOOD	NR	H	3' - 0"	7' - 0"	0' - 1 3/4"	OVERHEAD CLOSER	CLASSROOM FUNCTION	
LEVEL 1	Phase II	111B	Interior	SOLID CORE WOOD	NR	H	3' - 0"	7' - 0"	0' - 1 3/4"	OVERHEAD CLOSER	CLASSROOM FUNCTION	
LEVEL 1	Phase II	112A	Interior	SOLID CORE WOOD	NR	H	3' - 0"	7' - 0"	0' - 1 3/4"	OVERHEAD CLOSER	OFFICE FUNCTION	
LEVEL 1	Phase II	113A	Interior	SOLID CORE WOOD	NR	H	3' - 0"	7' - 0"	0' - 1 3/4"	OVERHEAD CLOSER	OFFICE FUNCTION	
LEVEL 1	Phase II	116A	Interior	SOLID CORE WOOD	NR	I	3' - 0"	7' - 0"	0' - 1 3/4"	OVERHEAD CLOSER	PRIVACY SET	
LEVEL 1	Phase II	123A	Interior	3 PC LAMINATED WOOD	NR	E	6' - 4"	6' - 8"	0' - 2 1/4"	OVERHEAD CLOSER, PANIC BAR	CLASSROOM FUNCTION	
LEVEL 1	Phase II	124B	Interior	3 PC LAMINATED WOOD	NR	E	6' - 4"	6' - 8"	0' - 2 1/4"	OVERHEAD CLOSER, MORTISE LOCK, PANIC BAR	CLASSROOM FUNCTION	
Phase II: 15												
LEVEL 1: 20												
LEVEL 2	Phase I	200A	Interior	SOLID CORE WOOD	NR	G	6' - 0"	7' - 0"	0' - 1 3/4"	OVERHEAD CLOSER, MORTISE LOCK, PANIC BAR	DEADBOLT	PROVIDE MAGNETIC HOLD OPEN
LEVEL 2	Phase I	200B	Interior	SOLID CORE WOOD	NR	G-SIMILAR	6' - 0"	7' - 0"	0' - 1 3/4"	OVERHEAD CLOSER, MORTISE LOCK, PANIC BAR	PASSAGE SET	
LEVEL 2	Phase I	200C	Interior	SOLID CORE WOOD	60 MIN	I	3' - 0"	7' - 0"	0' - 1 3/4"	OVERHEAD CLOSER, PANIC BAR	PASSAGE SET	
LEVEL 2	Phase I	202A	Interior	SOLID CORE WOOD	NR	H	3' - 0"	7' - 0"	0' - 1 3/4"	OVERHEAD CLOSER	PASSAGE SET	
LEVEL 2	Phase I	203A	Interior	SOLID CORE WOOD	NR	H	3' - 0"	7' - 0"	0' - 1 3/4"	OVERHEAD CLOSER	PASSAGE SET	
LEVEL 2	Phase I	205A	Interior	3 PC LAMINATED WOOD	NR	E	6' - 4"	6' - 8"	0' - 2 1/4"	OVERHEAD CLOSER, MORTISE LOCK, PANIC BAR	CLASSROOM FUNCTION	
LEVEL 2	Phase I	213A	Interior	3 PC LAMINATED WOOD	NR	E	6' - 4"	6' - 8"	0' - 2 1/4"	OVERHEAD CLOSER, MORTISE LOCK, PANIC BAR	CLASSROOM FUNCTION	
LEVEL 2	Phase I	216A	Interior	SOLID CORE WOOD	NR	H	3' - 0"	7' - 0"	0' - 1 3/4"	OVERHEAD CLOSER, MORTISE LOCK	CLASSROOM FUNCTION	
LEVEL 2	Phase I	260A	Interior	SOLID CORE WOOD	NR	G	6' - 0"	7' - 0"	0' - 1 3/4"	OVERHEAD CLOSER, PANIC BAR	DEADBOLT	PROVIDE MAGNETIC HOLD OPEN
LEVEL 2	Phase I	264D	Interior	SOLID CORE WOOD	NR	C-SIM	6' - 0"	7' - 0"	0' - 1 3/4"	OVERHEAD CLOSER, MORTISE LOCK, PANIC BAR	STORAGE	PROVIDE MAGNETIC HOLD OPEN
Phase I: 10												
LEVEL 2: 10												

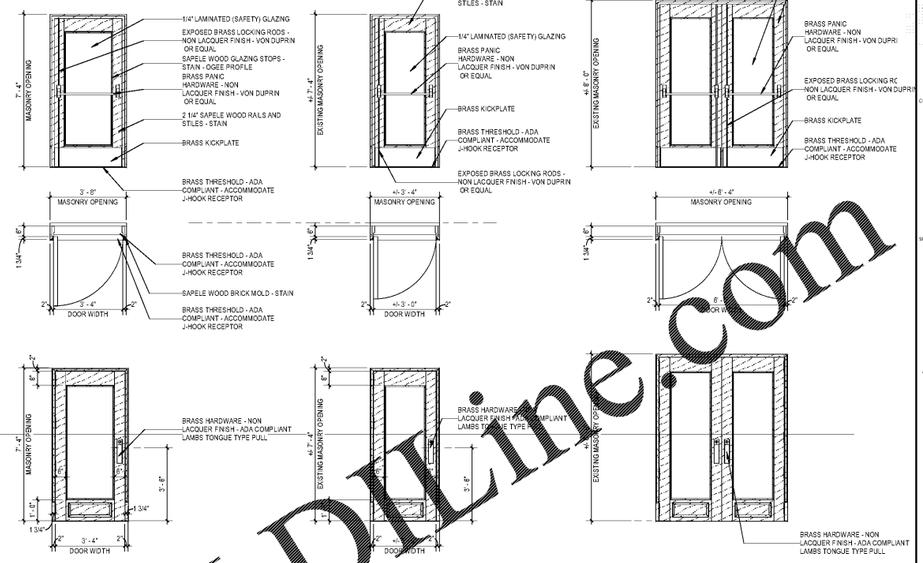

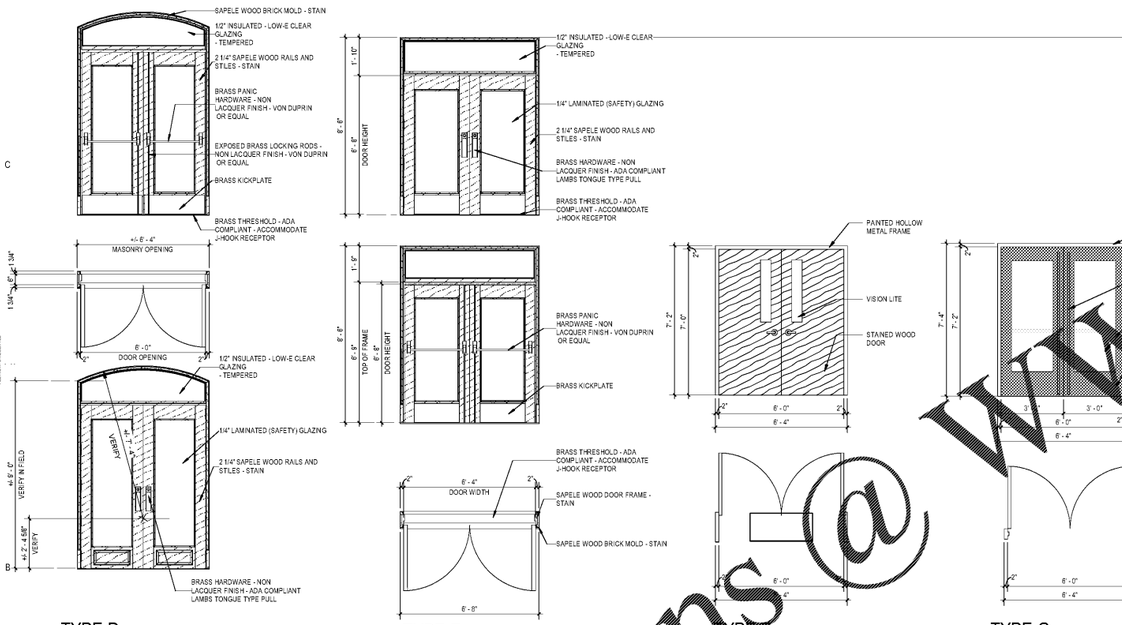

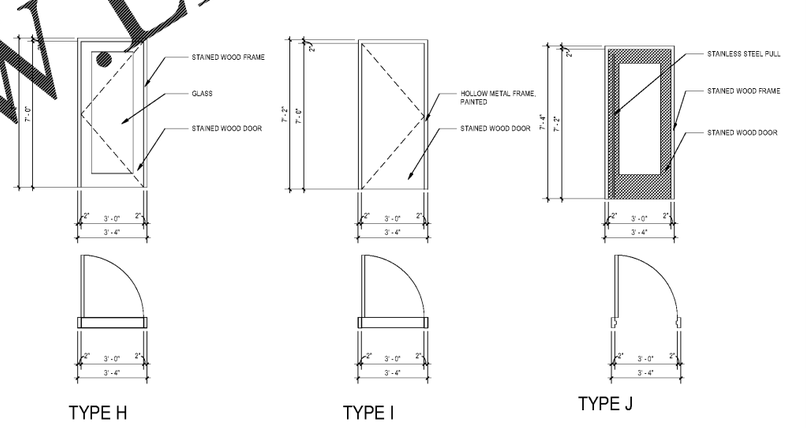

DOOR TYPES
3/8" = 1'-0"

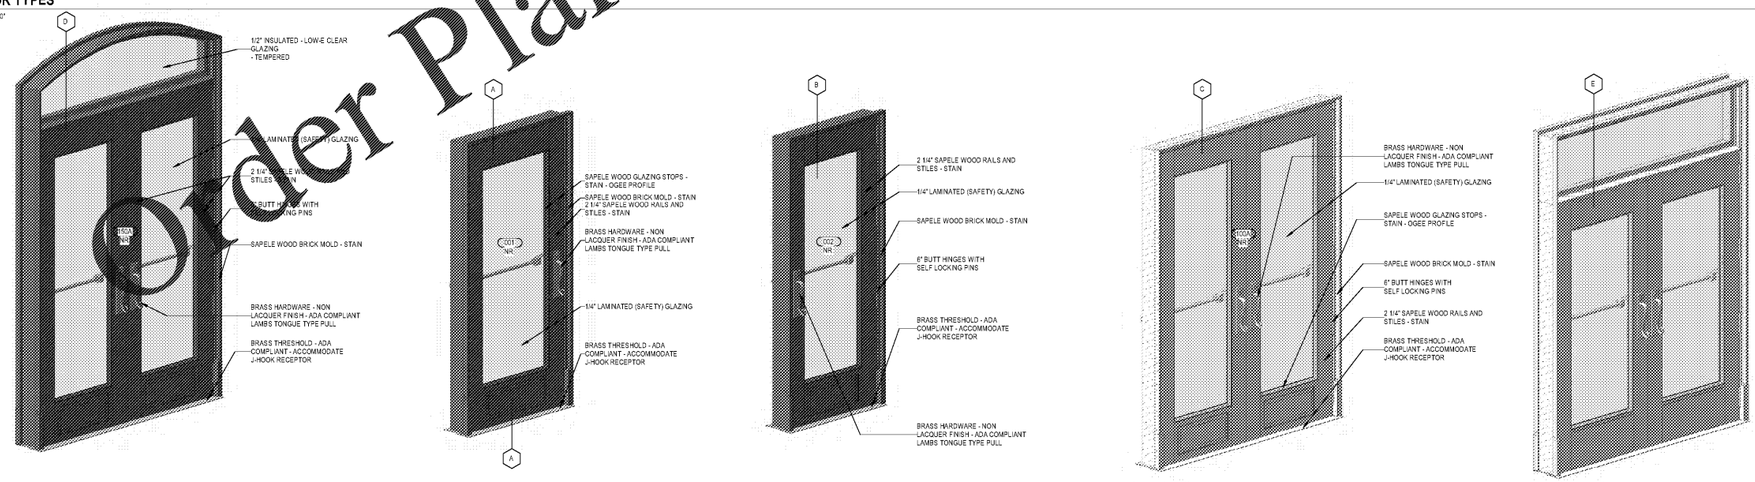

3 A001 **0000 - NORTH WING ENTRY DOOR** — 1

1 A001 **0000 - DOOR - ADA ENTRY** — 2

2 A001 **0000 - REPLACEMENT DOOR AT EGRESS STAIR** — 3

4 A001 **0000 - FRONT ENTRY DOOR** — 4

5 A001 **0000 - DOOR IN WOOD SURROUND** — 5

Order Plans @ WWW.LDRLine.com

mcmillan pazdan smith ARCHITECTURE
CONSULTANT LOGO

SEALS

AIKEN COUNTY

AIKEN PUBLIC LIBRARY & NORTH WING RENOVATION

314 CHESTERFIELD ST S, AIKEN, SC

SHEET ISSUE:

NO.	DATE	DESCRIPTION	BY
C	03/16/2020	DOOR AND ROOF REVISIONS	
D	04/10/2020	PERMIT SET	
E	07/02/2020	ISSUED FOR BIDS	

ISSUED FOR BIDS: 07/02/2020

PRINCIPAL IN CHARGE: DRM
PROJECT ARCHITECT: TA
DRAWN BY: Author

SHEET TITLE:
DOOR SCHEDULE

SHEET NO: A800

PROJ. NO: 019477.01