


EROSION, SEDIMENTATION & POLLUTION CONTROL PLAN CHECKLIST
COMMON DEVELOPMENT CONSTRUCTION PROJECTS (Primary and Tertiary Permits)
SWCD:
Project Name: JONESBORO ROAD PARK Address: CITY OF McDONOUGH
City/Country: McDONOUGH/GEORGIA Date on Plan: 5/8/2018
Name & email of person filling out checklist: Khammoun@VaughnMelton.com
Plan Number: 071920-33 TO BE SHOWN ON ES&P PLAN

- | | | |
|-----|-----|--|
| 4 | Y | 1. The appropriate Erosion, Sedimentation and Pollution Control Plan Checklist established by the Commission as of January 1 of the year in which the land disturbing activity was permitted. (The completed Checklist must be submitted with the Commission, signature and seal of the certified design professional. (Signature, seal and seal of contractor must be on each permit pertaining to ES&P Plan or the Plan will not be reviewed.) |
| 5-7 | Y | 2. Level of certification number issued by the Commission, signature and seal of the certified design professional. (Signature, seal and seal of contractor must be on each permit pertaining to ES&P Plan or the Plan will not be reviewed.) |
| | N/A | 3. Link of distance shall be no greater than 50 acres at any one time without prior written authorization from the EPO District Office. If EPO approves the request to disturb 20 acres or more at any one time, the Plan must include at least 4 of the BMPs listed in Appendix 1 of this checklist. * (A copy of the written report by EPO must be attached to the Plan for the Plan to be reviewed.) |
| ALL | Y | 4. The name and phone number of the 24-hour local contact responsible for erosion, sedimentation and pollution control. |
| ALL | Y | 5. Provide the name, address, phone, and email, and phone number of the primary permittee or tertiary permittee. |
| 00 | Y | 6. Note label and disturbed acreage of the project or phase under construction. |
| 00 | Y | 7. Provide the GPS location of the construction site for the site. Give the Latitude and Longitude in decimal degrees. |
| ALL | Y | 8. Initial date of the Plan and the date of any revisions made to the Plan including the entity who requested the revisions. |
| 00 | Y | 9. Description of the nature of construction activity. |
| 00 | Y | 10. Provide vicinity map showing site's relation to surrounding areas. Include designation of specific phases, if necessary. |
| 00 | Y | 11. Identify the project receiving waters and describe all sensitive adjacent areas including streams, lakes, residential areas, wetlands, archeological, etc. when they may be affected. |
| 5-7 | Y | 12. Design professional's certification statement and signature that the site was visited prior to development of the ES&P Plan. See Appendix 2 of the permit. |
| 5-7 | Y | 13. Design professional's certification statement and signature that the permittee's ES&P Plan provides for an appropriate and sufficient erosion control system of BMPs and conforming to meet requirements as stated in 22 O.C.G. § 27-2-32 of the permit. |
| 4 | Y | 14. Clearly note the statement that "The design professional who prepared the ES&P Plan is to inspect the installation of the initial sediment storage requirements and perimeter control BMPs within 7 days after installation." (It includes a copy of the permit). |
| 4 | Y | 15. Clearly note the statement that "Non-exempt activities shall be conducted within the 25 or 50-foot undisturbed stream buffers as measured from the point of natural vegetation or within 25-foot of the coastal marshland buffer as measured from the Jurisdictional Determination Line without first acquiring the necessary variance and permits." |
| | N/A | 16. Provide a description of any buffer encroachments and indicate whether a buffer variance is required. |

- | | | |
|---|-----|--|
| 4 | Y | 17. Clearly note the statement that "Non-exempt activities to the ES&P Plan which have a significant effect on BMPs with a hydraulic component must be certified by the design professional." |
| 4 | Y | 18. Clearly note the statement that "Bodies outside shall not be discharged to waters of the State, except as authorized by a Section 404 permit." |
| 4 | Y | 19. Clearly note the statement that "The escape of sediment from the site shall be prevented by the installation of erosion and sediment control measures and practices prior to land disturbing activities." |
| 4 | Y | 20. Clearly note statement that "Erosion control measures shall be maintained at all times. If a implementation of the approved Plan does not provide for effective erosion control, additional erosion and sediment control measures shall be implemented to control or treat the sediment source." |
| 4 | Y | 21. Clearly note the statement "Any disturbed area left exposed for a period greater than 14 days shall be stabilized with mulch or temporary seeding." |
| 5 | Y | 22. Indication that the appropriate portion of the primary permittee ES&P Plan is to be provided to each secondary permittee prior to the secondary commencing any construction activity, and that each secondary shall sign the Plan or portion of the Plan applicable to their site. List the names and addresses of all secondary permittees. * |
| | N/A | 23. Any construction activity which discharges storm water into an Impaired Stream Segment or within 1 linear mile upstream of and within the same watershed as any portion of an Impaired Stream Segment, must comply with Part D, C of the permit. Include the completed Appendix 1 listing all the BMPs that will be used for those areas of the site which discharge to the Impaired Stream Segment. * |
| | N/A | 24. If a TRMEL implementation Plan for sediment has been finalized for the Impaired Stream Segment (identified in Item 23 above) at least six months prior to submission of this Plan, the ES&P Plan must address any site-specific conditions or requirements included in the TRMEL implementation Plan. * |
| | N/A | 25. BMPs for container washdowns of tanks, concrete mixer trucks, tippers and the rear of the vehicle. Washout of the drum at the construction site is prohibited. |
| | N/A | 26. Provide BMPs for the remediation of all petroleum spills and leaks. |
| | N/A | 27. Description of practices to provide cover for loading materials and building materials on site. * |
| | N/A | 28. Description of the practices that will be installed during the construction process to control pollutants in storm water that will occur after construction operations have been completed. |
| | N/A | 29. Description of the practices that will be used to reduce the pollutants to stormwater discharge. Sediment storage volume must be in place prior to and during all land disturbing activities until final stabilization of the site has been achieved. A written justification explaining the location to use equivalent control when a sediment basin is not achievable must be included in the Plan for each common drainage location in which a sediment basin is not practical. A written justification as to why 47 cubic yards of storage is not achievable must also be given. Written details from the Manual must be included for structural BMPs and all conditions used by the design professional to obtain the required sediment storage when using equivalent controls. When discharging from sediment basins and impoundments, practices are required to utilize outlet structures that withdraw water from the surface, create riffles, float structures that withdraw water from the surface as not possible, a written justification explaining this decision must be included in the Plan. |
| | N/A | 30. Location of Best Management Practices that are consistent with, and not less stringent than, the Manual for Erosion and Sediment Control in Georgia. Use uniform coding symbols from the Manual, Chapter 6, with legend. |
| | N/A | 31. Provide detailed drawings for all structural practices. Specifications must, at a minimum, meet the guidelines set forth in the Manual for Erosion and Sediment Control in Georgia. |
| | N/A | 32. Provide complete requirements of sampling frequency and reporting of sampling results. * |
| | N/A | 33. Provide complete details for retention of records as per Part D, F of the permit. * |
| | N/A | 34. Description of analytical methods to be used to collect and analyze the samples from each location. * |
| | N/A | 35. Appendix B-1 shall be used for all soil sampling points where applicable. * |
| | N/A | 36. Define all sampling locations (topographic, permeable and impermeable streams and other water bodies into which storm water is discharged). * |
| | N/A | 37. A description of appropriate controls and measures that will be implemented at the construction site including: (1) initial sediment storage requirements and perimeter control BMPs, (2) intermediate grading and drainage BMPs, and (3) final BMPs. For construction sites where there will be no mass grading and the initial perimeter control BMPs, intermediate grading and drainage BMPs, and final BMPs are the same, the Plan may combine all of the BMPs into a single phase. |

- | | | |
|-----|-----|---|
| 5-7 | Y | 38. Plan addresses BMPs for all phases of common development including individual building lots and sub-parcels, etc. regardless of who owns or operates the individual site. Include physical and any additional site applicable. |
| 5-7 | Y | 39. Graphic scales and north arrow. |
| | N/A | 40. Existing and proposed contour lines with contours lines drawn at an interval in accordance with the following:
Map Scale Ground Slope Contour Interval, ft
1 inch = 100 ft or larger scale Flat 0 - 2% 3 or 2 ft
Rolling 2 - 5% 1 or 2 ft
Steep 5+ % 2.5 or 10 ft |
| | N/A | 41. Use of alternative BMPs whose performance has been documented to be equivalent to or superior to conventional BMPs as verified by a Design Professional (unless otherwise verified by EPO or the Georgia Soil and Water Conservation Commission). Please refer to the Alternative BMP Guidance Document found at www.gswcc.org. |
| | N/A | 42. Use of alternative BMP for application to the Equivalent BMP List. Please refer to Appendix A-2 of the Manual for Erosion & Sediment Control in Georgia 2015 Edition. |
| | N/A | 43. Delineation of the applicable 25 foot or 50-foot undisturbed buffers adjacent to State waters and any additional buffers required by the Local Issuing Authority. Clearly note and delineate all areas of impact. |
| | N/A | 44. Delineation of on-site wetlands and all State waters location on and within 200 feet of the project site. |
| | N/A | 45. Delineation and average of contributing drainage basins on the project site. |
| | N/A | 46. Provide hydrology study and maps of drainage basins for both the pre- and post-developed conditions. * |
| | N/A | 47. An estimate of the runoff coefficient or peak discharge flow of the site prior to and after construction activities are completed. * |
| | N/A | 48. Storm-drain pipe and weir velocities with appropriate outlet protection to accommodate discharges without erosion. Identify delineate all storm discharge points. |
| | N/A | 49. Soil series for the project site and their delineation. |
| | N/A | 50. The limits of disturbance for each phase of construction. |
| | N/A | 51. Provide a minimum of 67 cubic yards of sediment storage per acre drained using a temporary sediment basin, retrofitted detention pond, and/or excavated inlet sediment traps for each common drainage location. Sediment storage volume must be in place prior to and during all land disturbing activities until final stabilization of the site has been achieved. A written justification explaining the location to use equivalent control when a sediment basin is not achievable must be included in the Plan for each common drainage location in which a sediment basin is not practical. A written justification as to why 47 cubic yards of storage is not achievable must also be given. Written details from the Manual must be included for structural BMPs and all conditions used by the design professional to obtain the required sediment storage when using equivalent controls. When discharging from sediment basins and impoundments, practices are required to utilize outlet structures that withdraw water from the surface, create riffles, float structures that withdraw water from the surface as not possible, a written justification explaining this decision must be included in the Plan. |
| | N/A | 52. Location of Best Management Practices that are consistent with, and not less stringent than, the Manual for Erosion and Sediment Control in Georgia. Use uniform coding symbols from the Manual, Chapter 6, with legend. |
| | N/A | 53. Provide detailed drawings for all structural practices. Specifications must, at a minimum, meet the guidelines set forth in the Manual for Erosion and Sediment Control in Georgia. |
| | N/A | 54. Provide vegetative plan, noting all temporary and permanent vegetative practices, include species, planting dates and seeding, fertilizer, lime and mulching rates. Vegetative plantings shall be specific for appropriate time of year that seeding will take place and for the responsible geographic region(s). |

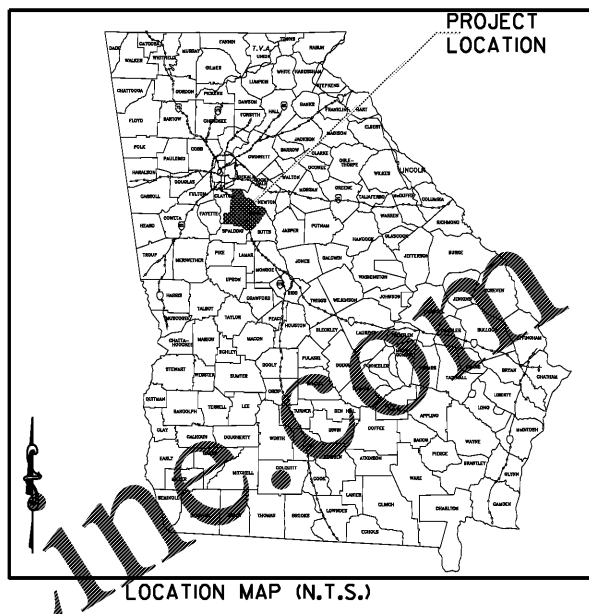

LOCATION MAP (N.T.S.)

NO BUFFER VARIANCE IS REQUIRED

THERE ARE NO DELINEATED WETLANDS BEING DISTURBED ON THE SITE

THERE ARE STATE WATERS ON OR WITHIN 200 FT OF THIS PROPERTY

DISTURBANCE ON THIS SITE IS MORE THAN 1.0 AC AND WILL REQUIRE NPDES TESTING AND INSPECTIONS.

THIS DOES NOT, HOWEVER, RELIEVE THE DEVELOPER AND CONTRACTORS FROM ANY ADDITIONAL BMP AND EROSION CONTROL MEASURES, IMPLEMENTATION AND INSPECTIONS, PER THE "MANUAL FOR EROSION AND SEDIMENT CONTROL IN GEORGIA, LATEST EDITION.

ANY DISTURBED AREAS LEFT EXPOSED FOR A PERIOD GREATER THAN 14 DAYS SHALL BE STABILIZED WITH MULCH OR TEMPORARY SEEDING

ALL EROSION AND SEDIMENTATION CONTROL MEASURES TO BE INSPECTED BY THE CONTRACTOR EACH WORKING DAY. ALL STRUCTURES TO BE CLEANED OUT OR REPLACED AS PER THE "MANUAL FOR EROSION AND SEDIMENT CONTROL IN GEORGIA" OR AS SHOWN ON THE STRUCTURAL DETAILS WITHIN THE PLANS.

PRODUCT SPECIFIC PRACTICES:
PETROLEUM BASED PRODUCTS - CONTAINERS FOR PRODUCTS SUCH AS FUELS, LUBRICANTS AND TARS WILL BE INSPECTED DAILY FOR LEAKS AND SPILLS. THIS INCLUDES ON SITE VEHICLE AND MACHINERY DAILY INSPECTIONS AND REGULAR PREVENTATIVE MAINTENANCE OF SUCH EQUIPMENT. EQUIPMENT MAINTENANCE AREAS WILL BE LOCATED AWAY FROM STATE WATER, NATURAL DRAINS AND STORM WATER DRAINAGE INLETS. IN ADDITION, TEMPORARY FUELING TANKS SHALL HAVE SECONDARY CONTAINMENT LINER TO PREVENT / MINIMIZE SITE CONTAMINATION. DISCHARGE OF OILS, FUELS AND LUBRICANTS IS PROHIBITED. PROPER DISPOSAL METHODS WILL INCLUDE COLLECTION IN A SUITABLE CONTAINER AND DISPOSAL AS REQUIRED BY LOCAL AND STATE REGS.

PAINTS / FINISHES / SOLVENTS - ALL PRODUCTS WILL BE STORED IN TIGHTLY SEALED ORIGINAL CONTAINERS WHEN NOT IN USE. EXCESS PRODUCT WILL NOT BE DISCHARGED TO THE STORM WATER COLLECTION SYSTEM. EXCESS PRODUCT MATERIALS USED WITH THESE PRODUCTS AND PRODUCT CONTAINERS WILL BE DISPOSED OF ACCORDING TO MANUFACTURER'S SPECIFICATIONS AND RECOMMENDATIONS.

CONCRETE TRUCK WASHING - NO CONCRETE TRUCKS WILL BE ALLOWED TO WASH OUT OR DISCHARGE SURPLUS CONCRETE OR DRUM WASH WATER ON SITE.

FERTILIZER / HERBICIDES - THESE PRODUCTS WILL BE APPLIED AT RATES THAT DON'T EXCEED THE MANUFACTURER'S SPECIFICATIONS OR ABOVE THE GUIDELINES SET FORTH IN THE CROP ESTABLISHMENT OR IN THE GSWCC MANUAL FOR EROSION AND SEDIMENT CONTROL IN GEORGIA. ANY STORAGE OF THESE MATERIALS WILL BE UNDER ROOF IN SEALED CONTAINERS.

BUILDING MATERIALS - NO BUILDING OR CONSTRUCTION MATERIALS WILL BE BURIED OR DISPOSED OF ONSITE. ALL SUCH MATERIAL WILL BE DISPOSED OF IN PROPER WASTE DISPOSAL PROCEDURES.

CRITICAL WORK ZONE EROSION CONTROL NOTES:
SHADED AREAS SHOWN ON GRADING PHASE EROSION CONTROL PLANS REPRESENT CRITICAL WORK ZONES. AT THE END OF EACH WORK DAY ALL SLOPES 2:1 OR STEEPER AND HIGHER THAN 5 FEET SHALL RECEIVE SURFACE ROUGHENING, POLYMERS, AND EROSION CONTROL MATTING. ADDITIONALLY, ALL FILL SLOPES SHALL RECEIVE A DIVERSION DIKE AND TEMPORARY DOWN DRAINS ALONG THE TOP OF THE SLOPE PREVENTING DRAINAGE SPILLING OVER THE EDGE AND DOWN THE FACE OF THE SLOPE. THE TEMPORARY DOWN DRAINS SHALL BE CONSTRUCTED WITH PERFORATED STAND PIPES AT THE TOP OF THE SLOPE AND CONSTRUCTED EACH DAY AS THE SLOPE INCREASES IN HEIGHT.

THE CONTRACTOR SHALL NOTIFY THE LICENSED PROFESSIONAL WHO PREPARED THIS PLAN IF MORE THAN 1320 GALLONS OF PETROLEUM IS STORED ON SITE (THIS INCLUDES CAPACITIES OF EQUIPMENT) OR ANY ONE PIECE OF EQUIPMENT HAS A CAPACITY GREATER THAN 860 GALLONS. THE CONTRACTOR WILL NEED A SPILL PREVENTION CONTAINMENT AND COUNTERMEASURES PLAN PREPARED BY THAT LICENSED PROFESSIONAL.

ANY AMENDMENT TO THE EROSION CONTROL PLANS WHICH HAVE A SIGNIFICANT EFFECT ON BMP'S WITH HYDRAULIC COMPONENT MUST BE CERTIFIED BY DESIGN PROFESSIONAL.

ES&P PLAN IS IN COMPLIANCE WITH WASTE DISPOSAL, SANITARY SEWER AND SEPTIC TANK REGULATIONS DURING AND AFTER CONSTRUCTION ACTIVITIES ARE COMPLETE. DUMPSTERS TO REMAIN COVERED. CONSTRUCTION WASTE MAY NOT BE BURIED ON SITE AND BE TAKEN TO A LANDFILL APPROVED FOR CONSTRUCTION WASTE. PORT-O-JOHN'S TO BE USED, FURNISHED AND MAINTAINED BY A LICENSED PROVIDER. NO SEPTIC TO BE USED.

OFF SITE VEHICLE TRACKING:
A STABILIZED CONSTRUCTION EXIT HAS BEEN PROVIDED TO HELP REDUCE VEHICLE TRACKING OF SEDIMENT. SEE SHEET 01-1 AND 01-2 FOR CONSTRUCTION EXIT LOCATION AND DETAILS. THE PAVED STREET ADJACENT TO THE SITE EXIT WILL BE INSPECTED DAILY FOR TRACKING OF MUD, DIRT OR ROCKS. DUMP TRUCKS HAULING MATERIAL FROM THE CONSTRUCTION SITE WILL BE COVERED WITH TARPAULIN.

HAZARDOUS WASTES:
ALL HAZARDOUS WASTE MATERIALS WILL BE DISPOSED IN THE MANNER SPECIFIED BY LOCAL, STATE, AND/OR FEDERAL REGULATIONS OR BY THE MANUFACTURER OF SUCH PRODUCTS. THE JOB SITE SUPERINTENDENT, WHO WILL ALSO BE RESPONSIBLE FOR VERIFYING THAT THESE PRACTICES ARE FOLLOWED, WILL INSTRUCT SITE PERSONNEL IN THESE PRACTICES. MATERIAL SAFETY DATA SHEETS (MSDS) FOR EACH SUBSTANCE WITH HAZARDOUS PROPERTIES, THAT IS USED ON THE JOB SITE, WILL BE OBTAINED AND USED FOR THE PROPER MANAGEMENT OF POTENTIAL WASTES THAT MAY RESULT FROM THESE PRODUCTS. AN MSDS WILL BE POSTED IN THE IMMEDIATE AREA WHERE SUCH PRODUCTS ARE STORED AND/OR USED AND ANOTHER COPY OF EACH MSDS WILL BE MAINTAINED IN THE ES&P FILE AT THE JOB SITE CONSTRUCTION OFFICE. EACH EMPLOYEE WHO MUST HANDLE A SUBSTANCE WITH HAZARDOUS PROPERTIES WILL BE INSTRUCTED ON THE USE OF MSDS SHEETS AND THE SPECIFIC INFORMATION IN THE APPLICABLE MSDS FOR THE PRODUCT HE/SHE IS USING. PARTIALLY REGARDING SPILL CONTROL, TSP CONTROL, AND PPE.

THE CONTRACTOR WILL IMPLEMENT THE SPILL PREVENTION CONTROL AND COUNTERMEASURES (SPCC) PLAN FOUND WITHIN THIS ES&P PLAN AND WILL TRAIN ALL PERSONNEL IN THE PROPER CLEANUP AND HANDLING OF SPILLED MATERIALS. NO SPILLS OR OILS WILL BE ALLOWED TO OCCUR. THE STORMWATER DISCHARGE WILL BE CONTAINED ON SITE UNTIL APPROPRIATE MEASURES IN COMPLIANCE WITH STATE AND FEDERAL REGULATIONS ARE TAKEN TO DISPOSE OF SUCH CONTAMINATED STORMWATER. IT SHALL BE THE RESPONSIBILITY OF THE LICENSED SUPERINTENDENT TO PROPERLY TRAIN ALL PERSONNEL IN THE USE OF THE SPCC PLAN.

SANITARY WASTE UNITS:
A MINIMUM OF ONE (1) PORTABLE SANITARY WASTE UNIT WILL BE PROVIDED FOR EVERY TEN (10) WORKERS ON THE SITE. ALL SANITARY WASTE WILL BE COLLECTED FROM THE PORTABLE UNITS A MINIMUM OF ONE TIME PER WEEK BY A LICENSED PORTABLE FACILITY PROVIDER IN COMPLETE COMPLIANCE WITH LOCAL AND STATE REGULATIONS.

ALL SANITARY WASTE UNITS WILL BE LOCATED IN AN AREA WHERE THE LIKELIHOOD OF THE UNIT CONTRIBUTING TO STORM WATER DISCHARGE IS NEGLIGIBLE. ADDITIONAL CONTAINMENT BMP'S MUST BE IMPLEMENTED, SUCH AS GRAVEL BAGS OR SPECIALLY DESIGNED PLASTIC SKID CONTAINERS AROUND THE BASE, TO PREVENT WASTE FROM CONTRIBUTING TO STORM WATER DISCHARGES. THE LOCATION OF SANITARY WASTE UNITS MUST BE IDENTIFIED ON THE EROSION CONTROL PLAN INTERMEDIATE PHASE BY THE CONTRACTOR, ONCE THE LOCATIONS HAVE BEEN DETERMINED.

SANITARY SEWER WILL BE PROVIDED BY MUNICIPAL AUTHORITY/SEPTIC SYSTEM AT THE COMPLETION OF THIS PROJECT.

NO WASTE WILL BE DISPOSED OF INTO STORM WATER INLETS OR WATERS OF THE STATE.
WASTE MATERIALS - ALL WASTE MATERIALS WILL BE COLLECTED AND STORED IN A SECURELY LIDDED METAL DUMPSTER. THE DUMPSTER WILL MEET ALL SOLID WASTE MANAGEMENT REGULATIONS. ALL TRASH AND CONSTRUCTION DEBRIS FROM THE SITE WILL BE DEPOSITED IN THE DUMPSTER. THE DUMPSTER WILL BE EMPTIED A MINIMUM OF ONCE PER WEEK OR MORE OFTEN IF NECESSARY AND TRASH WILL BE HAULLED AWAY AS REQUIRED BY LOCAL REGULATIONS. NO CONSTRUCTION WASTE WILL BE BURIED ON SITE.

ALL PERSONNEL WILL BE INSTRUCTED ON PROPER PROCEDURES FOR WASTE DISPOSAL. A NOTICE STATING THESE PRACTICES WILL BE POSTED AT THE JOB SITE AND THE CONTRACTOR WILL BE RESPONSIBLE FOR SEEING THAT THOSE PROCEDURES ARE FOLLOWED.

THE DESIGN PROFESSIONAL WHO PREPARED THE ES&P PLAN IS TO INSPECT THE INSTALLATION OF THE INITIAL SEDIMENT STORAGE REQUIREMENTS AND PERIMETER CONTROL BMPS WITHIN 7 DAYS AFTER INSTALLATION

NON-EXEMPT ACTIVITIES SHALL NOT BE CONDUCTED WITHIN THE 25 OR 50-FOOT UNDISTURBED STREAM BUFFERS AS MEASURED FROM THE POINT OF WRESTED VEGETATION OR WITHIN 25 FEET OF THE COASTAL MARSHLAND BUFFER AS MEASURED FROM THE JURISDICTIONAL DETERMINATION LINE WITHOUT FIRST ACQUIRING THE NECESSARY VARIANCES AND PERMITS.

AMENDMENTS/REVISIONS TO THE ES&P PLAN WHICH HAVE A SIGNIFICANT EFFECT ON BMP'S WITH A HYDRAULIC COMPONENT MUST BE CERTIFIED BY THE DESIGN PROFESSIONAL.

WASTE MATERIALS SHALL NOT BE DISCHARGED TO WATERS OF THE STATE, EXCEPT AS AUTHORIZED BY A SECTION 404 PERMIT.

THE ESCAPE OF SEDIMENT FROM THE SITE SHALL BE PREVENTED BY THE INSTALLATION OF EROSION AND SEDIMENT CONTROL MEASURES AND PRACTICES PRIOR TO LAND DISTURBING ACTIVITIES.

EROSION CONTROL MEASURES WILL BE MAINTAINED AT ALL TIMES. IF FULL IMPLEMENTATION OF THE APPROVED PLAN DOES NOT PROVIDE FOR EFFECTIVE EROSION CONTROL, ADDITIONAL EROSION AND SEDIMENT CONTROL MEASURES SHALL BE IMPLEMENTED TO CONTROL OR TREAT THE SEDIMENT SOURCE.

ANY DISTURBED AREA LEFT EXPOSED FOR A PERIOD GREATER THAN 14 DAYS SHALL BE STABILIZED WITH MULCH OR TEMPORARY SEEDING."

CONSTRUCTION SCHEDULE		WEEKS	
ACTIVITY	Start	End	Notes
Erosion Control Impl./Tree Protection	06/17/20	06/17/20	
Demo, Set Basins	06/17/20	06/17/20	
Clear & Fill	06/17/20	06/17/20	
Grassing (Limit exposed to 5 days)	06/17/20	06/17/20	
Utility Installation	06/17/20	06/17/20	
Curbing & Paving	06/17/20	06/17/20	
Building Modifications/As	06/17/20	06/17/20	
Final Grading	06/17/20	06/17/20	
Final Stabilization & L/Scope	06/17/20	06/17/20	

PROJECT START DATE: SEPTEMBER 1, 2017, PROJECT COMPLETION DATE: MARCH 2018
DATES ARE APPROXIMATE AND MAY VARY DUE TO INCLEMENT WEATHER, SITE CONDITIONS, REVISIONS TO PLAN, CONTRACTOR SCHEDULE, ETC.

**24 HR CONTACT
RONNIE THOMPSON
678-409-8237**

GSWCC GEORGIA SOIL AND WATER CONSERVATION COMMISSION
Paul K Hammon
Level II Certified Design Professional
Cert Number: 5748
Issued: 5/8/2018
Expires: 5/8/2021

GEORGIA811
Utilities Protection Center, Inc.
Know what's below. Call before you dig.

OWNER / DEVELOPER:



V&M
Vaughn & Melton
Consulting Engineers, Inc.

300 Chastain Center Blvd. Ste 325
Kennesaw, Georgia 30144
TEL: (770) 827-3550 FAX: (404) 827-3594

V&M Contact:
Paul K. Hammon P.E. (770) 639-7797
KENTUCKY NORTH CAROLINA
606-248-6600 828-253-2786
TENNESSEE SOUTH CAROLINA
865-546-5800 864-574-4775
www.vaughnmelton.com
Copyright © 2013
All Rights Reserved

JONESBORO ROAD
LAND LOT 126
SECTION 7
CITY OF McDONOUGH
HENRY COUNTY GA.



Project Name: JONESBORO ROAD PARK
Project Number: 071920-33
Drawn By: PTJ Ck'd By: PTJ
Date: 06/17/20 Scale: As shown

Rev.	Description:	Date:
1	SUBMIT FOR REVIEW	04/24/2020
2	REVIEWED: ADDED ROAD AND BLANKS REMOVED MANHOLE WITH LANTERN BOX CHANGED RADIUS AND REMOVED SW	05/06/2020
3	REVIEWED: ADDED CURB WITH DELINEATIONS TO JONESBORO RD	05/13/2020
4	REVIEWED: ADDED DELINEATIONS TO QUICK CURB REPLACED EXISTING 18" S&B AND 8" TOP W&H REMOVE EXISTING PIPE IN ROADWAY	05/19/2020
5	REVIEWED: MODIFIED P-BLANK PATH; REMOVE PARKING SPACES; ADDED EXISTING GAS LINES CHANGED CORNER MATCHING ON MICH DR	06/17/2020

NPDES

C-04