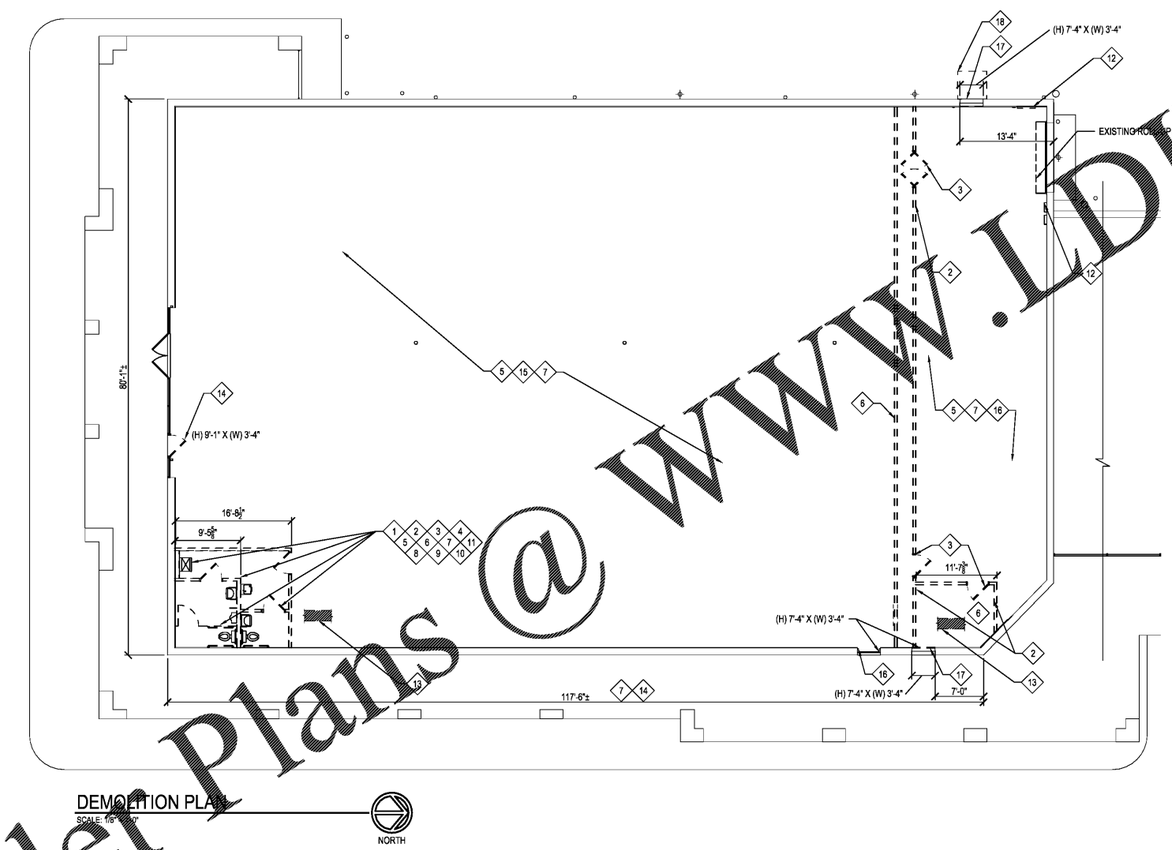

DEMOLITION PLAN
SCALE: 1/8" = 1'-0"

NORTH

DEMOLITION NOTES

1. REMOVE PARTITION COMPLETE.
2. REMOVE PORTION OF EXISTING WALL COMPLETE.
3. REMOVE DOOR AND FRAME COMPLETE.
4. REMOVE EXISTING WALL FIXTURES AND FINISHES COMPLETE.
5. FLOORING CONTRACTOR (TENANT HIRED) SHALL REMOVE EXISTING VCT TILE COMPLETE. GC SHALL NOT INCLUDE IN BID.
6. REMOVE PORTION OF EXISTING ACT AND GRID COMPLETE (EXIST CEILING HEIGHT IS 12'-5" AFF.)
7. REMOVE EXISTING LIGHT FIXTURES COMPLETE.
8. REMOVE EXISTING TOILET FIXTURES AND ACCESSORIES COMPLETE. FOR REMOVAL OF PLUMBING FIXTURES SEE PLUMBING SHEETS.
9. REMOVE EXISTING EWC COMPLETE. FOR REMOVAL OF PLUMBING FIXTURES SEE PLUMBING SHEETS.
10. REMOVE EXISTING MOP SINK COMPLETE. FOR REMOVAL OF PLUMBING FIXTURES SEE PLUMBING SHEETS.
11. REMOVE, CAP, OR FILL EXISTING DRAIN COMPLETE. FOR MODIFICATION OF EXISTING PLUMBING SEE PLUMBING SHEETS.
12. FOR REMOVAL AND RELOCATION OF EXISTING ELECTRICAL PANELS AND TRANSFORMER AS SHOWN IN NEW WORK. REFER TO ELECTRICAL DRAWINGS.
13. REMOVE PORTION OF EXISTING CONCRETE SLAB AS REQUIRED TO TRENCH FLOOR FOR RELOCATION OF PLUMBING FIXTURES. CONTRACTOR SHALL INCLUDE IN BID ALL TRENCHING REQUIRED TO EXTEND PLUMBING IN NEW WORK. (CONTRACTOR SHALL AVOID SALES FLOOR IF POSSIBLE.)
14. REMOVE EXIST STOREFRONT DOOR, AND THRESHOLD COMPLETE
15. EXIST ACT & GRID TO REMAIN. REMOVE DAMAGED OR DISCOLORED TILE AS REQUIRED.
16. REMOVE EXISTING HARDWARE (EXCEPT HINGES).
17. REMOVE PORTION OF EXTERIOR MASONRY WALL TO 8" BELOW FINISHED FLOOR AS INDICATED FOR INSTALLATION OF DOOR IN NEW WORK. REFER TO STRUCTURAL DRAWINGS.
18. REMOVE PORTION OF EXIST ASPHALT FOR INSTALLATION OF CONCRETE PAD IN NEW WORK. REFER TO STRUCTURAL DRAWINGS.

Order Plans @ WWW.LDILine.com

mark	date	by	description
revisions			

date	01/05/2021
project	21108-08
designed	KBH
drawn	KBH
checked	DAE

RRMM
ARCHITECTS, PC
Robert S Berz, Jr, Architect
Duane M Harver, Architect
1317 Executive Blvd, Suite 200
Chesapeake, VA 23320
(757)622-2828 / fax (757)622-6883

STATE OF GEORGIA
DUANE M. HARVER
CERTIFICATE NO. 21108-10
REGISTERED ARCHITECT

project
DOLLAR TREE
NORTHSIDE PLAZA, DEAL #12293
DALTON, GA
DEMOLITION PLAN
drawing

sheet
D1