


STAGE 4:
 REMOVE CONFLICTING STAGE 3 TEMP STRIPING, PVMT MARKINGS & SIGNS.
 INSTALL STAGE 4 TEMP STRIPING, PVMT MARKINGS & SIGNS.
 SHIFT ALL KIA PKWY SIGNAL HEADS TO PERMANENT POSITIONS.
 SHIFT EB & WB TRAFFIC TO STAGE 4 LOCATIONS.
 INSTALL TRAFFIC CONTROL DEVICES PER MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES, CURRENT EDITION, AND GDOT STDS.
 CONSTRUCT PROP RAISED CONCRETE MEDIAN @ DRAINAGE.
 MAINTAIN ACCESS TO ALL DRIVEWAYS.

STAGE 5:
 MILL AND INLAY FINAL SURFACE COURSE (12.5MM).
 INSTALL PERMANENT SIGNING AND MARKING UNDER NIGHT TIME LANE CLOSURES.

ESA - SEE ENVIRONMENTAL RESOURCES IMPACT TABLE
 GENERAL NOTES FOR CONSTRUCTION RESTRICTIONS

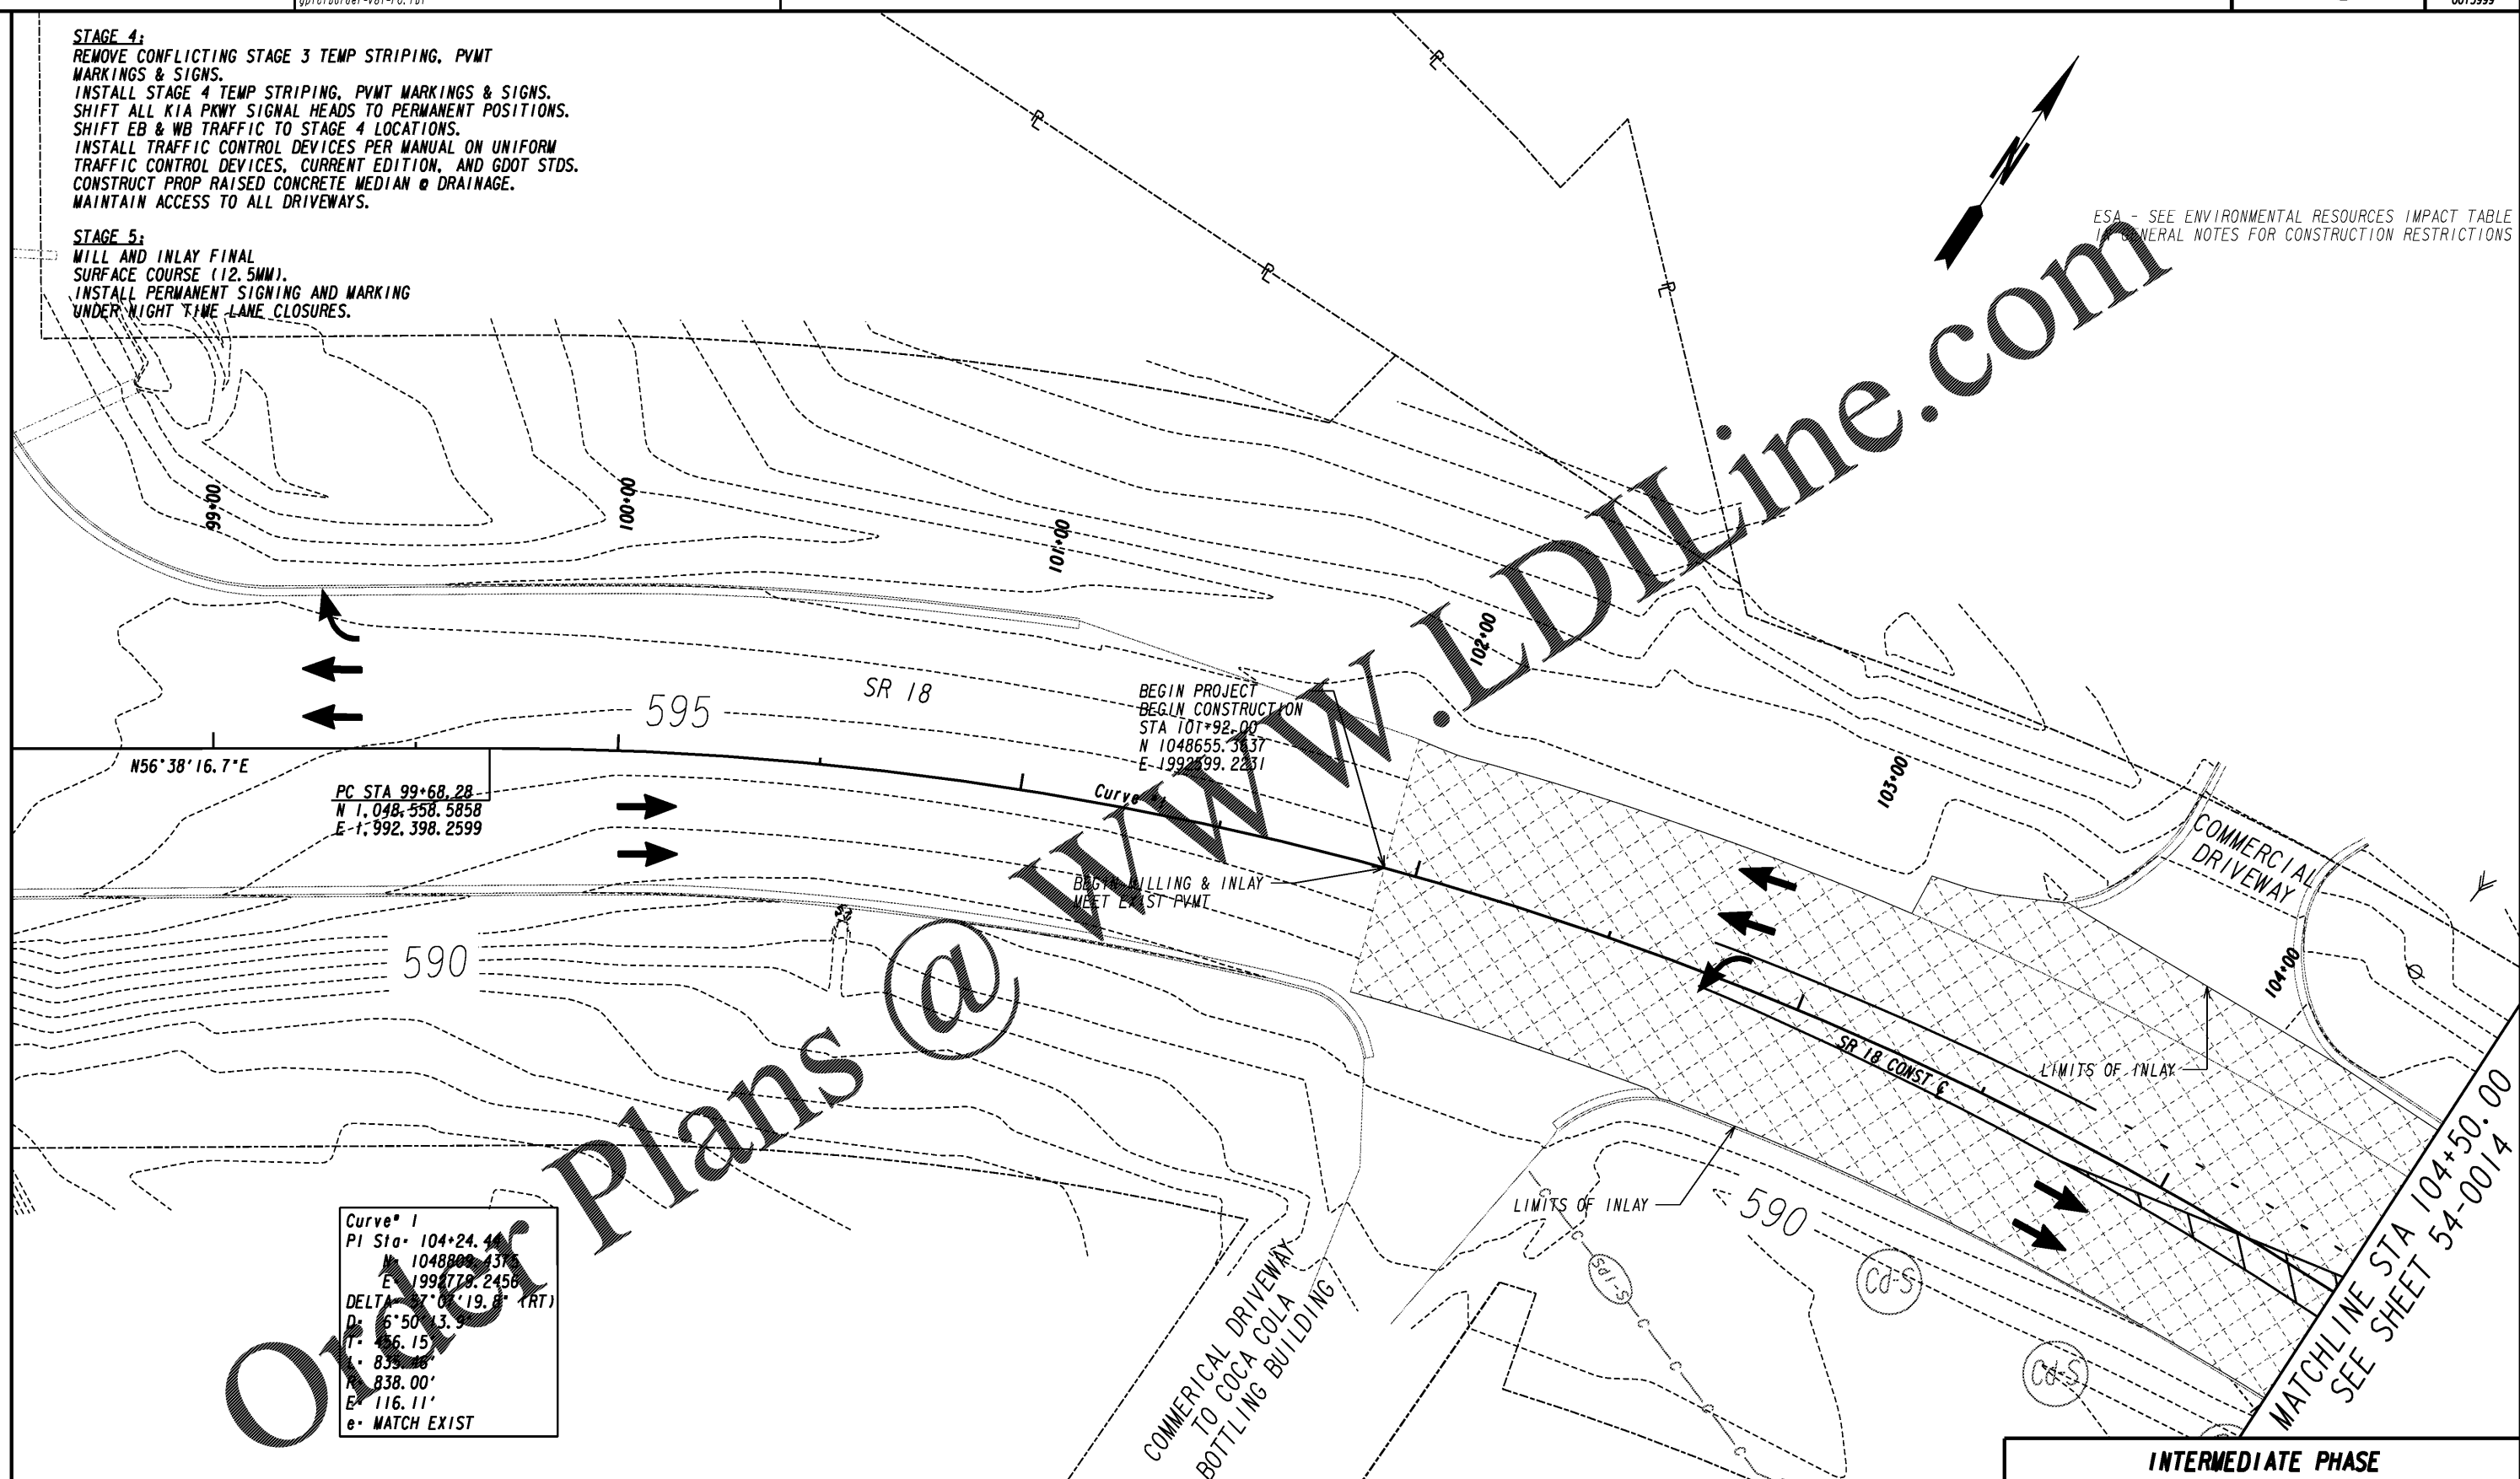

N56°38'16.7"E
 PC STA 99+68.28
 N 1,048,558.5858
 E -1,992,398.2599

BEGIN PROJECT
 BEGIN CONSTRUCTION
 STA 101+92.00
 N 1048655.3637
 E -1992499.2231

Curve 1
 PI Sta 104+24.40
 N 1048800.1316
 E 1992778.2458
 DELTA 7°07'19.8" (RT)
 D= 6°50'13.9"
 L= 859.28'
 T= 838.00'
 E= 116.11'
 e= MATCH EXIST

Plans @

WWW.LDILine.com

MATCHLINE STA 104+50.00
 SEE SHEET 54-0014

PROPERTY AND EXISTING R/W LINE
 REQUIRED R/W LINE
 CONSTRUCTION LIMITS
 EASEMENT FOR CONSTR & MAINTENANCE OF SLOPES
 EASEMENT FOR CONSTR OF SLOPES
 EASEMENT FOR CONSTR OF DRIVES

BEGIN LIMIT OF ACCESS.....BLA
 END LIMIT OF ACCESS.....ELA
 LIMIT OF ACCESS
 REQ'D R/W & LIMIT OF ACCESS
 ORANGE BARRIER FENCE
 ESA - ENV. SENSITIVE AREA
 (SEE ERIT TABLE)

INFRASTRUCTURE
 CONSULTING & ENGINEERING
 4940 PEACHTREE INDUSTRIAL BLVD., SUITE 310
 NORCROSS, GEORGIA 30071



REVISION DATES	

INTERMEDIATE PHASE		
BMP LOCATION DETAILS		
SR 18 BRIDGE REPLACEMENT @ LONG CAME CREEK		
TROUP COUNTY		
STAGE 4/5 STA 101+92.00 TO STA 104+50.00		
CHECKED:	DATE:	DRAWING No.
BACKCHECKED:	DATE:	54-0013
CORRECTED:	DATE:	
VERIFIED:	DATE:	