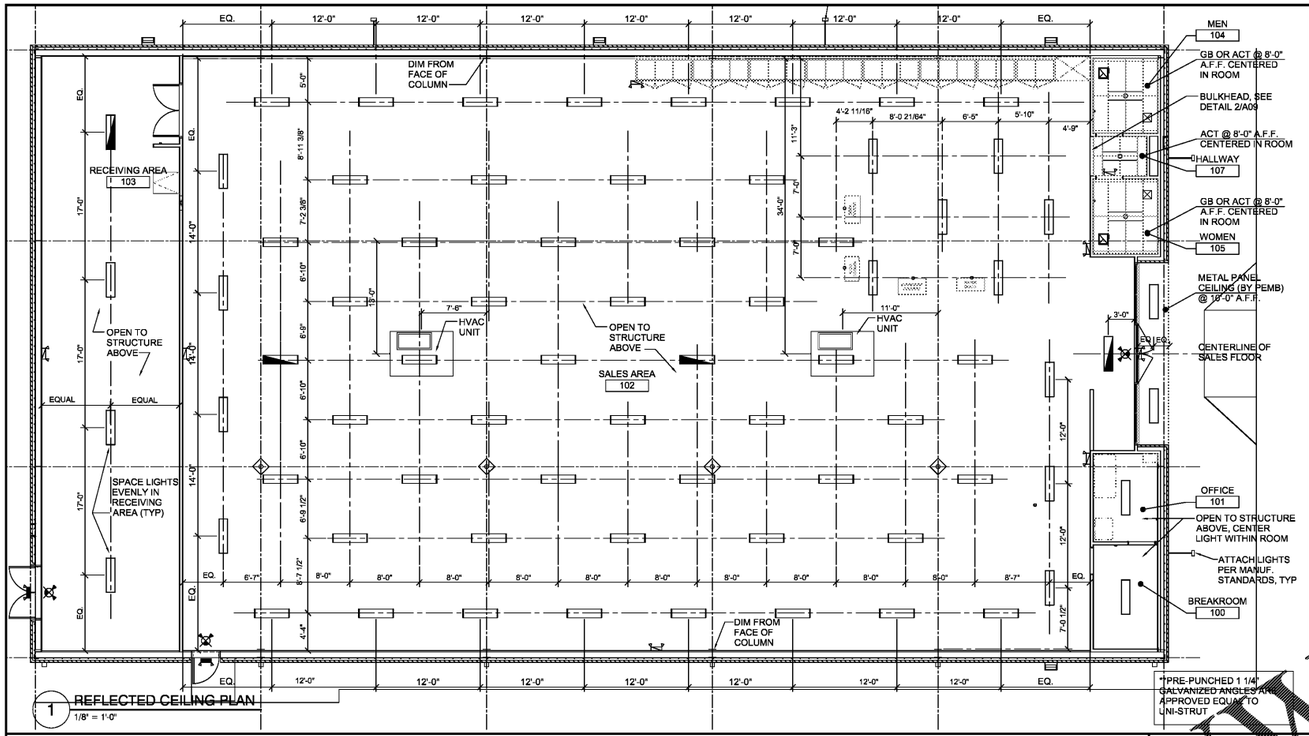

1 REFLECTED CEILING PLAN
1/8" = 1'-0"

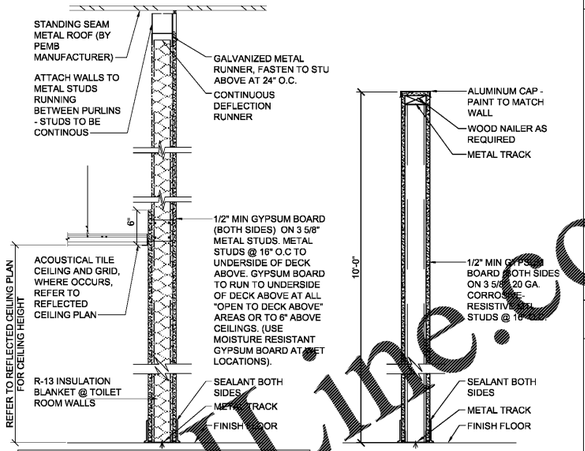

4 FULL HEIGHT WALL DETAIL
1" = 1'-0"

5 PARTIAL HEIGHT WALL DETAIL
1" = 1'-0"

LEGEND

4' STRIP LIGHT	WALL PACK
NIGHT LIGHT CIRCUIT	EXHAUST FAN
EMERGENCY LIGHT	SUPPLY AIR DIFFUSER
EMERGENCY LIGHT & EXIT COMBO	TRANSFER GRILLE
	EXT. LED LIGHT AND EXT ARM

** REFER TO THE ELECTRICAL DRAWINGS FOR LIGHT DESIGNATIONS AND OTHER ADDITIONAL INFORMATION

REFLECTED CEILING PLAN NOTES

1. ALL LIGHTS TO BE MOUNTED SUCH THAT THE TOP OF THE FIXTURES ARE AT 11'-0" A.F.F. REFER TO ELECTRICAL DRAWINGS FOR ADDITIONAL INFORMATION.
2. CABLE TRAY TO BE MOUNTED SUCH THAT BOTTOM OF TRAY IS AT 11'-6" A.F.F.
3. CABLE TRAY SYSTEM TO BE INSTALLED USING FULL LENGTHS WITH MINIMAL CUTTING OF SECTIONS .AREAS WHERE CUTTING MAY BE REQUIRED ARE AS NOTED ON THE PLAN.
4. GENERAL CONTRACTOR SHALL PROVIDE AND INSTALL CABLE TRAY AND ALL CONDUIT WITH PULL STRINGS AS NOTED.

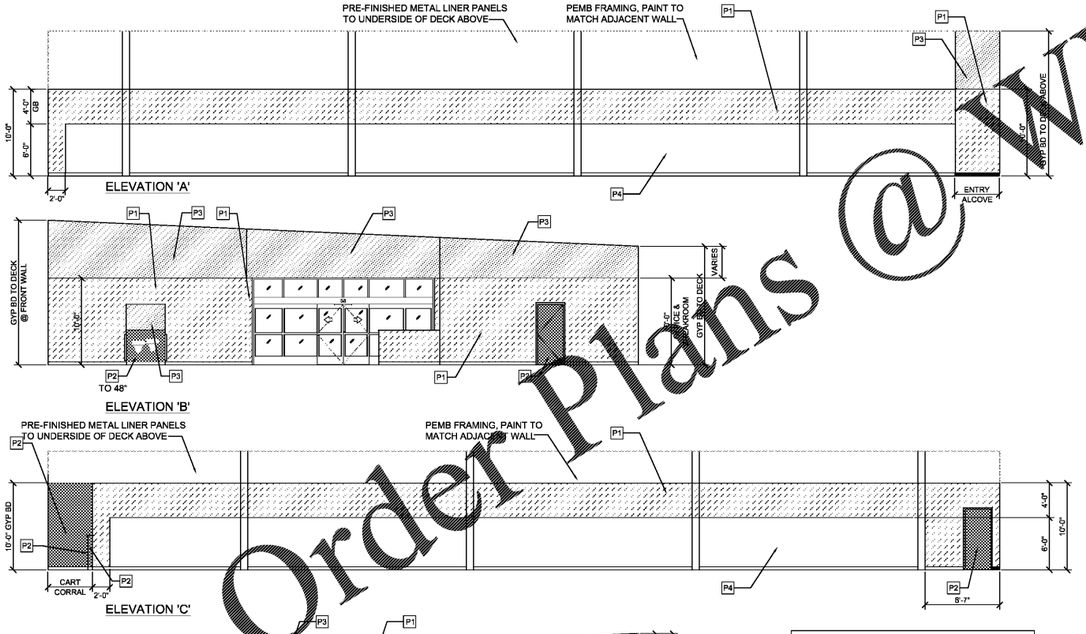

2 INTERIOR ELEVATIONS
1/4" = 1'-0"

WALL PAINT LEGEND

P1	SW7065 "ARGOS"
P2	SW6991 "BLACK MAGIC"
P3	SW7005 "PURE WHITE"
P4	EXPOSED LINER PANEL
P5	DENOTES GYPSUM BOARD, TAPED AND MUDDED ONLY

NOTE:
PAINT EXPOSED STRUCTURE SW7005 PURE WHITE

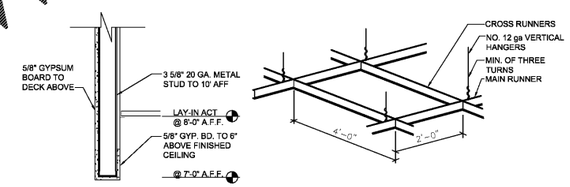

3 CEILING DETAILS
N.T.S.

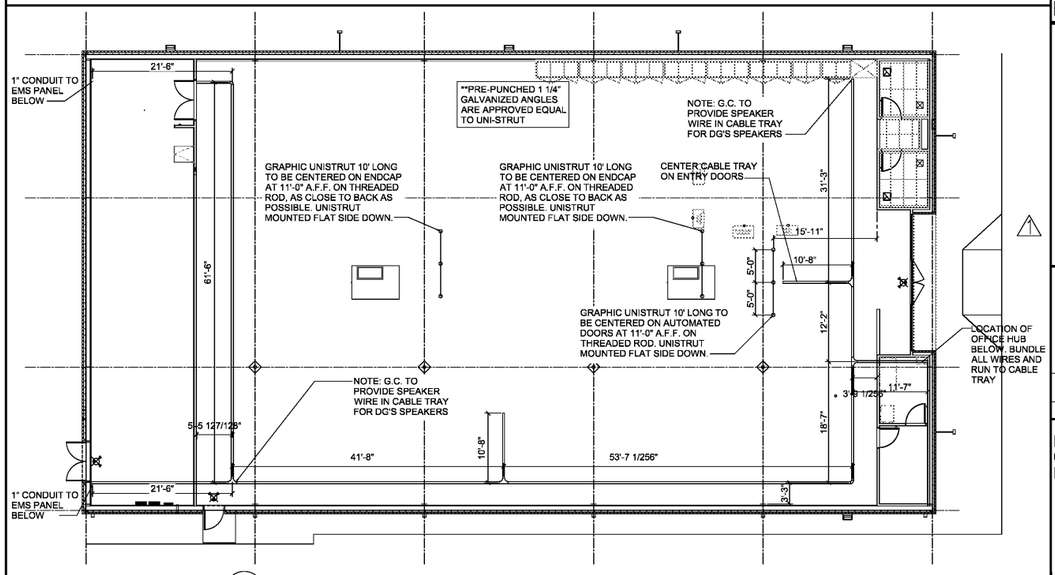

6 CABLE TRAY PLAN
3/32" = 1'-0"

Order Plans @ www.LDLine.com

ROBERT E. WALKER IV
CERTIFICATE NO. 32315
STATE OF GEORGIA
02/04/2021

Robert E. Walker, IV
Architect
2229 FIRST AVE. SOUTH
SUITE 110
BIRMINGHAM, Alabama
35233
T-205.254.3212
F-205.254.3269

County Comments 02/04/21
REVISIONS

DOLLAR GENERAL BUILDING
Prototype 9100 SF B
Store # 22718

DG Woodstock
6721 Bells Ferry Rd.
Woodstock, GA 30189

CONSTRUCTION DOCUMENTS

PROJECT NO.: 8095.97
ISSUED: 01/15/2021

REFLECTED CEILING PLAN
INTERIOR ELEVS

A1.1