


| DRAWING ISSUE RECORD | | |
|----------------------|--------------|-----|
| DATE | REVISION | NO. |
| 4-8-2021 | ISSUE TO BID | |


Ds1 Ds2 Ds3 Du FI-Co
 CONTRACTOR SHALL STABILIZE ALL DISTURBED AREAS AS REQUIRED BY CONTRACT DOCUMENTS AND LOCAL GOVERNING REGULATIONS. (PROVIDE LISTED BMP'S ABOVE OVER ENTIRE SITE 8" TO 4" AP(TYP) MAXIMATE DIRECTION UNABLE TO LOCATE TERMINUS (SEE NOTE A)

BREEDLOVE LAND PLANNING
 Landscape Architects • Civil Engineers
 www.landplanning.net
 BLP JOB# 18160

APPROXIMATE DIVERSION #1
 1% C PER P

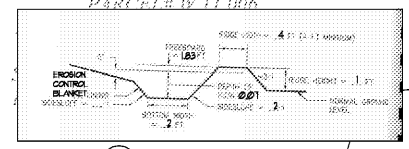


APPROXIMATE DIVERSION #2

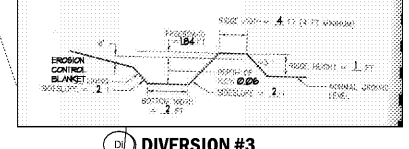

APPROXIMATE DIVERSION #3

GSWCC LEVEL 2 CERTIFICATIONS

I CERTIFY UNDER PENALTY OF LAW THAT THIS PLAN WAS PREPARED AFTER A SITE VISIT TO THE LOCATIONS DESCRIBED HEREIN BY ME OR MY AUTHORIZED AGENT UNDER MY SUPERVISION.
 I CERTIFY THAT THE PERMITTEE'S EROSION, SEDIMENTATION AND POLLUTION CONTROL PLAN PROVIDED FOR AN APPROPRIATE AND COMPREHENSIVE SYSTEM OF BEST MANAGEMENT PRACTICES REQUIRED BY THE GEORGIA WATER QUALITY CONTROL ACT AND THE DOCUMENT MANUAL FOR EROSION AND SEDIMENT CONTROL IN GEORGIA. I AM NOT PROVIDING FOR THE PROVISIONS FOR THE BARRIERS OF THE RECEIVING WATERBODIES OR THE SAMPLING OF THE STORMWATER OUTFALLS AND THAT THE DRAINAGE SYSTEM OR BEST MANAGEMENT PRACTICES AND BARRIERS ARE DESIGNED TO MEET THE REQUIREMENTS CONTAINED IN THE GEORGIA WATER PERMIT NO. GA0000000000.
 SIGNED: *[Signature]* DATE: 04-08-2021
 CERTIFIED PROFESSIONAL, P.L.L.C. MEMBER
 GSWCC CERTIFICATION NO. LEVEL 2 # 0000000001
 EXPIRATION DATE: 01-01-2025
 COMPANY: BREEDLOVE LAND PLANNING, INC.



JUSTIFICATION FOR LACK OF SD3 BMPs

SD3 WHICH WITH-DRAW WATER FROM THE SURFACE, ARE NOT UTILIZED ON THIS PROJECT AS THE DRAINAGE AREA FOR EACH RESPECTIVE BASIN IS RELATIVELY SMALL. EQUIVALENT MEASURES ARE PROVIDED.
 ADDING BARRIER TO ABOVE GROUND BMP AND SOFT-EXCAVATED TRAP ADEQUATELY TREATS THE DRAINAGE AREA AND PROVIDES 61 CT OF SEDIMENT STORAGE PER ACRE DRAINED.

HYDROSEEDING NOTE

ALL LAWN AREAS SHALL BE SEEDING WITH KENTUCKY 31 FESCUE (TEMPORARY) OR HILLED BERTHA (PERMANENT). APPLY FESCUE AT THE RATE OF FIVE (5) POUNDS PER ONE THOUSAND (1000) SQUARE FEET OR APPLY BERTHA AT THE RATE OF FIVE (5) POUNDS PER ONE THOUSAND (1000) SQUARE FEET. ALL DISTURBED AREAS SHALL BE PLANTED WITH A HYDRO-SEEDER AFTER AREAS HAVE BEEN PREPARED FOR SEEDING. SEEDING SHALL BE PERFORMED BY HYDRO-SEEDING OR APPROVED EQUIPMENT MANUFACTURED BY PROFILE PRODUCTS CO. SHALL BE APPLIED AT THE RATE OF ONE THOUSAND FIVE HUNDRED (1500) POUNDS PER ACRE ON FLAT SURFACES. TOP THIRDS (1000) POUNDS PER ACRE ON SLOPES UP TO 30% HORIZONTAL. 10% HORIZONTAL AND TWO THIRDS (1000) POUNDS PER ACRE ON SLOPES GREATER THAN 30% TO 50%. APPLY SEED FERTILIZER, LIME AND FIBER IN ONE OPERATION. EXISTING TREES AND SHRUBS IN HYDRO-SEEDING AREA SHALL BE PROTECTED DURING HYDROSEEDING.

EROSION NARRATIVE

THE CONTRACTOR SHALL INITIAL INITIAL PERMITTER CONTROL (BMPs) (BILT FENCE) COPPOST BILT FENCE, POND WITH BARRIER, 4. CONSTRUCTION EXIT FROM TO THE AREA BASED ON THIS PLAN UNTIL THE INITIAL INSPECTION HAS OCCURRED AND INSTALLATION OF THE INITIAL BMPs HAS BEEN APPROVED. AFTER INITIAL BMPs HAVE BEEN APPROVED ALL OTHER LAND DISTURBING ACTIVITIES THAT CORRECTIVE CONTRACTOR SHALL MAINTAIN AND ALL INITIAL BMPs AND TRANSITION SITE TO INTERMEDIATE BMPs (SILT COATS) AS PHASING REQUIRES.

INTERMEDIATE EROSION SUMMARY

MAINTAIN ALL PREVIOUSLY INSTALLED BMPs AS REQUIRED. PERFORM PHASE GRADING, CONSTRUCT DRIVE, WALLS, AND SET FINAL STORM STRUCTURE (POND). CONTINUE TO PROVIDE SEDIMENT STORAGE BY INITIAL INSPECTION AND SOFT-EXCAVATED TRAP AND BARRIER. UPON APPROVAL OF INTERMEDIATE BMPs, MOVE INTO PHASE 3 CONSTRUCTION AND MAINTAIN ALL INITIAL BMPs AND TRANSITION SITE TO INTERMEDIATE BMPs (SILT COATS) AS PHASING REQUIRES.

GENERAL EROSION NOTES

- NOTIFY CITY/COUNTY INSPECTORS 24 HOURS BEFORE BEGINNING OF EVERY CONSTRUCTION PHASE.
- ALL BARRIERS AND TREE SAVE AREAS SHALL BE CLEARLY IDENTIFIED BY FLAGGING AND/OR FENCING PRIOR TO COMMENCEMENT OF ANY LAND DISTURBANCE.
- THE INSTALLATION OF EROSION AND SEDIMENTATION CONTROL MEASURES AND PRACTICES SHALL OCCUR PRIOR TO OR CONCURRENT WITH ALL DISTURBING ACTIVITIES AND CONSTRUCTION ON THE SITE AND MAINTAINED UNTIL PERMITTER GROUNDCOVER IS ESTABLISHED.
- ALL SEDIMENT BARRIERS SHALL BE INSTALLED PRIOR TO ANY GRADING.
- SEDIMENT BARRIER DEVICES SHALL BE INSPECTED AND REPAIRED OR DAMAGED DAILY. ANY ADDITIONAL SEDIMENT SHALL BE REMOVED AND SPREAD ON SITE.
- ALL DISTURBED AREAS SHALL BE GRASSED AS SOON AS CONSTRUCTION PHASE PERMITS.
- EROSION AND SEDIMENTATION CONTROL MEASURES SHALL BE MAINTAINED AT ALL TIMES. ADDITIONAL EROSION AND SEDIMENTATION CONTROL MEASURES SHALL BE INSTALLED IF DEEMED NECESSARY BY ON-SITE INSPECTION OR AS REQUIRED BY CITY/COUNTY AT NO ADDITIONAL COST TO THE OWNER.
- MAINTENANCE OF ALL SOE EROSION AND SEDIMENTATION CONTROL MEASURES AND PRACTICES, WHETHER TEMPORARY OR PERMANENT, SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR.
- ANY DISCREPANCY BETWEEN THIS SHEET AND OTHERS IN THIS SET SHALL BE REFERRED TO THE ARCHITECT BY THE CONTRACTOR FOR CLARIFICATION BEFORE PROCEEDING WITH THE WORK.
- SEDIMENT STORAGE LEVEL MARKERS MUST BE INSTALLED IN SEDIMENT STORAGE STRUCTURES, INDICATING THE 10% FULL VOLUME.
- PROPERTY OR ON-HILL SLOPES IS 0.5% HORIZONTAL TO 10% VERTICAL.
- CONTRACTOR SHALL PROVIDE TEMPORARY DOWN DRAINS ON HILL SLOPES TO PREVENT FLOODING PRIOR TO STABILIZATION.
- CONTRACTOR SHALL REMOVE ACCUMULATED SEDIMENT FROM DETENTION BASIN AT END OF CONSTRUCTION WHEN ALL DISTURBED AREAS HAVE BEEN FULLY STABILIZED.
- THE ESCAPE OF SEDIMENT FROM THE SITE SHALL BE PREVENTED BY THE INSTALLATION OF EROSION AND SEDIMENT CONTROL MEASURES AND PRACTICES PRIOR TO ALL DISTURBING ACTIVITIES.
- EROSION CONTROL MEASURES SHALL BE MAINTAINED AT ALL TIMES. IF FULL PRE-VENTION OF THE APPROVED PLAN DOES NOT PROVIDE FOR EFFECTIVE EROSION CONTROL, ADDITIONAL EROSION AND SEDIMENT CONTROL MEASURES SHALL BE INSTALLED TO CONTROL OR TREAT THE SEDIMENT SOURCE AT NO ADDITIONAL COST TO THE OWNER.
- ANY DISTURBED AREA LEFT EXPOSED FOR A PERIOD GREATER THAN 14 DAYS SHALL BE STABILIZED WITH MULCH OR TEMPORARY SEEDING.

24-HOUR EROSION CONTACT


CONTACT NAME: BREEDLOVE LAND PLANNING
 CONTACT TITLE: DIRECTOR OF FACILITIES
 REPRESENTING OFFICE: COMMERCIAL SCHOOLS
 PHYSICAL ADDRESS: 3100 GLENWOOD ROAD, SUITE 100
 PHONE NUMBER: 404-391-7282

GRAPHIC SCALE & ORIENTATION



CALL BEFORE YOU DIG

GEORGIA811
 www.Georgia811.com
 GEORGIA LAW MANDATES THAT, BEFORE BEGINNING ANY MECHANIZED DIGGING OR EXCAVATION WORK, YOU MUST CONTACT GEORGIA 811 BY USING EREQUIST ON WEDNESDAY OR BY CALLING 811 FROM 8:00 AM TO 5:00 PM AT (770) 481-4818 BUT NO MORE THAN 15 WORKING DAYS IN ADVANCE TO HAVE UTILITY LINES MARKED.



INTERMEDIATE EROSION CONTROL PLAN
 ADDITION TO COLHAM FERRY
 ELEMENTARY SCHOOL
 181 COLHAM FERRY ROAD WATSONVILLE, GA 30611
 OCONEE COUNTY BOARD OF EDUCATION
 1000 W. WASHINGTON STREET
 WATSONVILLE, GA 30611
 DATE: DECEMBER 15, 2020
 JOB NO: BIL-2001-26
 DATE: 12/15/20
 DRAWN BY: JCH
 CHECKED BY: TMS

cunningham, forhand, matthews & moore, architects, inc. - 2011 manchester street, n.e. - atlanta, georgia 30324 - phone (404) 873-2152
Matthews & Moore
 C4.20