SCHEDULE-AMENTITY WALL FINISH

KEY NAME	DESCRIPTION	MANUFACTURER	STYLE/MODEL #	COLOR/FINISH	LOCATION	COMMENTS	MATERIAL COST	CONTACT
LAMINATE								
LAM-1	METAL LAMINATE	LAMINART	METAL-ART / POLISHED HEMATITE 635	GLAZED	FIREPLACE DECORATIVE HOOD BUILD OUT	SEE ELEVATIONS FOR DESIGN DETAILS	$9.73 / SF	DAVID MAY 770.527.2466
LAM-2	LAMINATE	WILSONART	PREMIUM LAMINATE / 820BK-16	FAWN CYPRESS / CASUAL RUSTIC FINISH	FITNESS AMENITY RESTROOM PARTITIONS		$2.00 / SF	DAVID MAY 770.527.2466
MURAL								
MUR-1	PAINTED WALL MURAL	BUCKHEAD MURALS	PAINTED DRAGONFLIES TO MATCH INSPIRATION IMAGE PROVIDED TO ARTIST BY DESIGNER	DRAGONFLIES PAINTED PT-5	CLUB ROOM	ARTIST QUOTE REFERENCE: DRAGONFLIES MURAL 8' X 10'	$650.00	LENIA CASTRO 404.263.7611
MUR-2	PAINTED WALL MURAL	BUCKHEAD MURALS	PAINTED DOG TO MATCH INSPIATION IMAGE PROVIDED TO ARTIST BY DESIGNER	ARTIST TO SPECIFY/PROVIDE ALL PAINT	PET SPA	ARTIST QUOTE REFERENCE: DOG MURAL 7' X 5'	$650.00	LENIA CASTRO 404.263.7611
PAINT								
PT-1	PAINT FIELD	SHERWIN WILLIAMS	EMERALD INTERIOR ACRYLIC LATEX	SW 7646 FIRST STAR / SATIN	THROUGHOUT			MATTHEW HEALD 404.323.2263
PT-2	PAINT TRIM/DOORS	SHERWIN WILLIAMS	EMERALD URETHANE TRIM ENAMEL	SW 7646 FIRST STAR / SATIN	THROUGHOUT			MATTHEW HEALD 404.323.2263
PT-3	PAINT FIELD CEILINGS	SHERWIN WILLIAMS	EMERALD INTERIOR ACRYLIC LATEX	SW 7006 EXTRA WHITE / SATIN	GWB CEILINGS U.N.O.			MATTHEW HEALD 404.323.2263
PT-4	PAINT ACCENT	SHERWIN WILLIAMS	EMERALD INTERIOR ACRYLIC LATEX	SW 6994 GREENBLACK / SATIN	OFFICES / KITCHEN SOFFIT / FITNESS RESROOM WET WALLS ABOVE TILE			MATTHEW HEALD 404.323.2263
PT-5	PAINT FOR CABINETS	SHERWIN WILLIAMS	EMERALD URETHANE TRIM ENAMEL	SW 6237 DARK NIGHT / SATIN	KITCHEN CABINETS	SUBMIT SAMPLE OF PAINTED CABINET FOR DESIGNER APPROVAL		MATTHEW HEALD 404.323.2263
PT-6	PAINT ACCENT	SHERWIN WILLIAMS	EMERALD INTERIOR ACRYLIC LATEX	SW 9141 WATERLOO / SATIN	CONFERENCE			MATTHEW HEALD 404.323.2263
PT-7	PAINT ACCENT	SHERWIN WILLIAMS	EMERALD URETHANE TRIM ENAMEL	SW 6992 INKWELL / SATIN	KITCHEN BOOTH & FIREPLACE BENCHES			MATTHEW HEALD 404.323.2263
PT-8	PAINT ACCENT	ZOLATONE	FLEX PURE EGGSHELL 100% ACRYLIC COATING / SCRUB RATING 3000	TO MATCH SW 6237 DARK NIGHT	KITCHEN SPECIFIED WALL	SUBMIT SAMPLE FOR DESIGNER APPROVAL		MAUREEN DUNDAKER 404.432.1016
PT-9	PAINT EXTERIOR	SHERWIN WILLIAMS	EXTERIOR SUPERPAINT FLAT LATEX	SW 7006 EXTRA WHITE / SATIN	FITNESS AMENITY CORRIDOR CEILING			MATTHEW HEALD 404.323.2263
PT-10	PAINT ACCENT	SHERWIN WILLIAMS	EMERALD INTERIOR ACRYLIC LATEX	SW 0032 NEEDLEPOINT NAVY / SATIN	CLUB RESTROOM WET WALLS ABOVE TILE	SEE ELEVATIONS		MATTHEW HEALD 404.323.2263
PT-11	PAINT ACCENT	SHERWIN WILLIAMS	EMERALD INTERIOR ACRYLIC LATEX	SW 9143 CADET / SATIN	MAIL/COFFEE BAR PERIMETER BUMPED OUT MAILBOX WALLS	SEE ELEVATIONS, SECTIONS AND 3D VIEWS		MATTHEW HEALD 404.323.2263
SKIM COAT CONCRETE								
CON-1	SKIM COAT CONCRETE	ROSALIA	SUPER FINE CREMA / MICROTOPPING	WHITE W/ DYE / COLOR MIXED TO MATCH SW 7640 SILVERPLATE	LOBBY/MAIL "COLUMN" BUMP OUTS / CLUBROOM FIREPLACE HEARTH	FINISH TO BE APPROVED BY DESIGNER IN FIELD		STACY/BART 888.824.2383
SOLID SURFACE								
SS-2	DEKTON	COSENTINO	INDUSTRIAL COLLECTION / 0.8 CM THICKNESS VARIOUS SIZE SLABS	TRILIUM	KITCHEN - BACK OF BOOTH	SEE ELEVATIONS FOR DETAILS	$28.00 / SF	MELISSA KOSTENKO 470.388.9543
THIN BRICK								
BR-1	THIN BRICK & MORTAR	MERIDIAN BRICK	AUTHENTIC BRICK / AUGUSTA COLLECTION	CAPERS ISLAND / QUEEN	DIVIDER WALL BETWEEN CLUB ROOM AND GAME ROOM & ALL SURFACES INSIDES ARCHWAY	INCLUDE CORNER PIECES / MORTAR: ARGOS MASONRY CEMENT - MAGNOLIA MASON'S MIX	$6.50 - $7.50 / SF	NELSON BOURDAGE 678.230.0417
TRANSITION STRIP								
TR-1	TRANSITION STRIP	SCHLUTER	JOLLY FINISHING AND EDGE PROTECTION	AT5 SATIN NICKEL ANODIZED ALUMINUM	USE AT ALL TILED WALL CORNERS AND UNFINISHED EDGES THROUGHOUT U.N.O.			
TR-2	TRANSITION STRIP	SCHLUTER	JOLLY FINISHING AND EDGE PROTECTION	AGRB BRUSHED GRAPHITE ANODIZED ALUMINUM	USE AT ALL TILES WALL CORNERS AND UNFINISHED EDGES IN MAIL/COFFEE LOUNGE			
TR-3	TRANSITION STRIP	SCHLUTER	JOLLY FINISHING AND EDGE PROTECTION	AKG POLISHED COPPER ANODIZED ALUMINUM	USE AT TRANSITION BETWEEN WALL TILE AND PAINTED DRYWALL ON CLUB RESTROOM WET WALLS	SEE ELEVATIONS FOR DETAILS		
WALL TILE								
WT-1	CERAMIC TILE	TILEBAR	ANGELA HARRIS - DUNMORE / 8" X 8"	VECCHIO DECOR / POLISHED / GROUT: BOSTIK H196 LUNAR	LOBBY FEATURE WALL	SEE ELEVATIONS FOR TILE LAYOUT	$5.50 / SF	LIZ ALLEN 540.830.2533
WT-2	CERAMIC TILE	TILEBAR	ANGELA HARRIS - DUNMORE / 8" X 8"	BLU / POLISHED / GROUT: BOSTIK H196 LUNAR	LOBBY FEATURE WALL	SEE ELEVATIONS FOR TILE LAYOUT	$3.13 / SF	LIZ ALLEN 540.830.2533
WT-3	PORCELAIN TILE	LEVANTINA	TECHLAM / INDUSTRIAL COLLECTION / 39.4"W X 117"W	STEEL CHROME / NATURAL / GROUT: MAPEI #09 GRAY	MAIL / COFFEE LOUNGE	SEE ELEVATIONS FOR TILE LAYOUT & SPECIFIED WALLS / INSTALLED VERTICALLY - STRAIGHT SET	$7.95 / SF	JILL FEDIE 470.391.0894
WT-4	CERAMIC TILE	ARCHITECTURAL CERAMICS	DIESEL RIBBED OXIDE / 4" X 8"	METAL BURNISH / GLOSSY / GROUT: BOSTIK H151 TAUPE	MAIL / COFFEE LOUNGE	STRAIGHT SET INSTALLATION	$5.25 / SF	JILL FEDIE 470.391.0894
WT-5	CERAMIC TILE	TILE BAR	NABI ARGYLE / 6" X 6"	TUNDRA / POLISHED / GROUT: #77 FROST	KITCHEN ISLAND (2 WALLS)	INSTALL STACKED AND STRAIGHT SET - ALL IN THE SAME DIRECTION	$10.93 / SF	LIZ ALLEN 540.830.2533
WT-6	PORCELAIN TILE	SPECIALTY TILE	RONDINE / LONDON / 2.5" X 10"	MULTICOLOR / GROUT: MAPEI #01 ALABASTER	YOGA/FITNESS ON DEMAND		$4.65 / SF	LISA CASEY 678.462.2318
WT-7	NOT USED	NOT USED	NOT USED	NOT USED	NOT USED	NOT USED	NOT USED	
WT-8	CERAMIC TILE	CROSSVILLE STUDIOS	CRAYONS / 3" X 12"	SMOKE / POLISHED / GROUT: MAPEI #77 FROST	CLUBHOUSE AMENITY RESTROOMS - SINK WALLS ONLY	SEE ELEVATION FOR TILE LAYOUT	$6.36 / SF	ABBEY GIBBONEY 770.380.0398
WT-9	CERAMIC TILE	CROSSVILLE STUDIOS	CRAYONS / 3" X 12"	BRIGHT WHITE / POLISHED / GROUT: MAPEI #77 FROST	CLUBHOUSE AMENITY RESTROOMS - SINK WALLS ONLY	SEE ELEVATION FOR TILE LAYOUT	$6.36 / SF	ABBEY GIBBONEY 770.380.0398
WT-10	CERAMIC TILE	CROSSVILLE STUDIOS	CRAYONS / 3" X 12"	CARAMEL / POLISHED / GROUT: MAPEI #77 FROST	CLUBHOUSE AMENITY RESTROOMS - SINK WALLS ONLY / FITNESS @ MILLWORK	SEE ELEVATION FOR TILE LAYOUT	$6.36 / SF	ABBEY GIBBONEY 770.380.0398
WT-11	CERAMIC TILE	CROSSVILLE STUDIOS	CRAYONS / 3" X 12"	STORM / POLISHED / GROUT: MAPEI #77 FROST	CLUBHOUSE AMENITY RESTROOMS - SINK WALLS ONLY	SEE ELEVATION FOR TILE LAYOUT	$6.36 / SF	ABBEY GIBBONEY 770.380.0398
WT-12	CERAMIC TILE	BEDROSIANS	DECC1LOGRESSG / 5X5 CLOE SQUARE WALL TILE	GREY / GLOSSY / GROUT: MAPEI #103 COBBLESTONE	CLUBHOUSE AMENITY RESTROOMS - TOILET WALLS ONLY	STRAIGHT SET INSTALLATION	$3.20 / SF	MEREDITH COURTS 404.395.3797
WT-13	CERAMIC TILE	MSI	NWHIGLO3X6INVBEV / 3X6 INVERITED BEVEL	WHITE / GLOSSY / GROUT: BOSTIK #152 WHITE	WORK ROOM / MODEL UNIT ROOM		$1.68 / SF	DENISE LAMACHE 470.378.6840
WT-14	PORCELAIN TILE	SPECIALTY TILE	MARVEL PRO / 18" X 36"	STATUARIO / POLISHED / GROUT: MAPEI #77 FROST	FITNESS AMENITY RESTROOMS		$5.68 / SF	LISA CASEY 678.462.2318
WT-15	CERAMIC TILE	TILE BAR	LANCASTER / 3" X 12"	OPEN SEAS / POLISHED / GROUT: MAPEI #77 FROST	FITNESS MILLWORK	STRAIGHT SET VERTICAL INSTALLATION	$5.79 / SF	MEREDITH COURTS 404.395.3797
WT-16	PORCELAIN TILE	TILE BAR	BASIC CEMENT / 2" X 2" MOSAIC	SILVER / MATTE / GROUT: MAPEI #103 COBBLESTONE	PET SPA	SEE ELEVATIONS FOR SPECIFIED WALLS	$4.99 / SF	LIZ ALLEN 540.830.2533
WT-17	CERAMIC TILE	SPECIALTY TILE	FLUX / 4" X 12"	MINT / GLOSSY / GROUT: MAPEI #77 FROST	PET SPA	SEE ELEVATIONS FOR SPECIFIED WALLS / STRAIGHT SET INSTALLATION	$3.65 / SF	LISA CASEY 678.462.2318

SCHEDULE-AMENTITY WALL FINISH

KEY NAME	DESCRIPTION	MANUFACTURER	STYLE/MODEL #	COLOR/FINISH	LOCATION	COMMENTS	MATERIAL COST	CONTACT
WT-18	PORCELAIN TILE	MSI	NCAPWHBRIXTID / BRICKSTONE / 2" X 10"	WHITE / MATTE / GROUT: BOSTIK H152 WHITE	PET SPA	SEE ELEVATIONS FOR SPECIFIED WALLS / BRICK SET INSTALLATION	$3.11 / SF	DENISE LAMACHE 470.378.6840
WALLCOVERING								
WC-1	WALLCOVERING	INNOVATIONS	INNVIRONMENTS WALLCOVERING / GC-109	GILDED CORK - RUSTED	GAME ROOM		$45.95 / LY	MICHELE HATFIELD 404.261.1401
WC-2	WALLCOVERING	BRADLEY	FINE ART WALL MURALS / WT-642	WT-642 / NON-WOVEN VELLUM	FITNESS		$10.00 / SF	CAROLINE MEADOWS 770.670.4253
WC-3	WALLCOVERING	PHILLIP JEFFRIES	VINYL SNAKESKIN / 8027	DESERT PYTHON	CLUBHOUSE AMENITY WATER FOUNTAIN WALL		$25.00 / LY	NICOLE BEERS 678.832.9369
WOOD								
WD-2	RECLAIMED WOOD	BEECH CREEK TIMBER	1X4 RECLAIMED WOOD PIECES - COLOR/SPECIES TBD BY DESIGNER WHEN ORDERING	NATURAL / NEUTRAL SEALANT	KITCHEN ISLAND	SEE PLAN FOR SPECIFIED WALL	$4.50 / SF	BEECH CREEK TIMBER 678.789.4577
WD-3	WOOD WALL TRIM	PER GC	1X1 SQUARE PAINT GRADE WOOD WALL MOLDING	PAINTED PT-4	OFFICES (1 WALL IN EACH)	SEE ELEVATIONS FOR WALL TRIM DESIGN		
WD-4	WOOD WALL TRIM	PER GC	2X2 SQUARE PAINT GRADE WOOD WALL MOLDING	PAINTED PT-4	OFFICES (1 WALL IN EACH)	SEE ELEVATIONS FOR WALL TRIM DESIGN		
WD-5	WOOD WALL TRIM	PER GC	1X1 SQUARE PAINT GRADE WOOD WALL MOLDING	PAINTED PT-6	CONFERENCE (2 WALLS)	SEE ELEVATIONS FOR WALL TRIM DESIGN		
WD-6	WOOD WALL TRIM	PER GC	2X2 SQUARE PAINT GRADE WOOD WALL MOLDING	PAINTED PT-6	CONFERENCE (2 WALLS)	SEE ELEVATIONS FOR WALL TRIM DESIGN		
WD-7	WOOD WALL TRIM	PER GC	2X1 SQUARE STAIN GRADE WHITE OAK	STAINED WS-1	MAILBOX WALLS / CAP FOR WALL TILE IN SPECIFIED LOCATIONS	SEE ELEVATIONS FOR DETAILS / SUBMIT STAINED WOOD SAMPLE FOR DESIGNER APPROVAL		
WD-8	WOOD FRAMES	PER GC	1X4 SQUARE STAIN GRADE WHITE OAK	STAINED WS-1	FRAMES AROUND MAILBOX BLOCKS	SEE ELEVATIONS FOR DETAILS / MITER CORNERS / SUBMIT STAINED WOOD SAMPLE FOR DESIGNER APPROVAL		
WD-9	SHIPLAP	PER GC	1X4 PAINT GRADE SHIPLAP	PAINTED PT-7	KITCHEN BOOTH (3 SIDES)	SEE ELEVATIONS / MITER CORNERS		
WD-10	NOT USED	NOT USED	NOT USED	NOT USED	NOT USED	NOT USED	NOT USED	
WOOD STAIN								
WS-1	WOOD STAIN	PER GC	PER GC	TO MATCH WDV-1 [SEE CEILING FINISH SCHEDULE]		SUBMIT SAMPLE FOR DESIGNER APPROVAL		

WALL FINISH GENERAL NOTES

1. ALL INTERIOR FINISHES ARE IN COMPLIANCE WITH GOVERNING CODES.
2. MATERIALS SHALL BE DELIVERED IN THEIR ORIGINAL CARTONS AS PACKAGED BY THE MANUFACTURER AND MUST BEAR THE ORIGINAL MANUFACTURER'S LABEL(S.) CONTRACTOR WILL BE RESPONSIBLE FOR RECEIVING AND STORING GOODS. MATERIALS STORED ON THE SITE SHALL BE PROTECTED FROM DEBRIS AND DAMAGE. DAMAGED MATERIALS WILL BE REJECTED AND MUST BE REPLACED AT COST TO THE CONTRACTOR.
3. PREPARE/PROVIDE SUBSTRATE AND INSTALL/FINISH ALL MATERIALS ACCORDING TO MANUFACTURER'S SPECIFICATIONS.
4. ALL MISCELLANIOUS GRILLS, PLATES, ETC. OCCURING ON WALLS OR CEILINGS SHALL BE PAINTED TO MATCH THE WALLS ON WHICH THEY OCCUR, UNLESS NOTED OTHERWISE. PRIME ALL METAL SURFACES PRIOR TO PAINTING.
5. ALL PAINTED SURFACES SHALL RECEIVE MANUFACTURER'S RECOMMENDED PRIMER PLUS A MINIMUM OF TWO (2) COATS OF SPECIFIED PAINT/FINISH.
6. CONTRACTOR TO PROVIDE ATTIC STOCK OF ALL PAINT COLORS. VERIFY QUANTITY OF EACH PAINT WITH OWNER PRIOR TO ORDERING MATERIALS (MINIMUM OF ONE (1) GALLON.)
7. ALL WALLS TO RECEIVED WALLCOVERING SHALL BE PREPPED ACCORDING TO MANUFACTURER'S INSTRUCTIONS. WALLCOVERING SHALL NOT HAVE VISIBLE SEAMS OR GLUE AND SHALL NOT TERMINATE AT OUTSIDE CORNERS OR EDGES. COORDINATE WITH DESIGNER IF EDGE MOULDING IS REQUIRED.
8. CONTRACTOR TO SUBMIT FINISH SAMPLES OF ALL MATERIALS TO THE DESIGNER FOR APPROVAL PRIOR TO ORDERING AND/OR INSTALLATION.
9. PROVIDE TWO COATS OF PAINT TO ALL WALLS AND WB CEILINGS THROUGHOUT.
10. PROVIDE 3/16" MIN. GROUT JOINT AT ALL WALL TILE.

WALL FINISH PLAN SYMBOL LEGEND

WX — FINISH TAG

KEYNOTES- WALL FINISH PLAN

WF1	SEE ELEVATIONS FOR DESIGN DETAILS.
WF2	TR-2 TO BE USED AT ALL CORNERS OF TILED WALLS AT MAILBOX BANK ISLANDS IN MAIL/COFFEE LOUNGE
WF3	TR-1 TO BE USED AT ALL CORNERS OF TILED WALLS IN PET SPA.
WF4	NOTE REMOVED.
WF5	WALLS ABOVE MAILBOX & MILLWORK WALL BUMP OUTS IN MAIL/COFFEE LOUNGE TO BE PAINTED PT-1. SEE ELEVATIONS AND SHEET ID-12.0 FOR 3D VIEWS.

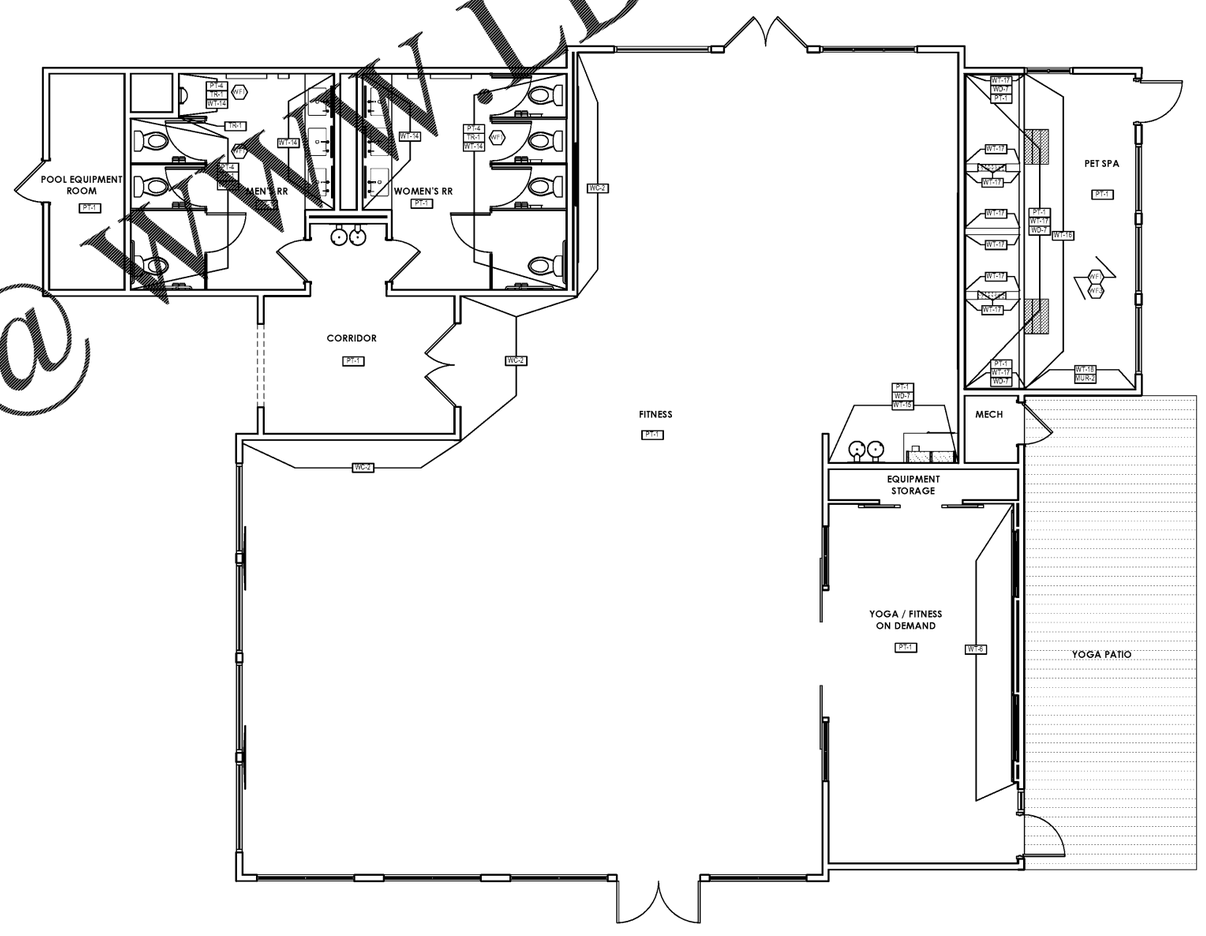

Order Plans @ WWW.LDILine.com

CROSBY DESIGN GROUP
Crosby Design Group
Interior Design Firm
1440 Dutch Valley Place
Suite 755
Atlanta, Georgia 30324
404.872.9777 tel
www.crosbydesigngroup.com

HISTORY	
05.06.2019	DESIGN DEVELOPMENT SET
TBD	PERMIT SET

REVISIONS

© COPYRIGHT 2012 CROSBY DESIGN GROUP
THIS DRAWING IS THE PROPERTY OF THE INTERIOR DESIGNER AND MAY NOT BE REPRODUCED OR USED WITHOUT HIS WRITTEN PERMISSION

FOUNDRY33
CHATTANOOGA, TN

DATE 05/01/2020

FOUNDRY33

SHEET TITLE
WALL FINISH PLAN - FITNESS AMENITY BUILDING

SHEET NO.
ID-5.4

☐ NOT ISSUED FOR CONSTRUCTION
■ ISSUED FOR CONSTRUCTION

5/1/2020 3:56:39 PM