



KPS GLOBAL PREFABRICATION
WALK-IN FREEZER/COOLER UNIT

kps GLOBAL ENGINEERING BULLETIN NO: 6415
SUBJECT: NSF LABELING DATE: April 15, 2015

The National Sanitation Foundation (NSF) in accordance with Standards 7 and 51 establishes minimum food protection and sanitation requirements for the materials, design, manufacture construction and performance of walk-in coolers and freezers and their related components. An NSF inspector audits each of our facilities every three months.

When specified on the drawings, an NSF label is applied to the interior of the door section, latch side or to the interior of the panel adjacent to an opening when a door section is not used.

A standard NSF label is applied to units with panels and refrigeration supplied by KPS Global. An NSF "COMPONENT" label is applied when panels only are supplied by KPS Global and the refrigeration is supplied by someone else.

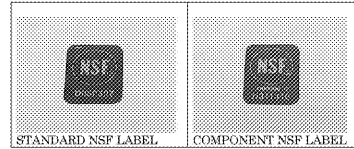


When specified on the drawings, a "PACKAGED PRODUCT ONLY" label is used

kps GLOBAL ENGINEERING BULLETIN NO: 6420
SUBJECT: ETL ELECTRICAL LABELING DATE: April 15, 2015

ETL Testing Laboratories has conducted tests and evaluation of KPS Global wiring methods and installation in accordance with UL-471, CAN/CSA C22.2 and the National Electrical Code, NFPA 70. An ETL inspector audits each of our facilities every three months.

An ETL label is applied to the interior of the door section, latch side or to the interior of the panel adjacent to an opening when a door section is not used.

A separate Procedures Manual is included as part of the ETL listing program. Each facility has a separate label and listing number.


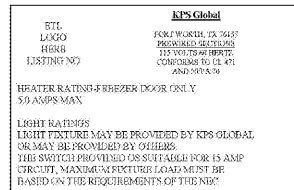


kps GLOBAL ENGINEERING BULLETIN NO: 6423
SUBJECT: UL LABELING DATE: April 15, 2015

Underwriters Laboratories (UL) has conducted flammability tests on KPS Global products in accordance with UL-723 for surface burning characteristics. UL also conducted tests for Canadian Classification in accordance with CANULC-S102 AND UL/CORD-3076. A UL inspector audits each of our facilities every three months.

When specified on the drawings, an UL label is applied to the interior of the door section, latch side or to the interior of the panel adjacent to an opening when a door section is not used and to each corner panel (five labels per unit).

A separate Procedures Manual is included as part of the UL listing program. Each facility has a separate label.

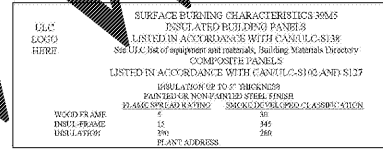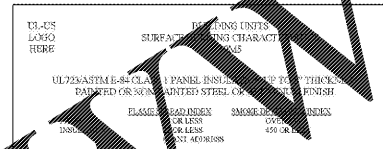

Larkin Products A Brand of Heatcraft Refrigeration Products
2175 West Park Place Boulevard
Stone Mountain, GA 30087
800.537.7775
www.larkinproducts.com

PTN042H6AE

Project: Dollar Tree Stores	QUOTATION:
Location: Various	Submitted by: Mike S. Jarrell
Customer:	DATE: 7/9/2015
Identity #:	For Record By:
Tag: Cooler	For Approval Date:

PHYSICAL & ELECTRICAL & CAPACITY DATA

REFRIGERANT	EVAPORATOR CFM	POWER SUPPLY Volts / Ph / Hz	MCA*	MOP*	Unit Amps	NEMA Receptacle	APPROX. NET WEIGHT (LBS)	Refrig. Charge (OZ)
R404A	340	115/1/60	11.3	15	9.3	5-20R	275	34

CAPACITY (BTUH)

425°F Bypass	+38°F Room	0°F Room	-10°F Room	-20°F Room	AMBIENT TEMP. CAPACITY (BTUH) at 95°F Ambient
4360	4570	0	0	0	



MINIMUM UNIT CLEARANCES

DIMENSIONS (inches)										
A	B	C	D	E	F	G	H	I	J	K
28.1	2	15.5	4	24.1	20.4					


Larkin Products A Brand of Heatcraft Refrigeration Products
2175 West Park Place Boulevard
Stone Mountain, GA 30087
800.537.7775
www.larkinproducts.com

PTN042H6AE

Project: Dollar Tree Stores	QUOTATION:
Location: Various	Submitted by: Mike S. Jarrell
Customer:	DATE: 7/9/2015
Identity #:	For Record By:
Tag: Cooler	For Approval Date:

STANDARD FEATURES

- 1/2" thick stainless steel interior
- 1/2" thick stainless steel exterior
- 1/2" thick stainless steel door
- 1/2" thick stainless steel door
- 1/2" thick stainless steel door
- 1/2" thick stainless steel door
- 1/2" thick stainless steel door
- 1/2" thick stainless steel door
- 1/2" thick stainless steel door
- 1/2" thick stainless steel door



Larkin Products A Brand of Heatcraft Refrigeration Products
2175 West Park Place Boulevard
Stone Mountain, GA 30087
800.537.7775
www.larkinproducts.com

PTN052L6BE


Project: Dollar Tree Stores	QUOTATION:
Location: Various	Submitted by: Mike S. Jarrell
Customer:	DATE: 7/9/2015
Identity #:	For Record By:
Tag: Freezer	For Approval Date:

PHYSICAL & ELECTRICAL & CAPACITY DATA

REFRIGERANT	EVAPORATOR CFM	POWER SUPPLY Volts / Ph / Hz	MCA*	MOP*	Unit Amps	NEMA Receptacle	APPROX. NET WEIGHT	Refrig. Charge (OZ)
R404A	900	230/1/60	18.1	20	15.3	6-20R	275	45

CAPACITY (BTUH)

+35°F Room	+38°F Room	0°F Room	-10°F Room	-20°F Room	AMBIENT TEMP. CAPACITY (BTUH) at 95°F Ambient
0	0	7000	5360	3910	

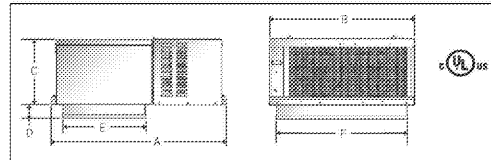

MINIMUM UNIT CLEARANCES

DIMENSIONS (inches)										
A	B	C	D	E	F	G	H	I	J	K
52	42	19	4	24.75	38.25					


Larkin Products A Brand of Heatcraft Refrigeration Products
2175 West Park Place Boulevard
Stone Mountain, GA 30087
800.537.7775
www.larkinproducts.com

PTN052L6BE

Project: Dollar Tree Stores	QUOTATION:
Location: Various	Submitted by: Mike S. Jarrell
Customer:	DATE: 7/9/2015
Identity #:	For Record By:
Tag: Freezer	For Approval Date:

STANDARD FEATURES

- 1/2" thick stainless steel interior
- 1/2" thick stainless steel exterior
- 1/2" thick stainless steel door
- 1/2" thick stainless steel door
- 1/2" thick stainless steel door
- 1/2" thick stainless steel door
- 1/2" thick stainless steel door
- 1/2" thick stainless steel door
- 1/2" thick stainless steel door
- 1/2" thick stainless steel door

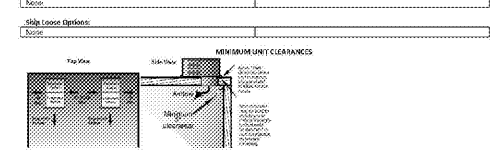

- GENERAL NOTES:
1. THE PROPOSED FREEZER/COOLER UNIT SIZE IS INDICATED ON FLOOR PLAN.
 2. ALL WALK-IN # MERCHANDISING UNITS ARE SELF CONTAINED AND DO NOT REQUIRE A FLOOR DRAIN.
 3. INSTALLATION OF THESE NSF, ETL & UL LISTED UNITS SHALL COMPLY WITH ALL STATE AND LOCAL CODES PER APPROVED PLANS.

WWW.LDILine.com

Order Plans

description
by
date
mark
revisions

06/04/15
06/05/15
06/05/15
06/05/15
06/05/15

project
designed
drawn
checked

CASCO
SALEM BVS
SALEM BVS
SALEM BVS
PROJECT MANAGERS

FOR INFORMATION ONLY
NO SIGNATURE
REQUIRED

FIGURE 314-24-1000

project
drawing

DOLLAR TREE
SALEM BVS
871 KENNICOTT BLVD., SALEM, MO 65660
WALK-IN REFRIGERATION

D63