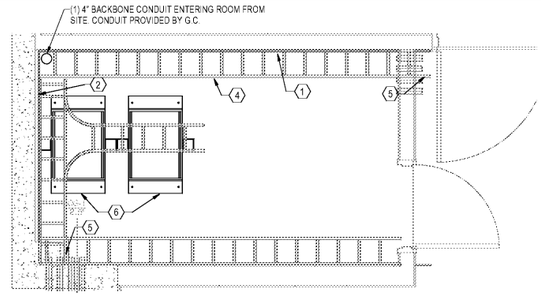

1 ENLARGED TELECOMMUNICATIONS ROOM 103 PLAN

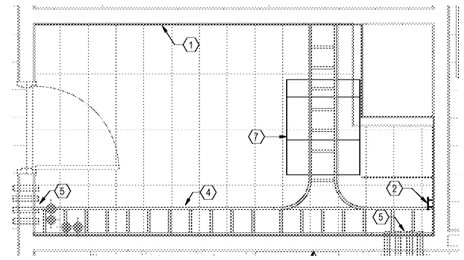

3 ENLARGED SERVER ROOM 230 PLAN

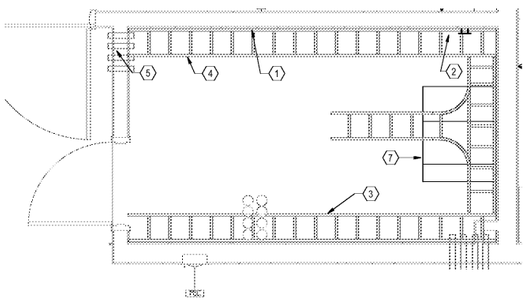

2 ENLARGED SERVER ROOM 105 PLAN

ENLARGED FLOOR PLAN KEY NOTES

1. TELECOMMUNICATIONS MAIN PLYWOOD BACKBOARD MOUNTED ON 3 WALLS, PROVIDED BY G.C.
2. GROUNDING BUSBAR, PROVIDED BY G.C.
3. COMMUNICATIONS HORIZONTAL CABLING SLEEVE TO FLOOR BELOW. PROVIDE (4) 4" CONDUITS TO FLOOR BELOW. PROVIDED BY G.C.
4. 12" WIDE CABLE RUNWAY,TYPICAL, PROVIDED BY G.C.
5. (4) 4" MECHANICAL SLEEVE FIRESTOP, PROVIDED BY G.C.
6. PROVIDE FLOOR MOUNT 4-POST EQUIPMENT RACK. REFER TO RACK ELEVATIONS.
7. PROVIDE FULL HEIGHT 23" WIDE SERVER CABINET.

SCHMIDT CONSULTING GROUP, INC.
MECHANICAL ELECTRICAL STRUCTURAL
COMMUNICATIONS INDUSTRIAL
ALABAMA LICENSE NUMBER 2542
901 W. Garden St. Pensacola FL 32502
P: 850-438-0050 F: 850-432-6631
TODD NICHOLSON P.E.
ALABAMA LICENSE NUMBER 29943-E
SCG PROJECT: 2016-151

GMC
2701 1st Avenue S
Birmingham, AL 35233
T 205.879.4462
@MCNETWORK.COM

ISSUE	DATE
ISSUE FOR BID	2018.05.25

DRAWN BY: CEC
CHECKED BY: TAN

SIMULATION LABORATORY
BUILDING - USA JOB #16-07
MOBILE, ALABAMA
ABC #2017372
GMC # AMOB160019

ALABAMA LICENSED 29943-E PROFESSIONAL ENGINEER TODD ALAN NICHOLSON 5/11/18

ENLARGED TELECOMMUNICATIONS PLAN

T501

sheet of

5/23/2018 8:00:05 AM

Order Plans @ WWW.LDILine.com