


PAVEMENT TYPE	STANDARD DUTY	HEAVY DUTY
CONCRETE "A"	6.0 INCHES	7.0 INCHES
COMPACTED SUBGRADE (85-90) "B"	12.0 INCHES	12.0 INCHES

**PAVEMENT DESIGN IS BASED ON TYPICAL PAVEMENT SECTIONS PROVIDED BY THE OWNER. ANDERSON ENGINEERING PROVIDES NO WARRANTY OR GUARANTEE FOR THIS DESIGN. CONTRACTOR IS RESPONSIBLE TO HIRE A RESPONSIBLE GEOTECHNICAL ENGINEER TO PROVIDE ALL NECESSARY TESTING AND RECOMMENDATIONS.

PAVEMENT TYPE	STANDARD DUTY	HEAVY DUTY
ASPHALTIC CONCRETE "A"	1.5 INCHES TYPE 3 ASPHALTIC CONCRETE	2.5 INCHES TYPE 3 ASPHALTIC CONCRETE
CRUSHED CONCRETE OR LUSHPACK "B"	6.0 INCHES	6.0 INCHES


**PAVEMENT DESIGN IS BASED ON TYPICAL PAVEMENT SECTIONS PROVIDED BY THE OWNER. ANDERSON ENGINEERING PROVIDES NO WARRANTY OR GUARANTEE FOR THIS DESIGN. CONTRACTOR IS RESPONSIBLE TO HIRE A RESPONSIBLE GEOTECHNICAL ENGINEER TO PROVIDE ALL NECESSARY TESTING AND RECOMMENDATIONS.

PROVIDE CONTROL JOINTS AT 12'-0" O.C. (25% SLAB THICKNESS)

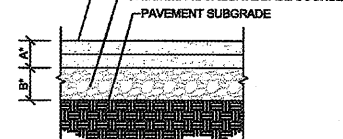


1 CONCRETE PAVING SECTION
C2.2 SCALE: 3/4" = 1'-0"

REFER TO TABLE 1 DETAIL 1/C2.2 FOR THICKNESS OF PAVING WITH 6X6-W1.4XW1.4 WWF (PLACED AT MID HEIGHT OF SLAB)

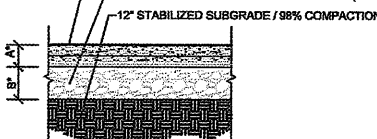


2 ASPHALT PAVING SECTION
C2.2 SCALE: 3/4" = 1'-0"

PROVIDE CONTROL JOINTS AT 10'-0" O.C. (25% SLAB THICKNESS)

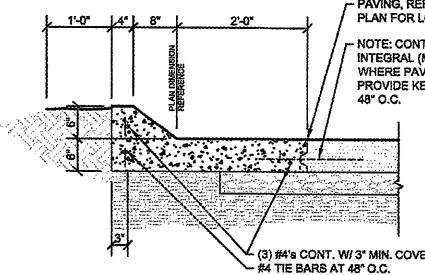


3 CONCRETE CURB SECTION
C2.2 SCALE: 3/4" = 1'-0"

NOTE: REFER TO SITE GRADING PLAN FOR ELEVATIONS OF PAVEMENT ADJACENT TO SIDEWALKS.

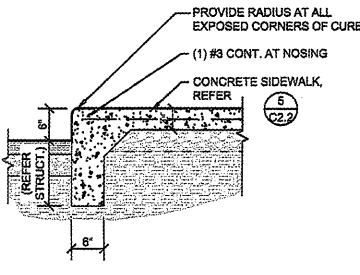


4 CONCRETE SIDEWALK CURB SECTION
C2.2 SCALE: 3/4" = 1'-0"

PROVIDE TOOLED CONTROL JOINTS AT 8' O.C. (25% SLAB THICKNESS) AND ISOLATION JOINTS AT 24' O.C., UNLESS OTHERWISE NOTED.

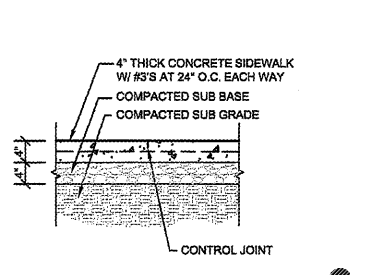


5 CONCRETE SIDEWALK SECTION
C2.2 SCALE: 3/4" = 1'-0"


NOTE: SYMBOL TO BE PAINTED (HIGHWAY GRADE) OR DECAL ADHERED TO PAVEMENT. COLOR TO MATCH STRIPING UNLESS OTHERWISE REQUIRED BY LOCAL ACCESSIBILITY STANDARDS.

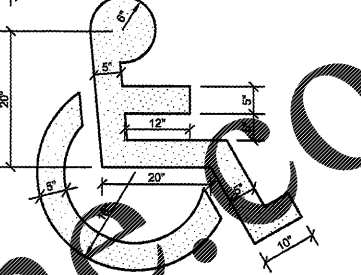

6 ACCESSIBLE PARKING PAVEMENT STRIPING DETAIL
C2.2 SCALE: 3/4" = 1'-0"

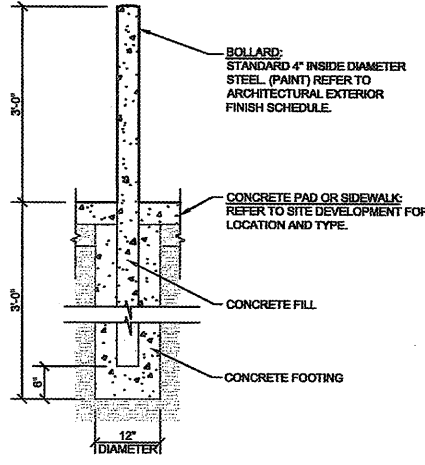


7 STEEL BOLLARD SECTION
C2.2 SCALE: 3/4" = 1'-0"

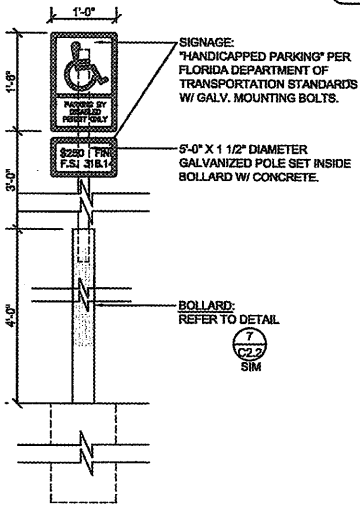

8 HANDICAP PARKING SIGN DETAIL
C2.2 SCALE: 3/4" = 1'-0"


PROVIDE DETECTABLE WARNINGS WITH RAISED PATTERN (CAUTION YELLOW COLOR WITH .8" DIA. AND RAISE .02" PER ADAAG 4.7.7)

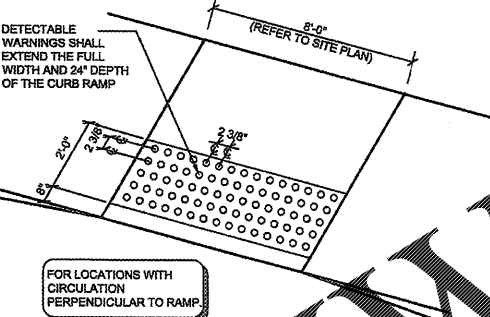


9 DETECTABLE WARNING DETAIL
C2.2 SCALE: (NOT TO SCALE)

10 NOT USED
C2.2 SCALE: (NOT TO SCALE)

PROVIDE CONTROL JOINTS AT 12'-0" O.C. (25% SLAB THICKNESS)

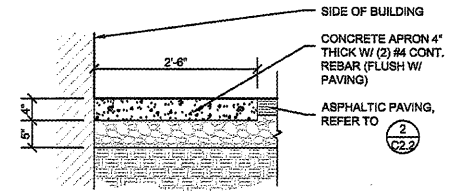

11 CONCRETE PAVING APRON SECTION
C2.2 SCALE: 3/4" = 1'-0"




CRAIG A. SCHNEIDER, AIA
ARCHITECT
1736 East Sunshine, Suite 417
Springfield, Missouri 65804
417.862.0558
Fax: 417.862.0558
e-mail: architect@esterline.com

PROJECT:
NEW O'REILLY AUTO PARTS STORE
1345 15TH STREET
PANAMA CITY, FL #1
SITE DEVELOPMENT DETAILS

O'Reilly AUTO PARTS
CORPORATE OFFICES
233 SOUTH PATTERSON
SPRINGFIELD, MISSOURI 65802
(417) 862-2674 TELEPHONE

COMM #	4275
DATE	1-4-19
REVISION	
DATE	



C2.2

Order Plans @ www.esterline.com