

GENERAL NOTES

- BUILDING SHALL HAVE PRE-CONSTRUCTION TREATMENT PROTECTION AGAINST SUBTERRANEAN TERMITES IN ACCORDANCE WITH THE RULES AND LAWS ESTABLISHED BY THE FLORIDA DEPARTMENT OF AGRICULTURE AND CONSUMER SERVICES. A CERTIFICATE OF COMPLIANCE SHALL BE ISSUED TO THE BUILDING DEPARTMENT BY THE LICENSED PEST CONTROL COMPANY PERFORMING THE TREATMENT IN ACCORDANCE WITH FDC 18B.1.
- SOIL TREATMENT FOR TERMITES CONTROL SHALL BE PER SPECIFICATION SECTION 02250 SOIL TREATMENT.
- REFER TO FLORIDA PRODUCT APPROVAL SCHEDULE ON COVER SHEET FOR APPLICABLE ESTATEMENT SPEC. IMPACT GLASS MAY BE REQUIRED.
- RE: 1/2" DIA. G.C. STUDS @ 16" O.C. W/ 1/2" DIA. G.C. WALL TIE IN THE FOOD SERVICE AREA AND RESTROOMS.
- ALL INTERIOR WALLS SHALL BE 1/2" GWS U.O.D.
- ALL INTERIOR GWS CEILINGS TO BE 5/8" U.O.D.

LEGEND

- 8" MTL STUDS @ 16" O.C. W/ 1/2" DIA. G.C. WALL TIE
- 3/8" MTL STUDS @ 16" O.C. W/ 1/2" DIA. G.C. WALL TIE
- 3/8" MTL STUDS @ 16" O.C. W/ 1/2" DIA. G.C. WALL TIE
- CONCRETE BLOCK (CMU)

EQUIPMENT BLOCKING NOTES

#	ITEM	BLK MATL	LOCATION AND REMARKS
1	SHELVING @ 3 COMP. SINK	1/2" PLYWOOD	IN LIEU OF GWS. SEE ELEVATION
2	WOP HOLDER	2" X 6"	5'-8"
3	HAND DRYER	2" X 6"	5'-8"
4	FUTURE ACCESSORY	2" X 6"	5'-8"
5	WASH SINK	2" X 6"	5'-8"
6	URINAL	AS PER MANUF.	5'-8"
7	GRAB BARS	AS PER MANUF.	5'-8"
8	TRASH BAG HOLDER	2" X 6"	7'-0" AND 8'-0"
9	TOILET PARTITIONS	AS PER MANUF.	3'-10"
10	COAT HOOKS	2" X 12"	3'-10"
11	OFFICE SECURITY SHELF	4" X 10"	4'-0" SEE DETAIL ON BAR
12	LOCKERS	2" X 10"	7'-10"
13	FUEL TANK MONITOR	2" X 12"	5'-0"
14	SURGE TANK SHELF	2" X 6"	7'-8"
15	WATER FOUNTAIN LOW	2" X 6"	7'-8"
16	WATER FOUNTAIN HIGH	2" X 6"	7'-8"
17	BEER COOLER SIGN	2" X 6"	7'-8"
18	FIRE EXTINGUISHER	2" X 6"	7'-0" SEE DETAIL 609
19	CBS UNIT	AS PLYWOOD	IN LIEU OF GWS. PER TO CLG
20	FULL SERVICE CURBY	2" X 6" @ 2' X 10"	SEE DETAIL 795.1
21	COFFEE AREA CURBY	2" X 6" @ 2' X 10"	SEE DETAIL 808.1
22	GOOSE LOGO SIGN	2" X 6"	8'-0" @ 10'-0" SEE ELEVATION
23	COMPARTMENT SINK	2" X 12"	7'-11" SEE ELEVATION
24	TRASH RECEPTACLE	2" X 12"	7'-11"
25	AIR CURTAIN	2" X 12"	ABOVE DOOR. SEE 10M3
26	BOOSTER PUMP SHELF	UNIFRUIT	RE: DETAIL 280B VERIFY EXACT LOCATION IN FIELD
27	ICE MACHINE SHELF	IF METAL STUDS	RE: DETAIL 270B


DOOR NOTES

DOOR FRAMES: ALL DOOR FRAMES, INTERIOR AND EXTERIOR TO BE FULLY WELDED. NO KNOCK-DOWN FRAMES. WOOD BLOCKING AT JAMBS AND HEAD OF ALL INTERIOR DOORS AS REQUIRED.

- DOOR #S SHOWN IN DOOR SCHEDULE ARE TYPICAL FOR WAWA STORES. VERIFY QUANTITIES AND WHICH DOORS ARE REQUIRED AS INDICATED IN FLOOR PLAN.
- SEE STOREFRONT MANUFACTURER SPECIFICATIONS FOR VESTIBULE DOORS AND HARDWARE. DOORS ARE TO BE KEVED ALIKE WITH THUMB LATCH AND CLOSER AT ALL DOORS.
- ALL EXTERIOR HOLLOW METAL DOORS SHALL BE INSULATED DOORS.
- RUN CONTINUOUS BEAD OF CLEAR SILICONE CAULK AROUND ALL DOOR FRAMES.
- EXIT DOOR LOCKS, IF PROVIDED ON EGRESS DOORS, SHALL NOT REQUIRE THE USE OF A KEY. TOOL, SPECIAL KNOWLEDGE OR EFFORT FOR OPERATION FROM THE EGRESS SIDE IN ACCORDANCE WITH SECTION 14.3.2.3 OF FPPC AND SECTION 1010.1.9 OF FBC UNLESS SPECIFICALLY ALLOWED BY CODE.
- ALATCH OR OTHER FASTENING DEVICE ON AN EGRESS DOOR SHALL BE PROVIDED WITH A PANO. HANDLE, PANO BAR, OR OTHER SIMPLE TYPE OF RELEASING DEVICE HAVING AN OBVIOUS METHOD OF OPERATION UNDER ALL LIGHTING CONDITIONS. DOORS SHALL BE OPERABLE WITH NO MORE THAN ONE RELEASING OPERATION PER FPPC 14.5.2.10.
- ALL DOORS SERVING SPACES REQUIRED TO BE ACCESSIBLE SHALL BE PROVIDED WITH OPERABLE PARTS THAT SHALL BE OPERABLE WITH ONE HAND AND SHALL NOT REQUIRE TIGHT GRASPING, PRONCHING, OR TWISTING OF THE WRIST. THE FORCE REQUIRED TO ACTIVATE OPERABLE PARTS SHALL BE 5 POUNDS MAXIMUM (FBC 404.2.7).
- REFER TO HARDWARE SCHEDULE IN THE SPECIFICATION MANUAL.
- THRESHOLD: NOT TO EXCEED 1/2" HIGH.
- DOOR TO REQUIRE HOLE IN SLAB FOR BOLT.
- VISION PANEL DIMENSIONS COORDINATE TO VISIBLE LIGHT DIMENSIONS. CONTRACTOR TO COORDINATE REQUIRED GLASS SIZE AND ROUGH OPENING WITH DOOR MANUFACTURER.
- ALL VISION PANELS SHALL BE INSTALLED IN THE FRAME PER SPECIFICATIONS. THE DOORS SHALL HAVE ACROVYN COVERINGS FACTORY APPLIED.

1 FLOOR PLAN
A1
14' x 14'

Order Plans @ WWW.ONLINE.COM

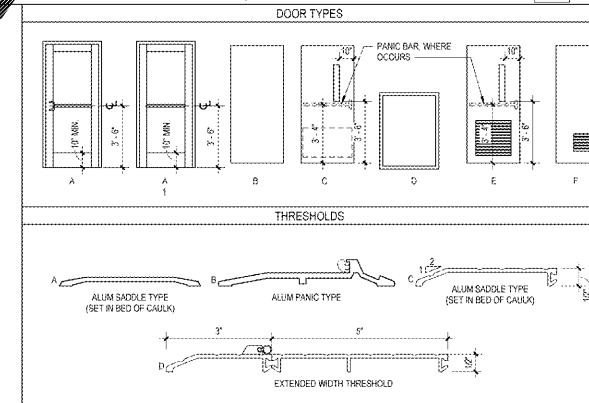

DOOR SCHEDULE REFER TO SHEET A10 FOR TRASH COMPOUND DOOR

#	W	H	TH	TYPE	MATL	FRM	THR	HW	SET	COMMENTS	PUSH	KICK PLATE
01	4'-0"	7'-0"	3/4"	D	ALUM	ALUM	HM	A	HW 10	4" X 25" LAMINATED GLASS VISION PANEL. SEE 26 & 26A2 FOR HEAD & JAMB. SEE 2109 FOR SIL.	FANIC BAR	
02	3'-0"	6'-8"	3/4"	E	HM	HM	C	HW 13	HW 13	4" X 25" GLASS VISION PANEL. SEE 26 & 26A2 FOR HEAD & JAMB. SEE 2109 FOR SIL.	FANIC BAR	
03	3'-0"	7'-0"	3/4"	BF	HM	HM	D	HW 13	HW 13	4" X 25" GLASS VISION PANEL. SEE 26 & 26A2 FOR HEAD & JAMB. SEE 2109 FOR SIL.		
04	3'-0"	6'-8"	3/4"	C	HM	HM	C	HW 13	HW 13	4" X 25" ONE WAY VISION PANEL. SEE DETAIL 2249.	LOCKSET	16" X 34" 16" X 34"
05	3'-0"	6'-8"	3/4"	B	WD	HM	C	HW 7	HW 7	UNDERDOOR DOOR 1" SEE DETAIL 2249.		
06	3'-0"	6'-8"	3/4"	REF						BY REFRIGERATION COMPANY		
07	3'-0"	6'-8"	3/4"	REF						BY REFRIGERATION COMPANY		
08	3'-0"	6'-8"	3/4"	REF						BY REFRIGERATION COMPANY (DOUBLE DOORS) W/ 8" X 14" LITE		
09	3'-0"	6'-8"	3/4"	C	HM	HM	A	HW 11	HW 11	4" X 25" GLASS VISION PANEL. SEE DETAIL 2249.	PASSAGE SET	16" X 34" 16" X 34"
10	3'-0"	7'-0"	3/4"	C	HM	HM	A	HW 11	HW 11	4" X 25" LAMINATED GLASS VISION PANEL. SEE 26 & 26A2 FOR HEAD & JAMB. SEE 2109 FOR SIL.	LOCKSET	36" X 41"
11	3'-0"	4'-0"	3/4"	D	ALUM	ALUM	ALUM	HW 19	HW 19	TOWER ACCESS: NYSYSTEM XTL SERIES INSULATED ACCESS PANEL.		
12	3'-0"	7'-0"	3/4"	A	ALUM	ALUM	ALUM	HW 20	HW 20	PROVIDE 1/2" DIA. G.C. STUDS @ 16" O.C. BALANCE & HARDWARE BY DOOR SUPPLIER.	FUSH BAR	
13	3'-0"	7'-0"	3/4"	A	ALUM	ALUM	ALUM	HW 20	HW 20	PROVIDE 1/2" DIA. G.C. STUDS @ 16" O.C. BALANCE & HARDWARE BY DOOR SUPPLIER.	FUSH BAR	
14	3'-0"	7'-0"	3/4"	A1	ALUM	ALUM	C	HW 20	HW 20	NO HOLD OPENS. PUSH ONLY. THUMB LATCH HW	FUSH BAR	

DOOR SCHEDULE

#	W	H	TH	TYPE	MATL	FRM	THR	HW	SET	COMMENTS	PUSH	KICK PLATE
01	3'-0"	4'-0"	3/4"	D	ALUM	ALUM	HM	A	HW 3	TOWER ACCESS: NYSYSTEM XTL, SERIES INSULATED ACCESS PANEL. PROVIDE BARN SHELD. SEE 346.		
02	3'-0"	6'-8"	3/4"	C	HM	HM	HM	HW 3	HW 3	4" X 25" GLASS VISION PANEL. SEE DETAIL 2249.	8" X 16"	16" X 34" 16" X 34"
03	3'-0"	6'-8"	3/4"	C	WD	HM	HM	HW 3	HW 3	DOUBLE ACTING W/ 4" X 25" GLASS VISION PANEL. SEE DETAIL 2249.	(2) 8" X 16"	16" X 34" 16" X 34"
04	3'-0"	6'-8"	3/4"	C	WD	HM	HM	HW 3	HW 3	4" X 25" ONE WAY VISION GLASS / THUMB LATCH. SEE DETAIL 2249.	8" X 16"	16" X 34" 16" X 34"
05	3'-0"	6'-8"	3/4"	C	WD	HM	HM	HW 3	HW 3	ONE WAY 4" X 25" VISION PANEL. PROVIDE JAMB W/ EXTENSION ON THE RETAIL SIDE. SEE DETAIL 2249.	8" X 16"	16" X 34" 16" X 34"

1925 Prospect Ave.
Orlando, FL 32814
P (407) 661-9100
F (407) 661-9101
www.ep.com

Chubb & Peterson
Architects Engineers Planners

CLIENT NAME
WAWA
260 WEST BALTIMORE PIKE
WAWA, PENNSYLVANIA 19063

PROJECT NAME
WAWA F85FB 2019.01 STORE #5357-DOR
NW 87TH AVE. & NW 35RD ST.
DORAL, FLORIDA

SHEET TITLE
FLOOR PLAN

Revision Schedule

No.	Description	Date
1	PRELIMINARY SET	08/17/2019
2	REVISED SET	09/03/2019
3	REVISED SET	09/03/2019
4	REVISED SET	09/03/2019
5	REVISED SET	09/03/2019

PROJECT NO. 217108
DATE 09-03-2019
DRAWN BY WAWA
CHECKED BY EL

A1