

- INTRUSION ALARM CONTROL PANEL LAYOUT NOTES**
1. THE INTRUSION ALARM CONTROL PANEL SHALL BE LOCATED IN A GRAY ENCLOSURE CABINET.
 2. PROVIDE THE SERVICE PHONE NUMBER STICKER ON THE SURFACE OF THE ICP.
 3. PROVIDE 1361 TRANSFORMER CONNECTED TO A 120 VAC DUPLEX OUTLET FOR THE INTRUSION ALARM CONTROL PANEL (ICP). LABEL THE CIRCUIT BREAKER "INTRUSION ALARM CIRCUIT". THE LOCATION OF THE CIRCUIT DISCONNECT SHALL BE IDENTIFIED AT THE ICP. ALL CIRCUIT BREAKERS SHALL BE CLEARLY MARKED AND MECHANICALLY SECURED TO PREVENT ANY UNAUTHORIZED TAMPERING.
 4. NOT USED.
 5. PROVIDE ONE (1) 12V BATTERY FOR THE INTRUSION ALARM CONTROL PANEL (ICP). SEE CALCULATIONS ON SHEET BA2 FOR AMP-HOUR REQUIREMENTS. THE BATTERY SHALL BE INSTALLED WITHIN THE ICP CABINET.
 6. NOT USED.
 7. COORDINATE INSTALLATION OF A GROUND ROD OR ACCEPTABLE BUILDING GROUND FOR PROPER GROUNDING OF THE ICP WITH THE ELECTRICAL CONTRACTOR.
 8. PROVIDE TWO (2) WEAVERS SIGNAL WIRE CONNECTION TO THE OFF-SITE MONITORING FACILITY AND A DEDICATED PHONE LINE FOR THE PRIMARY MEANS OF TRANSMISSION. THE SECONDARY MEANS SHALL UTILIZE A VOICE OVER INTERNET PROTOCOL (VoIP) INITIATION PROTOCOL (VoIP/ISIP) CONNECTION TO OWNERS. PROVIDE THE SERVICE PHONE NUMBER STICKER ON THE SURFACE OF THE ICP. THE ASSOCIATED PHONE NUMBER USING DIRECTLY ON THE RJ-31X BOXES. COMPLETE ALL PROGRAMMING, SIGNALS TRANSMISSION AND CONNECTIONS WITH THE OFF-SITE MONITORING COMPANY.
 9. PROVIDE THE ASSOCIATED PHONE NUMBER USING PRINTED LABEL DIRECTLY ON THE RJ-31X BOXES.



THIS DRAWING IS THE PROPERTY OF BRIDGESTONE RETAIL OPERATIONS, LLC AND IS LOANED TO THE EXPRESS CONDITION THAT IT IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT THE WRITTEN PERMISSION OF BRIDGESTONE RETAIL OPERATIONS, LLC.

NEW FCAC STORE
 2019 - JANUARY - SMALL ER
 S. AIRLINE HWY NEAR E. CORVIEW ST
 GONZALES, LA

DAVID J. BURKHART
 License No. 23242
 PROFESSIONAL ENGINEER
 FIRE PROTECTION
ENGINEER OF RECORD:
 DAVID J. BURKHART, PE
 License No. 23424
 CODE CONSULTANTS, INC.
 2043 WOODLAND PKWY, SUITE 300
 ST. LOUIS, MO 63146-4235
 PHONE: 314-991-2633
 CORPORATE CERTIFICATE OF AUTHORITY
 NO. EP2387


BID SET
 11.18.19
 TRCI

ISSUE BLOCK	
11/11/19	CS# 1


PROPERTY NO.:	160013
6 DIGIT NO.:	905226
4 DIGIT NO.:	014W
AOR PROJECT NUMBER:	1955827
TO PERMIT: DATE:	7-30-2019
BY: DATE:	###-###

SHEET TITLE:
INTRUSION ALARM CONTROL PANEL LAYOUT AND DETAILS

SHEET NUMBER:
BA3

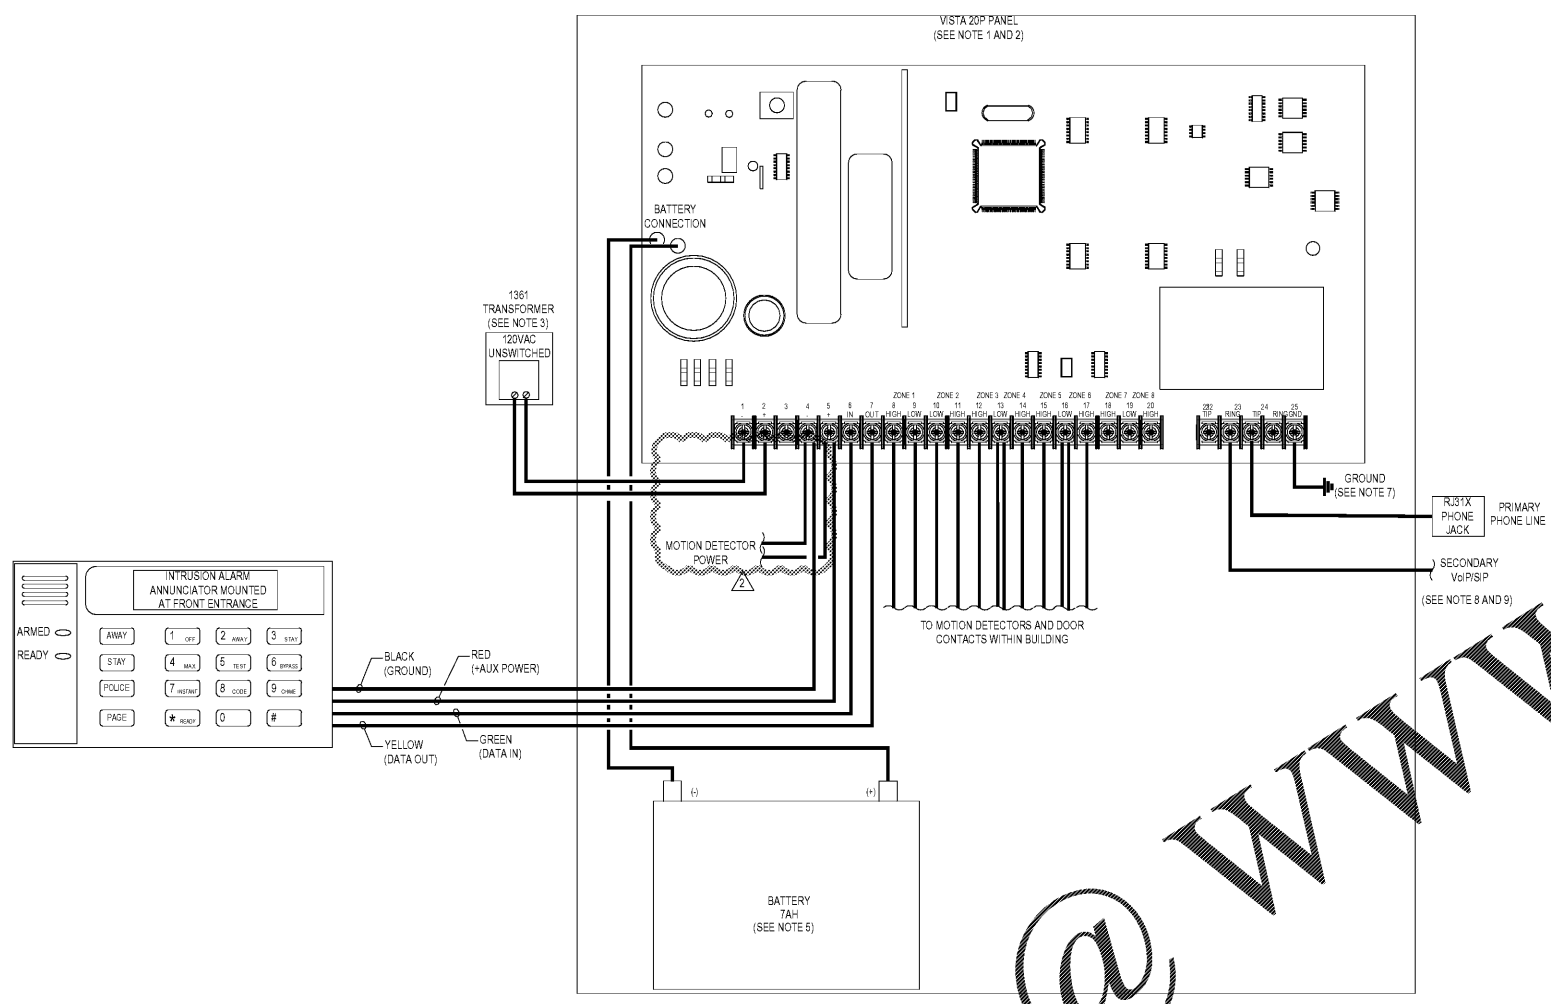


1 INTRUSION ALARM CONTROL PANEL LAYOUT
 BA3 NOT TO SCALE

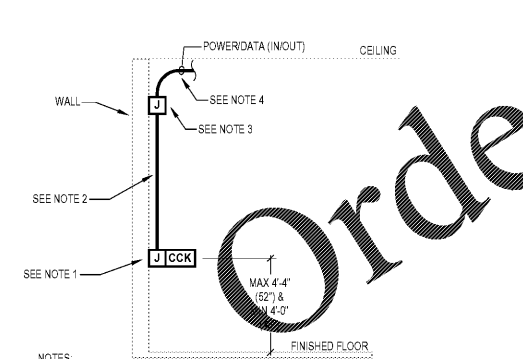


- NOTES**
1. PROVIDE AN APPROVED BACKBOX PER THE MANUFACTURER SPECIFICATIONS BETWEEN 48 INCHES AND 52 INCHES ABOVE FINISHED FLOOR.
 2. PROVIDE INTRUSION ALARM CABLING WITHIN 1/2 INCH CONDUIT INSIDE WALL (EXPOSED CONDUIT NOT ACCEPTABLE).
 3. INTRUSION ALARM CABLING AND CONDUIT SHALL BE STUB-UP TO THE CEILING JOIST AREA 6 INCHES TO THE BOTTOM OF JOISTS AND TURN OUT WITH INSULATED BUSHING.
 4. PROVIDE EXPOSED CABLING PARALLEL AND PERPENDICULAR TO BUILDING STRUCTURE.
 5. COORDINATE EXACT MOUNTING LOCATION OF THE CK WITH THE OWNER'S REPRESENTATIVE PRIOR TO INSTALLATION.

2 COMMAND CENTER KEYPAD DETAIL
 BA3 NOT TO SCALE

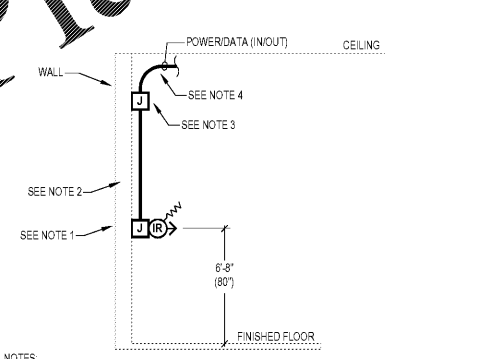


- NOTES**
1. PROVIDE AN APPROVED BACKBOX PER THE MANUFACTURER SPECIFICATIONS (RECOMMENDED TO BE INSTALLED AT 80 INCHES ABOVE FINISHED FLOOR).
 2. PROVIDE FIRE ALARM CABLING WITHIN 1/2 INCH CONDUIT INSIDE WALL (EXPOSED CONDUIT NOT ACCEPTABLE).
 3. INTRUSION ALARM CABLING AND CONDUIT SHALL BE STUB-UP TO THE CEILING JOIST AREA 6 INCHES TO THE BOTTOM OF JOISTS AND TURN OUT WITH INSULATED BUSHING.
 4. PROVIDE EXPOSED CABLING PARALLEL AND PERPENDICULAR TO BUILDING STRUCTURE.
 5. COORDINATE EXACT MOUNTING LOCATION OF THE MOTION DETECTORS WITH THE OWNER'S REPRESENTATIVE PRIOR TO INSTALLATION.

3 PIR MOTION DETECTOR DETAIL
 BA3 NOT TO SCALE

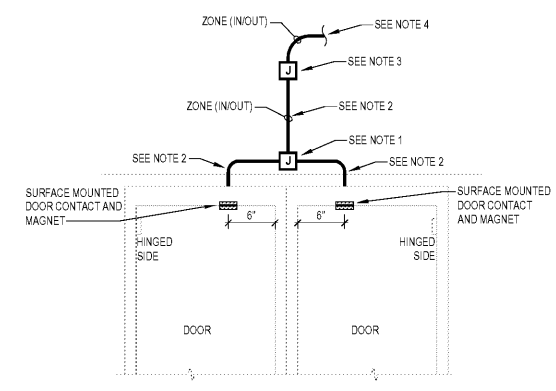

- NOTES**
1. INSTALL A RECESSED 4 INCH SQUARE BOX ABOVE CENTERED 4 INCHES ABOVE THE DOOR OPENING. PROVIDE A SURFACED MOUNTED COVER PLATE FOR JUNCTION BOX.
 2. PROVIDE INTRUSION ALARM CABLING WITHIN 1/2 INCH CONDUIT INSIDE WALL (EXPOSED CONDUIT NOT ACCEPTABLE).
 3. INTRUSION ALARM CABLING AND CONDUIT SHALL BE STUB-UP TO THE CEILING JOIST AREA 6 INCHES TO THE BOTTOM OF JOISTS AND TURN OUT WITH INSULATED BUSHING.
 4. PROVIDE EXPOSED CABLING PARALLEL AND PERPENDICULAR TO BUILDING STRUCTURE.
 5. COORDINATE EXACT MOUNTING LOCATION OF THE DOOR CONTACTS WITH THE OWNER'S REPRESENTATIVE PRIOR TO INSTALLATION.

4 DOUBLE DOOR CONTACT DETAIL
 BA3 NOT TO SCALE

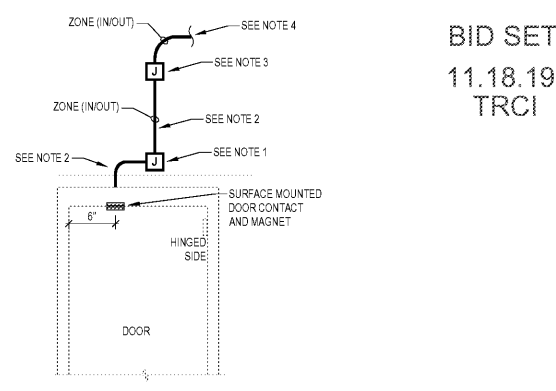

- NOTES**
1. INSTALL A RECESSED 4 INCH SQUARE BOX ABOVE CENTERED 4 INCHES ABOVE THE DOOR OPENING. PROVIDE A SURFACED MOUNTED COVER PLATE FOR JUNCTION BOX.
 2. PROVIDE INTRUSION ALARM CABLING WITHIN 1/2 INCH CONDUIT INSIDE WALL (EXPOSED CONDUIT NOT ACCEPTABLE).
 3. INTRUSION ALARM CABLING AND CONDUIT SHALL BE STUB-UP TO THE CEILING JOIST AREA 6 INCHES TO THE BOTTOM OF JOISTS AND TURN OUT WITH INSULATED BUSHING.
 4. PROVIDE EXPOSED CABLING PARALLEL AND PERPENDICULAR TO BUILDING STRUCTURE.
 5. COORDINATE EXACT MOUNTING LOCATION OF THE DOOR CONTACTS WITH THE OWNER'S REPRESENTATIVE PRIOR TO INSTALLATION.

5 SINGLE DOOR CONTACT DETAIL
 BA3 NOT TO SCALE

Order Plans @

WWW.LDILine.com