ELECTRICAL PACKAGE –
Job#4345540

| NO | TAG | PACKAGE # | LOCATION | SWITCHES | | OPTION | FANS CONTROLLED | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | LOCATION | QUANTITY | | FAN TAG | TYPE | # | H.P. | VOLT | FLA |
| 1 | | SC-1210SFP | Wall Mount in SS Rise | 05 - SS Wall Mount Rise | 1 Fan | Smart Controls Thermostatic Control | 8 Vel | Exhaust | 1 | 0.750 | 115 | 6.9 |
| | | | | | | | 8 Vel | Exhaust | 1 | 0.750 | 115 | 6.9 |
| | | | | | | | | Supply | 1 | 1.000 | 115 | 11.6 |




CASink Monitor and Control

- Hood Control Panel to support communication to Cloud-based Building Management System.
- Hood Control Panel to allow Cloud-based Building Management System to monitor Hood parameters (Lubricate MONITOR or Not Lubricate)
- Hood Control Panel to allow Cloud-based Building Management System to monitor Hood parameters (Clean MONITOR or Not Clean)
- Hood Control panel to allow remote changes to system settings such as:
- VFD Frequencies, RPM speeds, Temperature set points, fire and wash schedules, etc.

MONITORING AND CONTROL POINTS LIST

| | |
|---|---|
| ECV Fail light | Function |
| Make Torque Alert | MONITOR |
| Duct Temper Alert(s) | MONITOR |
| Belt Breakage Torque Alert | MONITOR |
| Makeup RTU Shortage Torque Alert | MONITOR |
| Fire Speed | MONITOR |
| Fire Wash light | MONITOR |
| Fire Alarm | MONITOR |
| UBC Fault | MONITOR |
| Cookline Fault | MONITOR |
| Fire Fault | MONITOR |
| Fire Status | MONITOR |
| VFD Fault | MONITOR |
| VFD Filter Dog Percentage | MONITOR |
| Duct Lockout | MONITOR |
| CORE Pro System | MONITOR |
| Building Pressure | MONITOR |
| Prog Time Button | MONITOR & CONTROL |
| Fire Button | MONITOR & CONTROL |
| Light Button | MONITOR & CONTROL |
| Wash Button | MONITOR & CONTROL |

| | |
|---|---|
| ID Fail light | Function |
| Make Torque Alert | MONITOR |
| Duct Temper Alert(s) | MONITOR |
| Belt Breakage Torque Alert | MONITOR |
| Makeup RTU Shortage Torque Alert | MONITOR |
| Cookline Fault | MONITOR |
| Fire Fault | MONITOR |
| Fire Status | MONITOR |
| VFD Fault | MONITOR |
| VFD Filter Dog Percentage | MONITOR |
| Duct Lockout | MONITOR |
| CORE Pro System | MONITOR |
| Building Pressure | MONITOR |
| Fire Fail Alert | MONITOR & CONTROL |
| Light Button | MONITOR & CONTROL |
| Wash Button | MONITOR & CONTROL |

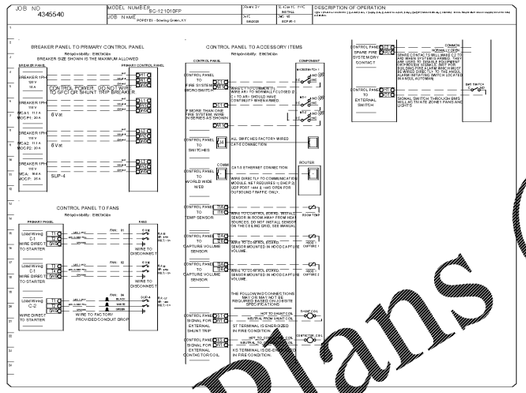


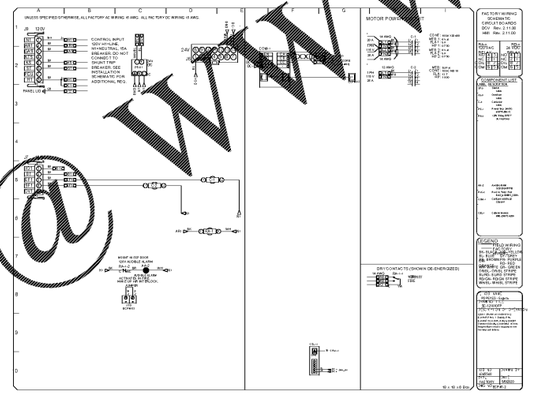


Order Plans @ WWW.LDILine.com

REVISIONS

| | DESCRIPTION | DATE |
|---|---|---|
| 1 | | |
| 2 | | |
| 3 | | |
| 4 | | |

CAPTIVE AIRE
Northern Ohio Office
895 Morrison Rd, Gahanna, OH 43230 PHONE - FAX: (919) 227-5925 EMAIL: roy52@captiveaire.com

POPEYES - Bowling Green, KY
Dishman Lane
Bowling Green, KY, 42101

DATE: 5/6/2020
DWG.#: 4345540
DRAWN BY: Tanderson
SCALE: 3/4" = 1'-0"
MASTER DRAWING
SHEET NO. 5

FRCH NELSON
A NELSON BRAND
311 Elm Street Suite 600
Cincinnati OH 45202
513 241 3000
www.frchnelson.com

LOUISIANA KITCHEN
POPEYES

JPL MANAGEMENT

ISSUE INFORMATION

REVISIONS

| | | |
|---|---|---|
| 1 | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |

Nelco Architecture, Inc.

STATE OF KENTUCKY
JOHN P. DULLEA
30529
LICENSED
PROFESSIONAL ENGINEER
05/08/2020

PROJECT INFORMATION

BOWLING GREEN, KY

DISHMAN LANE
BOWLING GREEN, KY 42101

PROJECT #:
11352

SHEET INFORMATION

CAPTIVE AIRE DETAILS

DRAWN BY:
Designer
REVIEWED BY:
Checker
SCALE:
1/2" = 1'-0"
AUTHORIZED FOR:
PERMIT

M9

This drawing, printed or otherwise, is the copyrighted property of Nelco Architecture, Inc. The drawing may not be used, reproduced or copied without the permission of Nelco Architecture, Inc.

5/12/2020 12:24:39 PM C:\Users\edduffy\Documents\11352 - Popeyes - Bowling Green KY_eduffyCFFAU.rvt