Taco Bell Mop Sink Installation

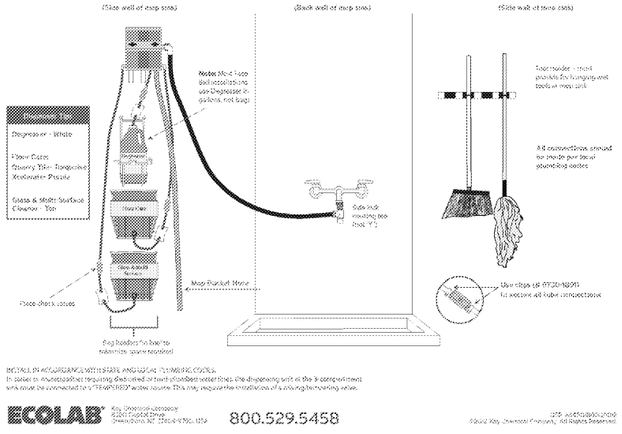

INSTALL IN ACCORDANCE WITH STATE AND LOCAL PLUMBING CODES.
In cases in which backflow requiring devices or backflow preventers fills the dispensing unit or the 3 compartment sink must be connected to a "PREWASH" hose, assume 10% line pressure reductions of a backflow preventing valve.

ECOLAB 800.529.5458

MOP SINK INSTALLATION N.T.S. **C**

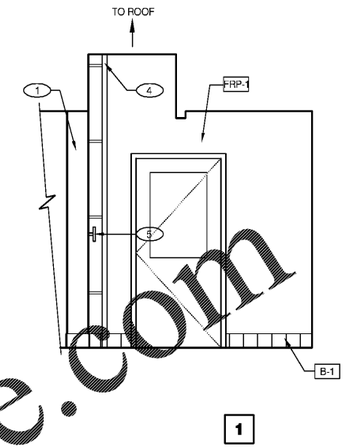

1

PRE-PAY 3/8"= 1'-0"

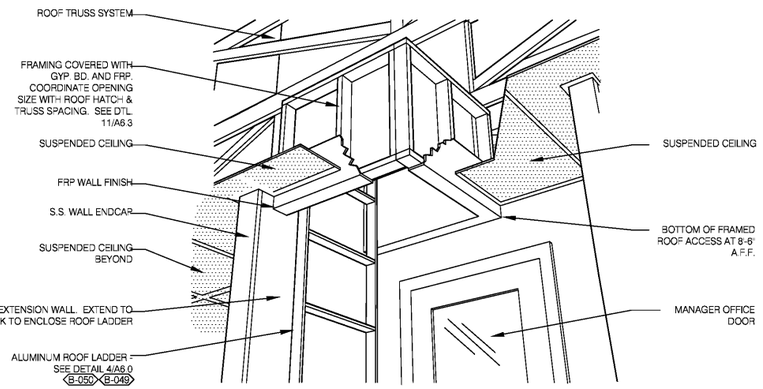

A - ROOF LADDER VIEW

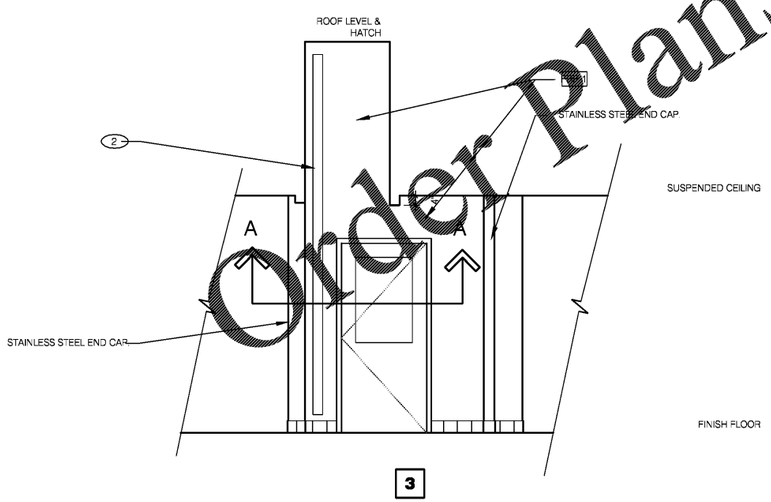

3

ROOF ACCESS PASSAGEWAY N.T.S. **D**

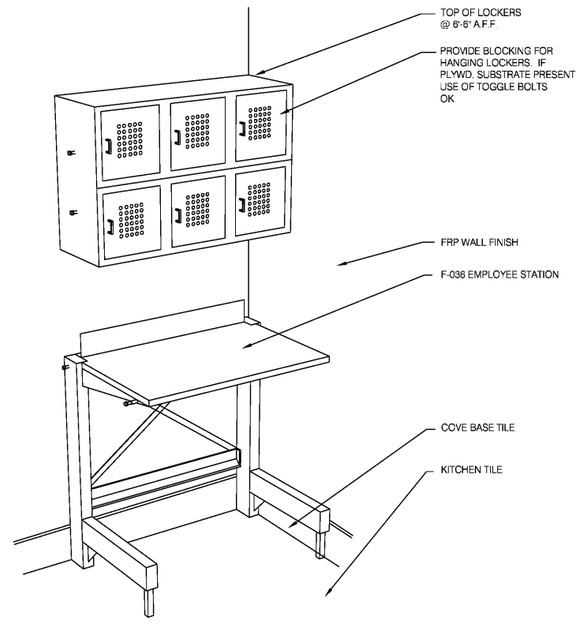

WORK STATION N.T.S. **B**

1. SS CORNER / END WALL CHANNEL GUARD, FULL HEIGHT. SEE 19/A6.3.
2. FRP OVER WINDOW INFILL.
3. SOAP / HAND SANITIZER DISPENSER - BY ECOLAB.
4. ROOF LADDER.
5. ANSUL PULL STATION.
6. WALL SHOWN PARALLEL TO VIEW FOR CLARITY.
7. EMPLOYEE WORK STATION. REFER TO DETAIL B THIS SHEET.
8. ELECTRICAL PANEL. REFER TO ELECTRICAL SHEETS.

KEY NOTES **A**

FREDERICK J. GOGLIA
ARCHITECT, NCARB, RDI
1950 CRAIG ROAD, SUITE 300 ST. LOUIS, MO 63146
PH. (314) 415-2400 FAX (314) 415-2300 www.arcv.com

	REVISION	FEB18
△		
△		
△		

CONTRACT DATE:	11/17/20
BUILDING TYPE:	ENDEAVOR MED 40
PLAN VERSION:	SEPT 2020
BRAND DESIGNER:	200109
SITE NUMBER:	297222
STORE NUMBER:	003717
ARCVISION:	200188

TACO BELL

6151 HWY 278 NW
COVINGTON, GA 30014

TACO BELL
ENDEAVOR
"GO MOBILE"

INTERIOR ELEVATIONS KITCHEN

A8.3

www.LDILine.com
Order Plans @ www.LDILine.com